

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 8822-64

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. Mark location for plastic wall anchors, and then install plastic anchors into the wall.
3. Follow wiring instructions carefully (see fig.2)
4. Mount the fixture back plate to the wall with the plastic anchors and the wood screws (E).
5. Attach the loop (A) to the fixture body (C) by turning it clockwise until tight.
6. Place the socket sleeve (B) over the socket.
7. Attach the finial (D) to the fixture body (C) by turning it clockwise until tight.
8. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

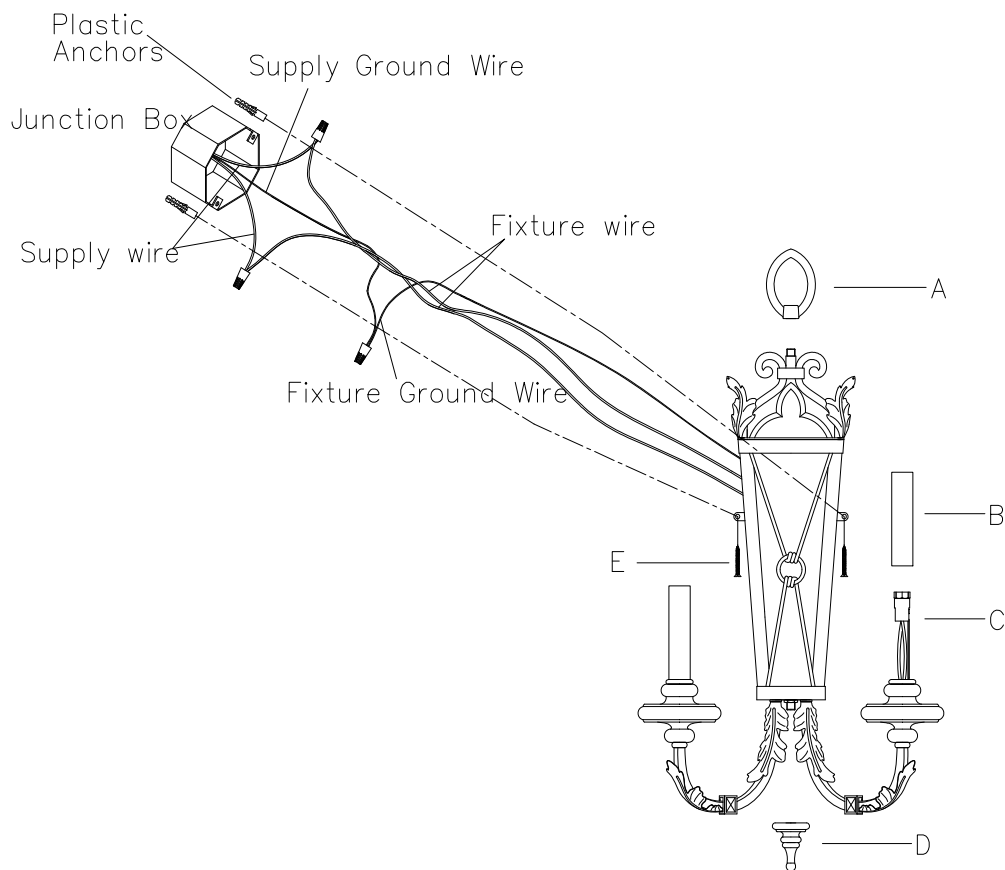


Fig.2

FIXTURE WIRES Black or Smooth		FIXTURE WIRES White or Ribbed		FIXTURE WIRES Bare Copper (Ground)	
HOUSE WIRES Black (Hot)		HOUSE WIRES White (Neutral)		HOUSE WIRES Green or Bare Copper (Ground)	