

MODERN FORMS  
A WAC LIGHTING COMPANY

2016



Omni	P.145-146
Torch	P.147-148
Sentinel	P.149-150
Jedi	P.151-152
Helix	P.153-154
Origami	P.155-156
Origin	P.157-158
Boule	P.159-160
Lucid	P.161-162
Deco	P.163-164
Structure	P.165-166
Burlington	P.167-168
Suspense	P.169-170
Pasadena	P.171-172
Balthus	P.173-174
Vitrine	P.175-176
Pandora	P.177-178
Kyoto	P.179-180
Berkley	P.181-182
Twist	P.183-184
Digitus	P.185-186
Oath	P.187-188
Rain	P.189-190
Hiline	P.191-192
Urban	P.193-194
Mega	P.195-196
Vessel	P.197-198
Bloc	P.199-200

#### LED Interior & Exterior Pendants & Flush Mounts

Warlock	P.203-204
Suspense	P.205-206
Lucid	P.207-208
Vessel	P.209-210
Bloc	P.211-212

Circa	P.213-214
Matrix	P.215-216
Ledge	P.217-218

#### LED Interior Pendants, Chandeliers & Flushmounts

Tango	P.221-222
Marimba	P.223-224
Gilt	P.225-226
Blaze	P.227-228
BDSM	P.229-230
Davos	P.231-232
Acid	P.233-234
Magic	P.235-238
Soleil	P.239-240
Ethereal	P.241-242
Swing	P.243-244
Punk	P.245-248
Loft	P.249-250
Dune	P.251-252
Circa	P.253-254
Sprocket	P.255-256
Matrix	P.257-258
Razor	P.259-260
Neo	P.261-262

#### LED Task

Disc	P.265-266
Boxie	P.267-268
Suspension	P.269-272
Dove	P.273-276
Balance	P.277-280
Flat	P.281-284

A modern bathroom vanity setup. The vanity is a white cabinet with four drawers, each featuring a small, dark, square handle. On top of the cabinet is a white countertop with two chrome faucets. A large, rectangular mirror is mounted on the wall above the vanity. On either side of the mirror are two vertical LED sconces with a textured, frosted glass design. A small potted plant in a white container sits on the countertop to the right of the faucets. The background wall is a dark, textured grey.

LED

Bath and Interior Sconces







[www.modernforms.com](http://www.modernforms.com)


# Margin

Crisp white ceramic glazed glass and delicate wire encased in glass are layered for depth of field and visual interest to mock an illusory two-dimensional design. Satin nickel to complement sophisticated nickel bath hardware while making a modern statement.




- Laminated glass and ceramic glazed super white glass
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

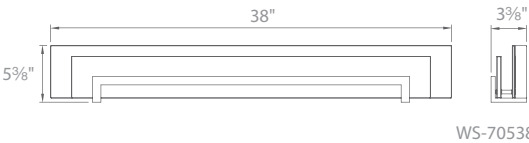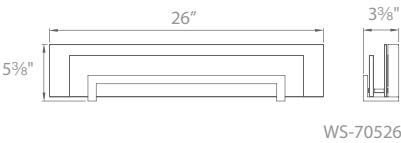

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-70526	26"	26W	120V	2123	916	SN Satin Nickel 
WS-70538	38"	45W		3503	1596	

Example: **WS-70526-SN**  
For 277V special order, add an "F" before the finish: **WS-70538F-SN**


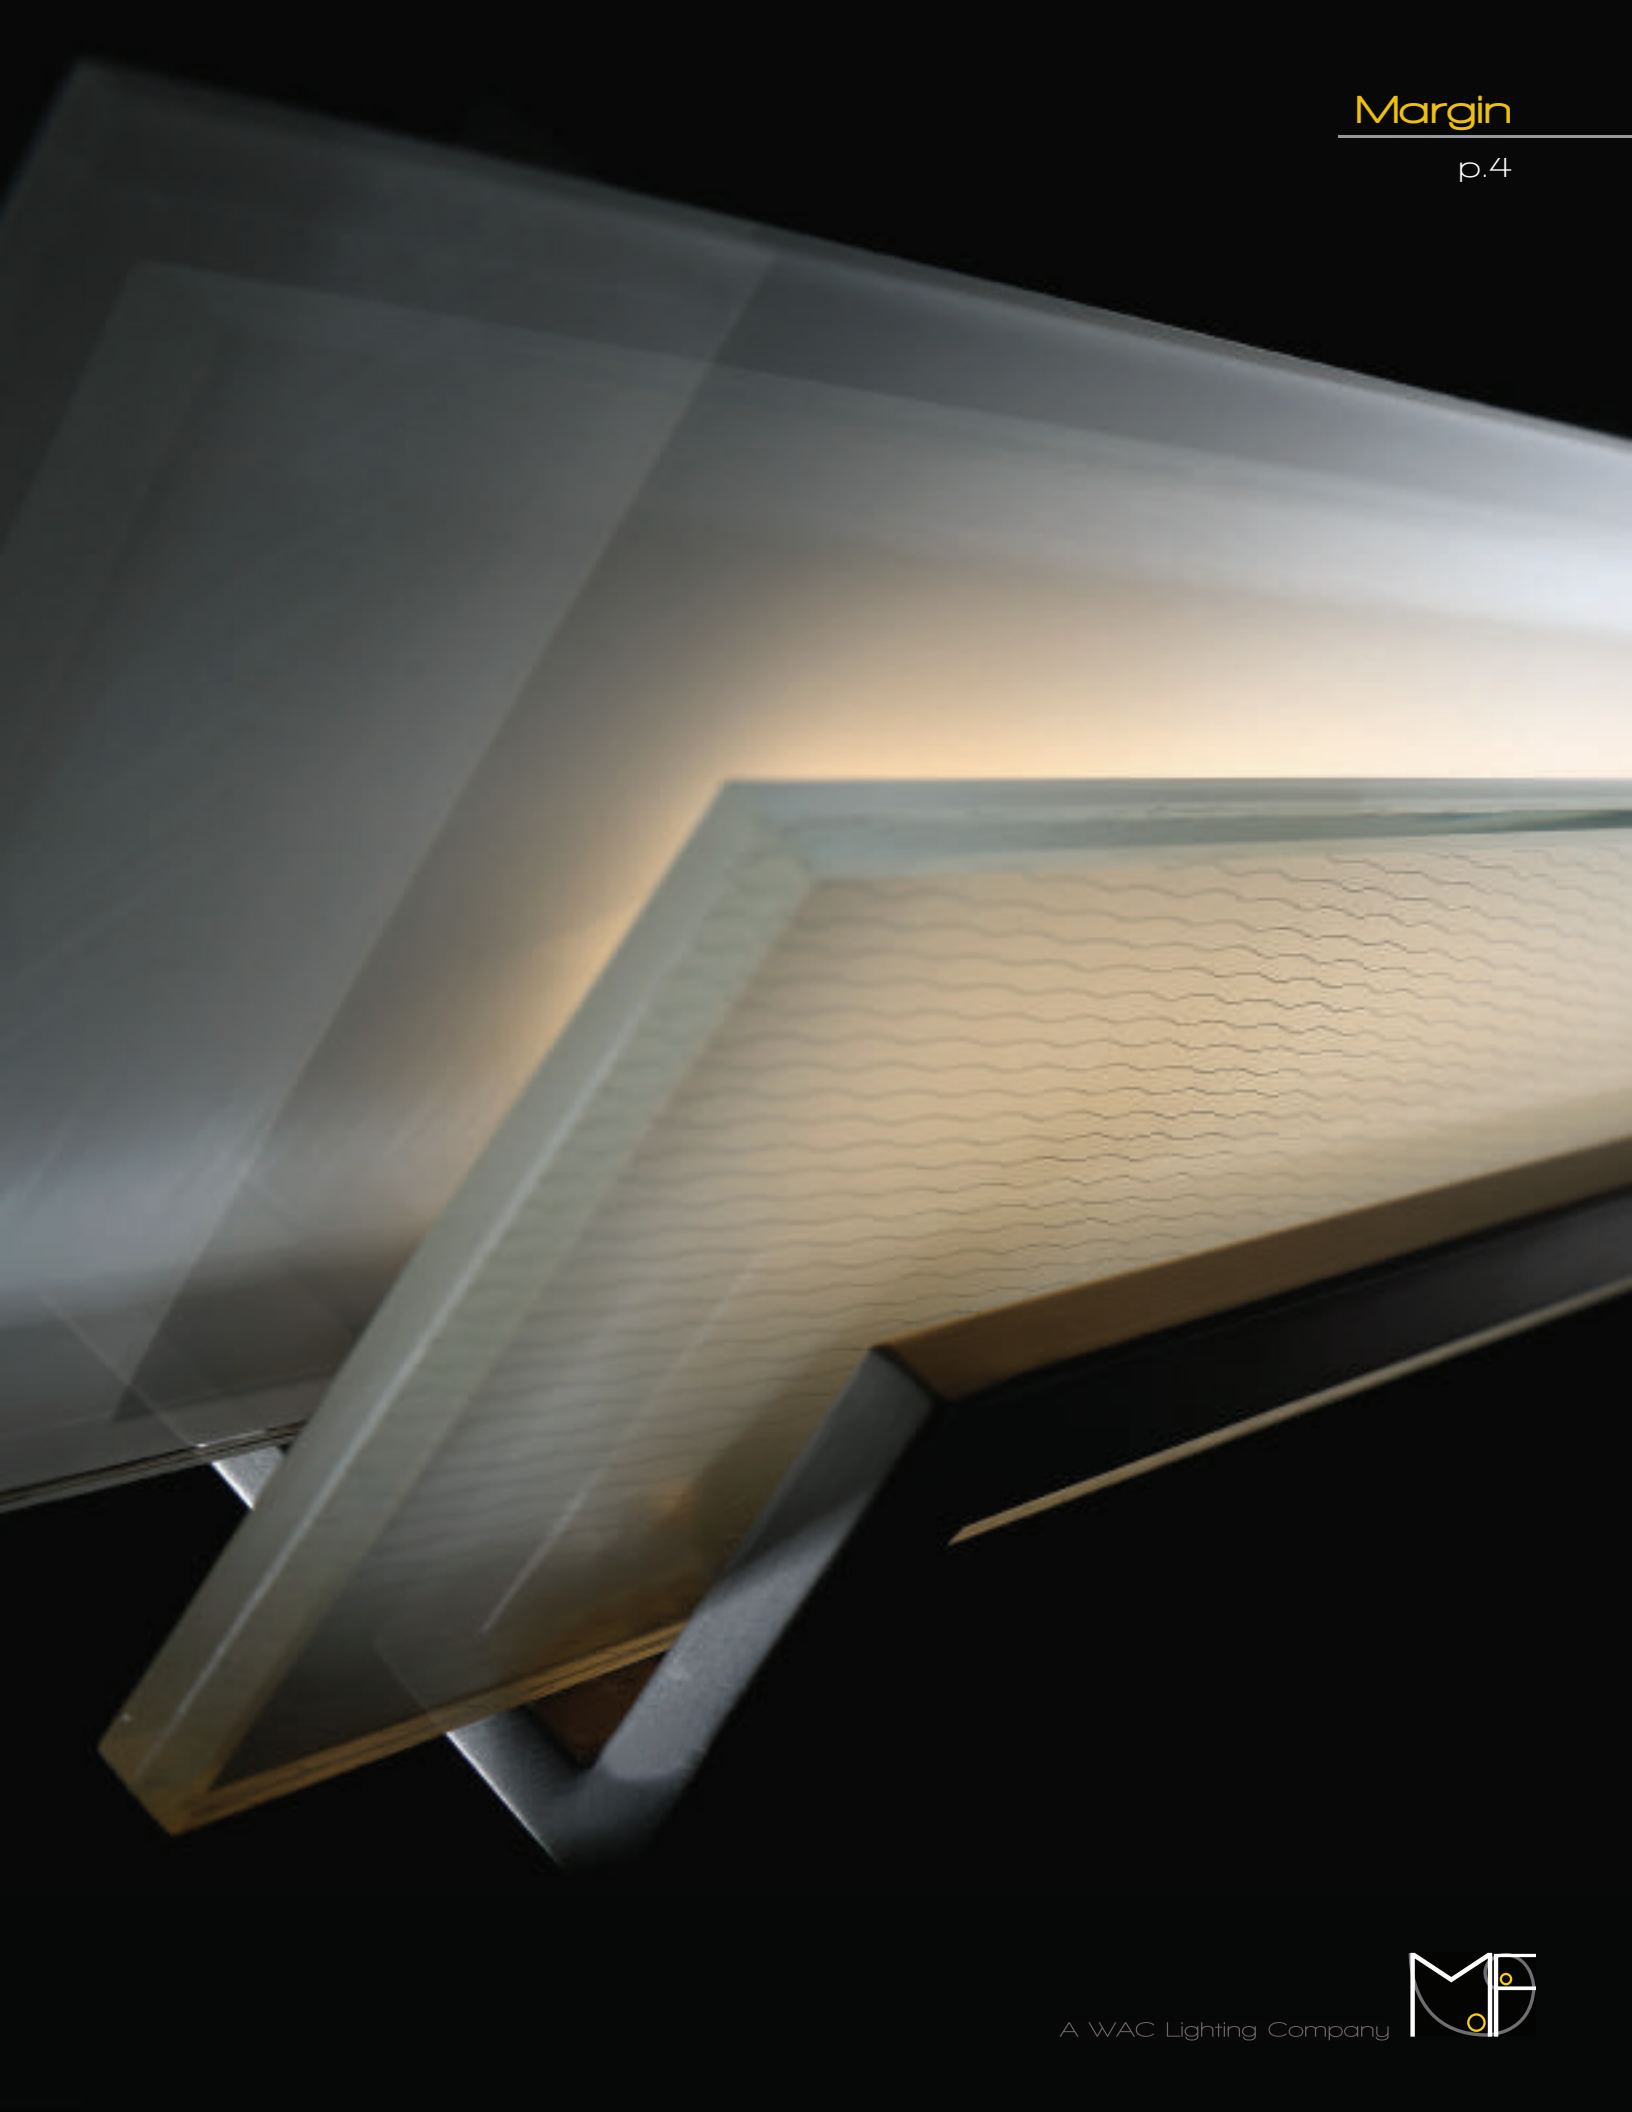



# Arko

Light is reflected off of a corrugated optic white glass extrusion for a decorative wash of indirect illumination. Alternatively rotate the cylindrical light source for powerful direct illumination when used in front of a mirror as a task light. Arko easily offers two looks and two lighting scenes. Use as a wall sconce or in a bath.




- Mount vertically or horizontally
- ADA compliant, low profile design
- Rotate lighting element for direct or indirect illumination
- Co-Extruded clear and white duplex acrylic cylinder
- Textured super white borosilicate glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 75,000 hour rated life
- Color Temp: 3500K
- CRI: 90

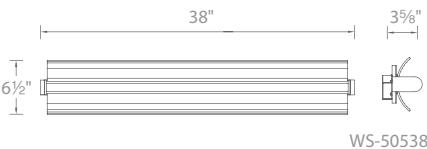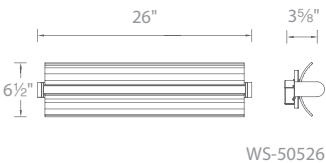

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-50526	26"	20W	120V-220V-277V	1725	1350	AL Brushed Aluminum 
WS-50538	38"	30W		2560	1950	

Example: WS-50526-AL



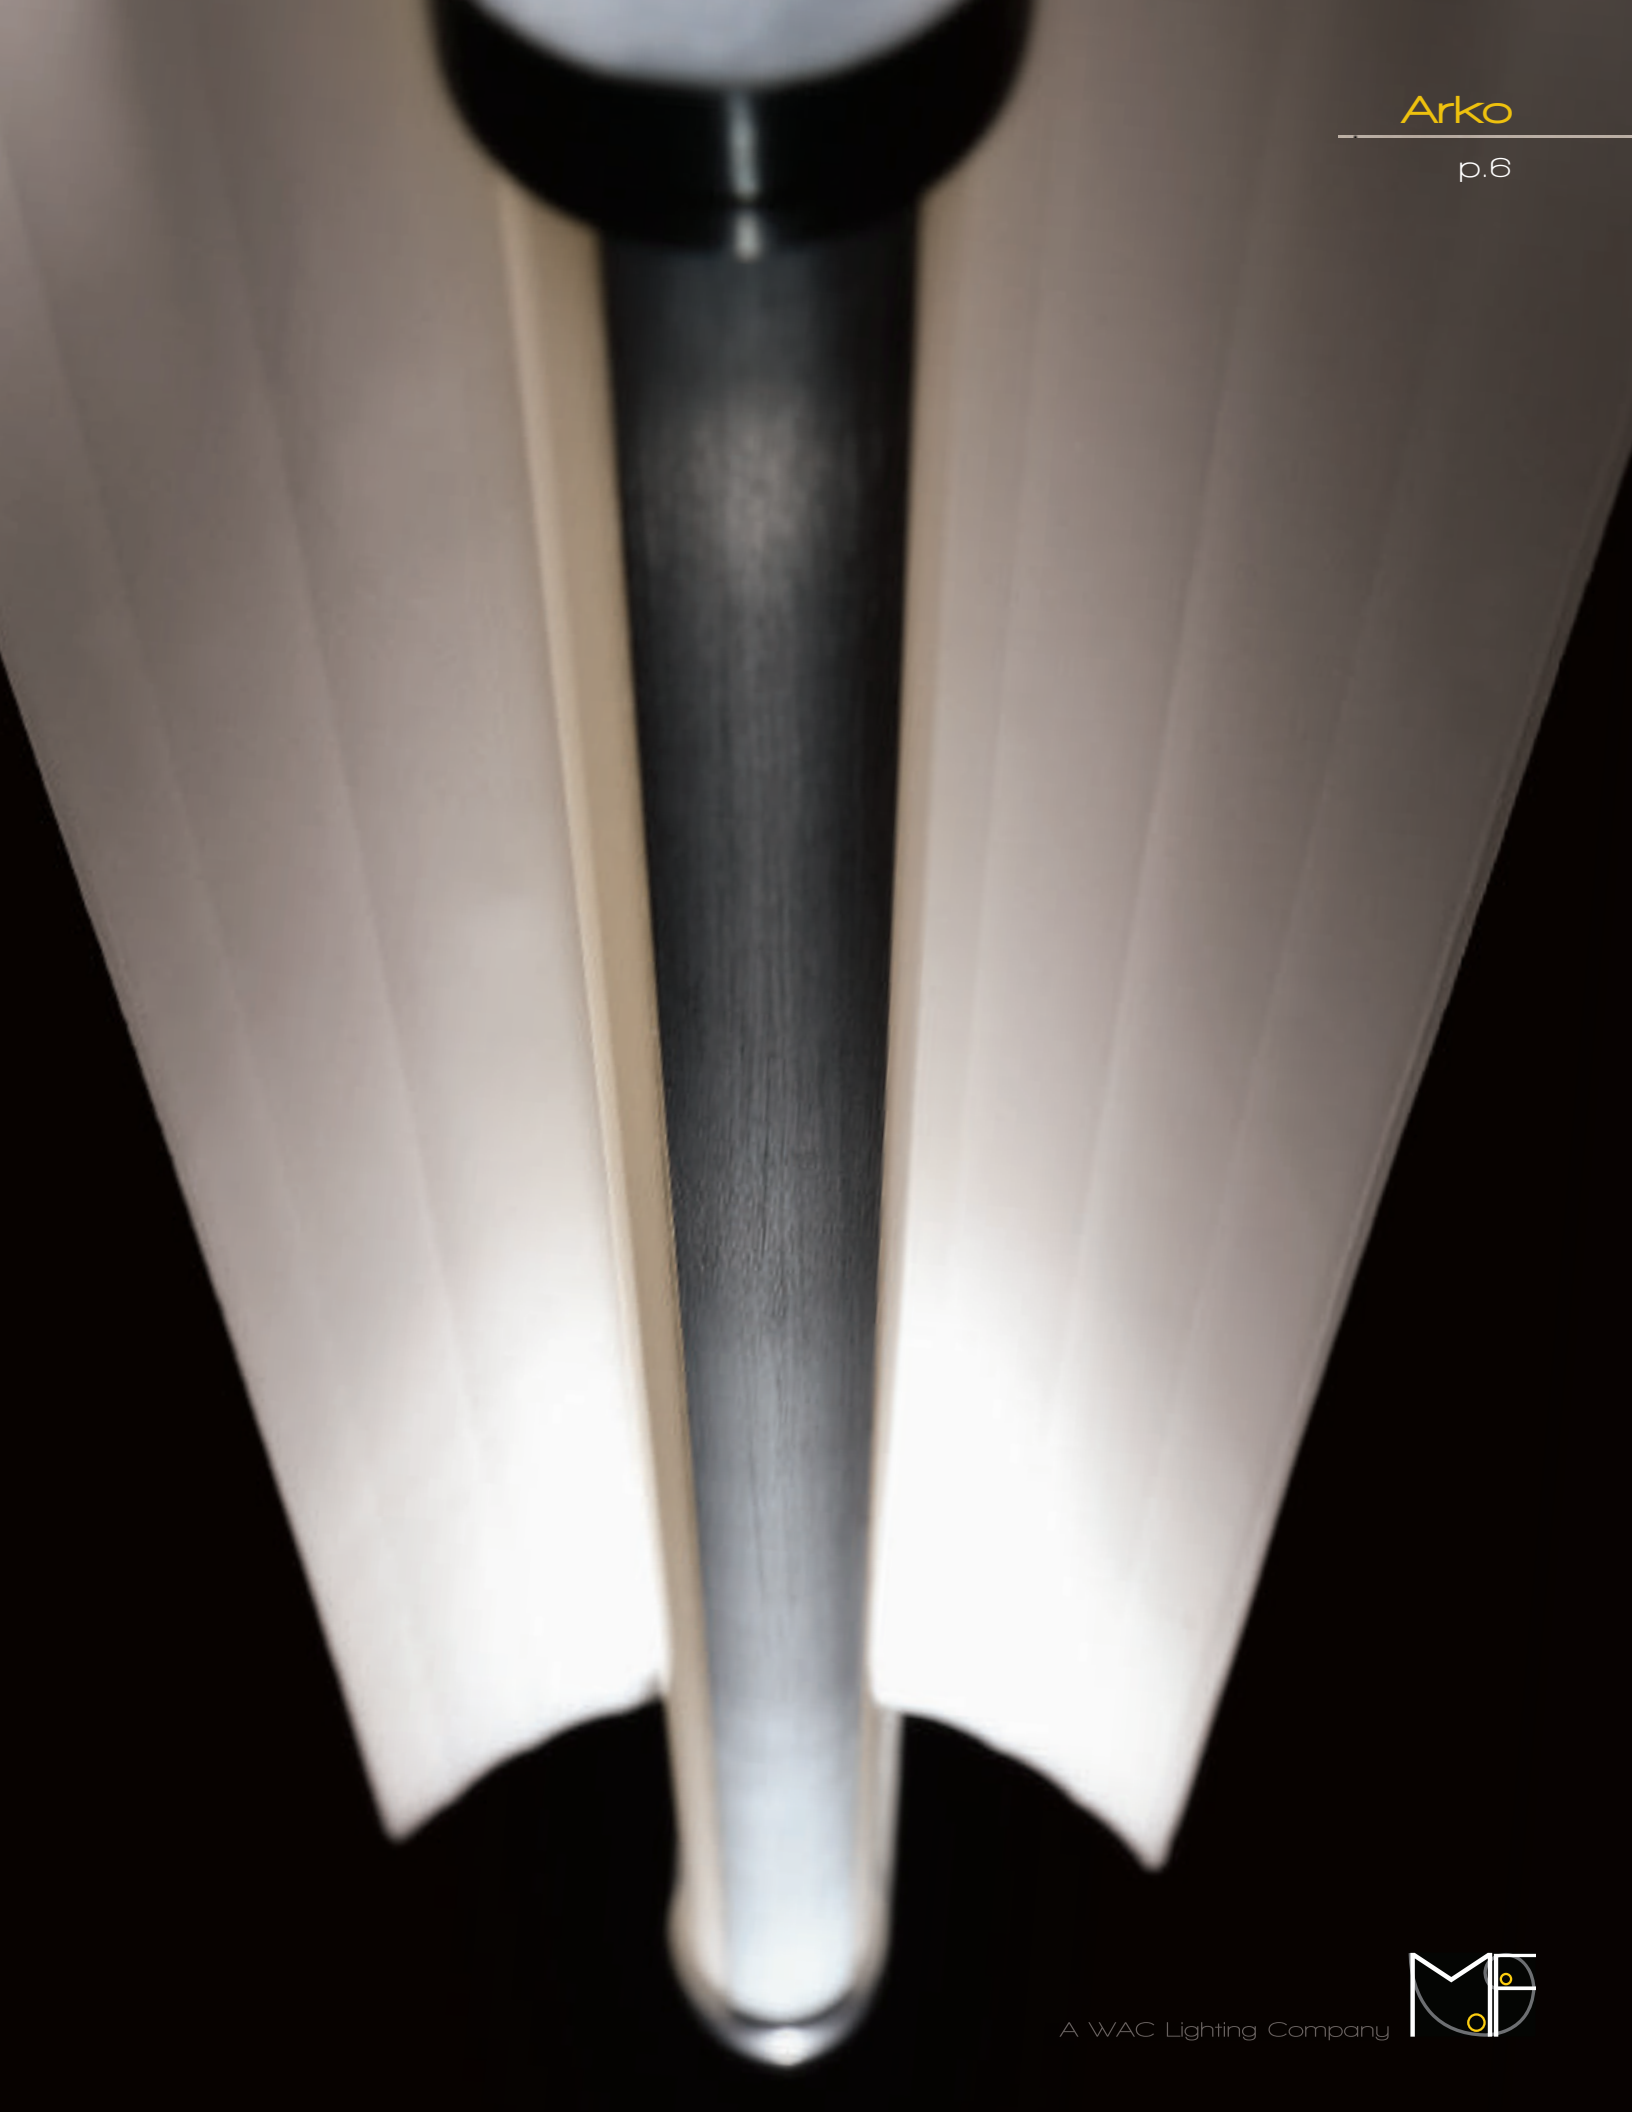


# Quantum


Opulent jewelry quality crystals artfully illuminated with multipoint source LED technology for a spectacle of shimmering sparkle. Elegant design combining exquisite optic hand cut crystals with powerful LED illumination with beautiful color rendition. Ideal as a vanity luminaire for fine baths or as an elegant wall sconce in luxury hotels and fine homes. Available in four sizes.




- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90




WS-41512




WS-41518



WS-41528



WS-41536

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-41512	12"	22.5W	120V	1278	740	PN Polished Nickel 
WS-41518	18"	37.5W		2117	1260	
WS-41528	28"	56.5W		3498	2025	
WS-41536	36"	78.5W		4439	2790	


Example: WS-41528-PN






# Sofia


Elegant as a classic tennis bracelet. Solid hand cut faceted crystals like oversized cushion-cut diamonds in a beautiful and shiny polished setting add a resplendent fashion statement with a touch of the grace of yesteryear to beautify any room. A vision of Hollywood, redefined.



WS-13619




WS-13630



WS-13641

- Clear hand cut crystal
- Luminaire may be rotated 90° when mounting
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3500K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-13619	19"	18W		1600	955	PN Polished Nickel 
WS-13630	30"	28W	120V	2400	1422	
WS-13641	41"	37W		3200	2028	

Example: WS-13619-PN




# Razor


Raze the standard for fine bath lighting with these cutting edge aesthetics that leave the ordinary behind. Thick walled glass is uniformly lit framed in polished stainless steel. Suited for today's interiors, from traditional to contemporary in bronze and stainless steel.




- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- Also available as flush mount for ceiling or walls. See page 259-260
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90




WS-47511



WS-47520



WS-47528



WS-47535


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-47511	11" 1 light	10W	120V	679	385	<b>BZ</b> Bronze <b>SS</b> Stainless Steel
WS-47520	20" 2 lights	19.5W		1287	690	
WS-47528	28" 3 lights	29.5W		1978	1090	
WS-47535	36" 4 lights	39.5W		2613	1500	

Example: **WS-47528-SS**




# Aegean

Emulating the calming effect of moving water. Elegant mouth blown white opal glass with cast metal framework. Mounts vertically or horizontally without transformer or driver as an elegant luminaire for a vanity or as an ADA scone in a foyer or hallway. Four sizes available.




WS-45512



WS-45522




WS-45531



WS-45541

- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-45512	12" 1 light	9.5W	120V	691	505	PN Polished Nickel 
WS-45522	21" 2 lights	19W		1369	1040	
WS-45531	31" 3 lights	28.5W		2017	1535	
WS-45541	41" 4 lights	39W		2840	2050	

Example: WS-45531-PN





# Vetri

Featuring stunning Piastra style glass, hand formed using techniques that date back to the 13th century. A clever indirect application of powerful LEDs in a linear format brings out sparkling highlights in the spaghetti glass while providing strong ambient illumination. Vetri's curvilinear profile will turn any bath or hotel corridor into an eye-popping experience.



- Mount vertically or horizontally
- ETL & cETL damp location listed
- Piastra hand made glass
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90




WS-3919



WS-3925




WS-3937

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3919	21"	31W		1880	1016	AL Brushed Aluminum 
WS-3925	27"	38W	120V	2500	1378	
WS-3937	39"	53W		3750	2345	

Example: WS-3919-AL



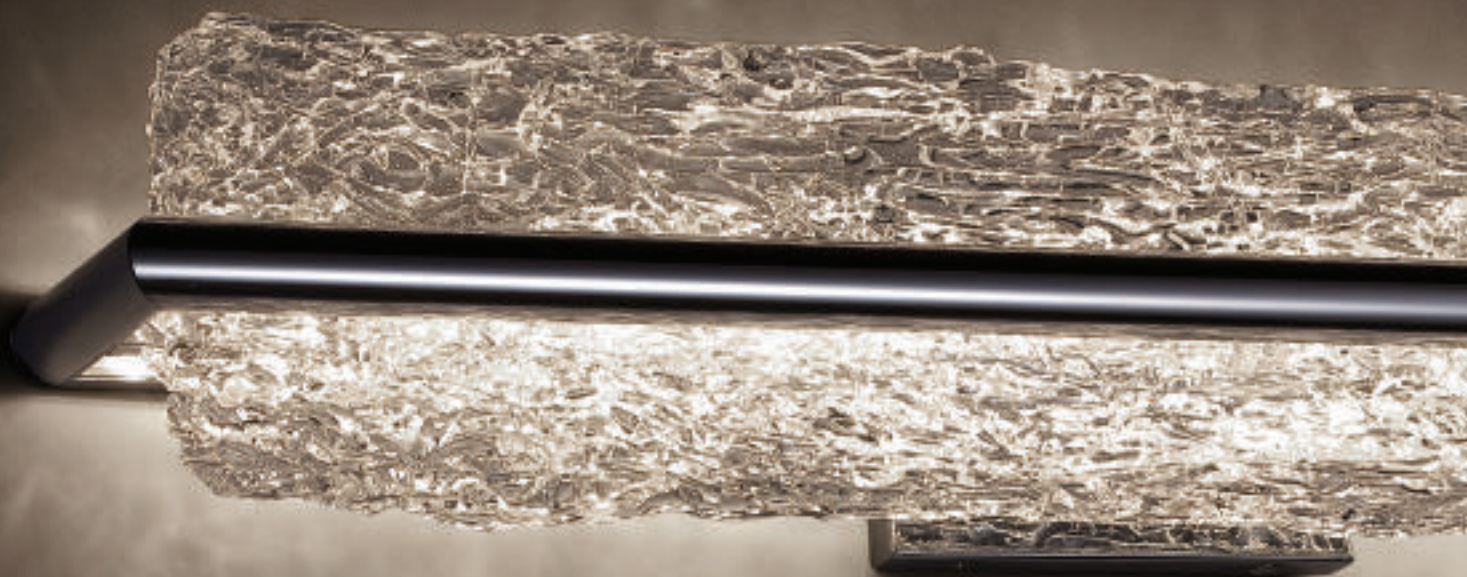


# Glacier


The brilliance of frozen ice. LEDs sparkle and shimmer mesmerizingly through weighty blocks of Piastra glass. One, two, three and four light configurations are offered for luxury baths and powder rooms. All available with the ultimate range of dimming controllability.




- ADA compliant, low profile design
- ETL & cETL damp location listed
- WS-6509 is CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6509	9" 1 light	14W	120V	1230	525	CH Chrome 
WS-6519	19" 2 lights	29W		2465	1100	
WS-6528	28" 3 lights	44W		3695	1820	
WS-6537	37" 4 lights	58W		4925	2285	


Example: WS-6509-CH




WS-6509




WS-6519

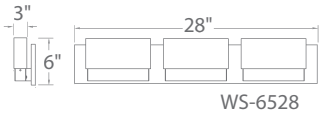

WS-6528

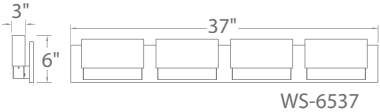


WS-6537

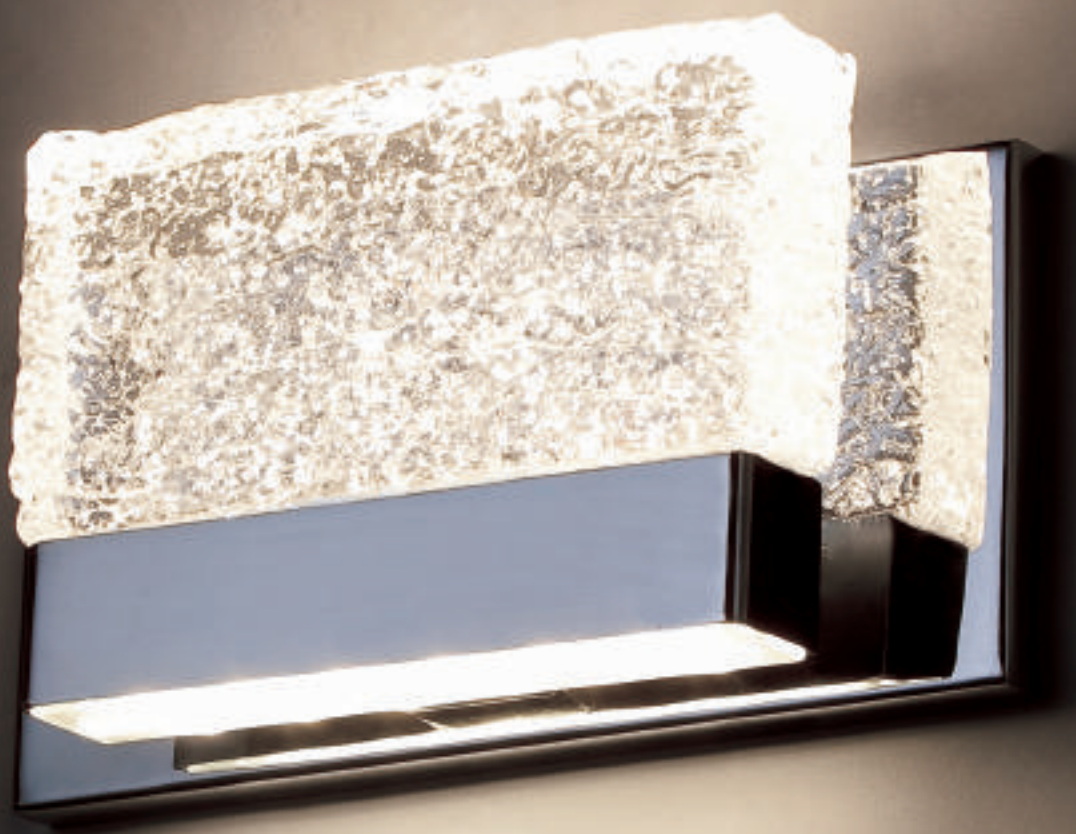


# Fusion


An elegant LED bath light design, mouth blown opal glass shades accented with art glass, hand formed with 13th century craftsmanship. Quality illumination from the most advanced lighting technology engineered for color rendering, superior brightness, and dimming control.



WS-6028




WS-6036



WS-6045

- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6028	28" 3 lights	32W		2490	1025	BN <i>Brushed Nickel</i> 
WS-6036	36" 4 lights	42W	120V	3320	1955	
WS-6045	45" 5 lights	52W		4150	2515	

Example: WS-6028-BN





# Vogue

From transitional to contemporary, the Vogue family coordinates with popular bath hardware and metal finishes. An extensive range of LED wall luminaires are available for every application and environment. Crafted of mouth blown etched opal glass and designed with hidden hardware, these luminaires offer powerful lumen output and excellent color rendering.


- See page 23-24 for complementary bath vanities & sconces
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90




Brushed Nickel



Chrome



WS-2909



WS-2917

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-2909</b>	11"	17W	120V	940	340	<b>BN</b> Brushed Nickel
<b>WS-2917</b>	17"	26W		1566	705	<b>BZ</b> Bronze
						<b>CH</b> Chrome

Example: **WS-2909-BN**


For 277V special order, add an "F" before the finish: **WS-W2909F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W2917-27-BN**




Chrome

Bronze



WS-3111



WS-3115

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-3111</b>	11"	16W	120V	938	410	<b>BN</b> Brushed Nickel
<b>WS-3115</b>	15"	21W		1250	590	<b>BZ</b> Bronze
						<b>CH</b> Chrome

Example: **WS-3111-BN**

For 277V special order, add an "F" before the finish: **WS-W3111F-BN**

For 2700K add "-35" before the finish: **WS-W3111-35-BN**





# Vogue

From transitional to contemporary, the Vogue family coordinates with popular bath hardware and metal finishes. An extensive range of LED wall luminaires are available for every application and environment. Crafted of mouth blown etched opal glass and designed with hidden hardware, these luminaires offer powerful lumen output and excellent color rendering.



Brushed Nickel



Chrome




Bronze


- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available special order
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90



WS-3120

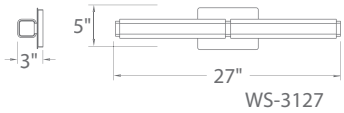

WS-3127

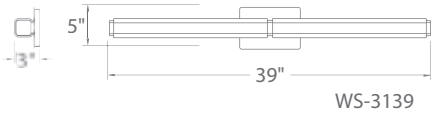

WS-3139

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3120	20"	30W		1875	970	BN Brushed Nickel
WS-3127	27"	38W	120V	2500	1160	BZ Bronze
WS-3139	39"	53W		3750	1740	CH Chrome

Example: **WS-3120-BN**  
For 277V special order, add an "F" before the finish: **WS-W3120F-BN**  
For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W3120-27-BN**



# Loft

This modern design is highlighted with contoured etched opal glass that creates a striking aesthetic. Ideal for installation in fine baths and hallways, as well as patios, porches and other damp locations.

- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K / 2700K / 3500K available special order
- CRI: 90



May mounted vertically or horizontally




Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-3611</b>	11"	9W	120V	1235	630	<b>BN</b> Brushed Nickel <b>CH</b> Chrome


Example: **WS-3611-BN**  
For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3611-27-BN**

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-3618</b>	18"	30.5W		2030	1445	<b>BN</b> Brushed Nickel <b>CH</b> Chrome
<b>WS-3624</b>	24"	37.5W	120V	2720	1930	
<b>WS-3632</b>	32"	50W		3725	2905	


Example: **WS-3624-BN**  
For 2700K add "-27"; 3500K add "-35" before the finish: **WS-3632-35-CH**




WS-3611



WS-3618



WS-3624

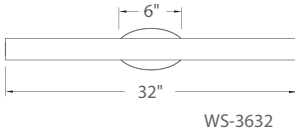

WS-3632




# Sabre


On the cutting edge of technology and aesthetics, bath lighting can now be both refined and robust. A sleek look with durable and optically enhanced coextruded acrylic diffuser, this water-tight design is complete with state of the art LED. Adapts to any space with vertical or horizontal mounting.




- Mount vertically or horizontally
- 1/4" thick wall co-extruded clear and white optical acrylic
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Conversion plate for 4" J box included
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3500K
- CRI: 90

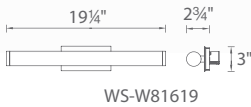


WS-W81619

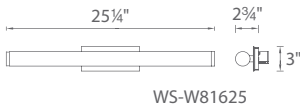

WS-W81625

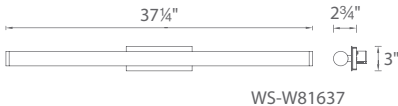

WS-W81637

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W81619	19 1/4"	15W	120V-220V-277V	1500	1010	AL Brushed Aluminum 
WS-W81625	25 1/4"	20W		1725	1375	
WS-W81637	37 1/4"	30W		2560	2130	

Example: WS-W81619-AL






# Slat


A sliver of light illuminates a dressing room, bath or corridor with a soft, flattering glow. This slim and shallow design with crisp edges and a brushed aluminum frame simply modernizes any decor.



- Advanced Edge Lit Technology
- Mount vertically, horizontally, or on ceiling
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Conversion plate for 4" J box included
- 277V option available special order
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-80618	18"	13W		1129	378	AL Brushed Aluminum 
WS-80624	24"	19W	120V	1504	537	
WS-80636	36"	25W		1860	780	

Example: **WS-80618-AL**  
For 277V special order, add an "F" before the finish: **WS-80624F-AL**

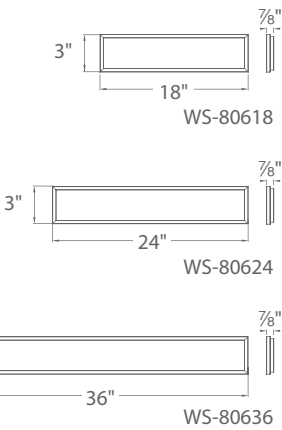






# Neo


Marvel at this ultra-thin sconce and vanity light collection which adapts the latest technology from the television and display industry, to create phenomenal light output. This luminaire boasts a depth from the wall of less than an inch. The amazing uniform light is free from glare, hot spots and color-over-angle changes. Place above or alongside a mirror for a modern geometric display of two-dimensional rectilinear forms. Create a dramatic display of wall art with an arrangement of these modular units.

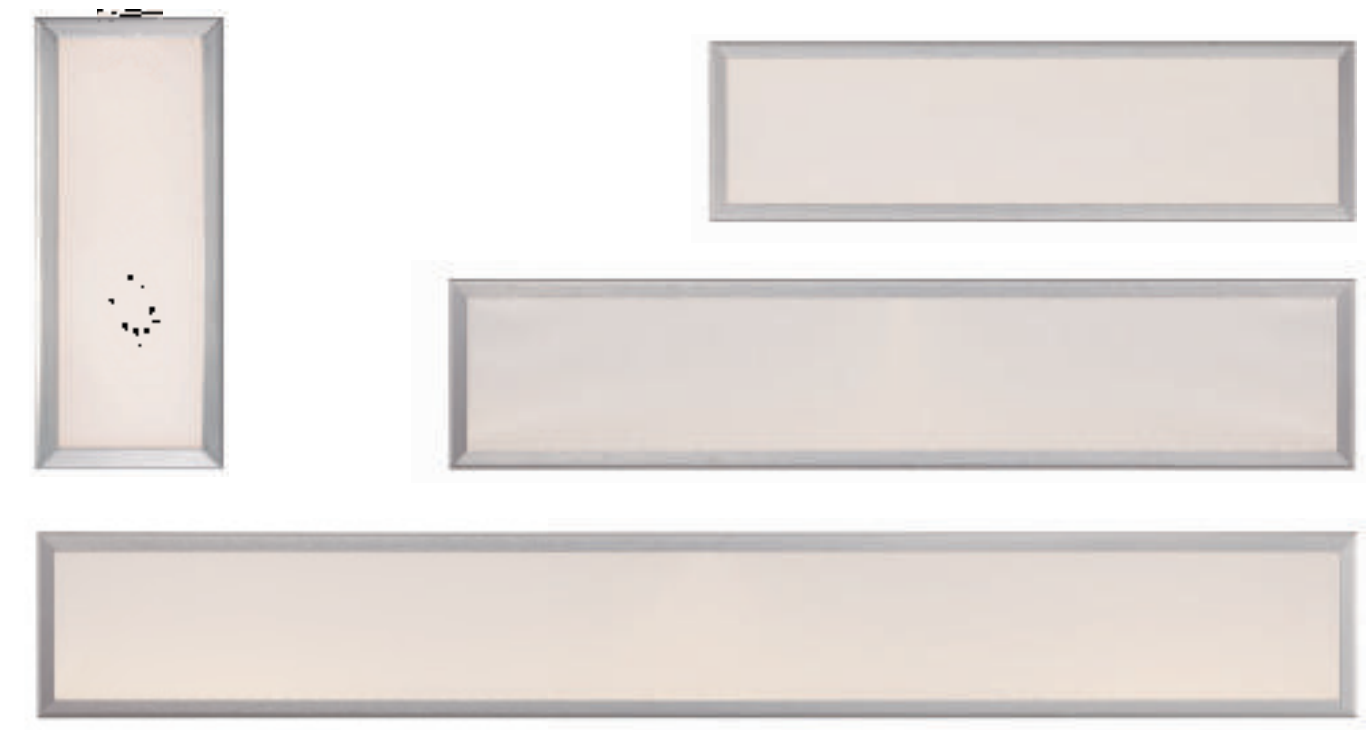

- Mount vertically, horizontally, or on ceiling
- Advanced Edge Lit Technology
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3712	12"	13W	120V	970	500	AL Brushed Aluminum
WS-3718	18"	24W		2258	947	
WS-3724	24"	31W		3008	1220	
WS-3736	36"	41W		3720	1697	

Example: WS-3712-AL

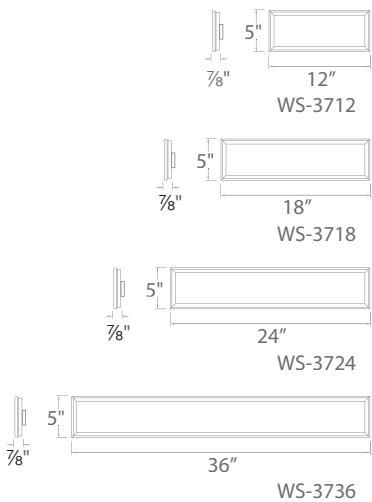



# Ledge

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Six adaptable sizes allow for cohesive specifications across residential and commercial interior and exterior applications. See pages 35,115 and 217 for other available finishes and sizes for bath interior and exterior applications.




Bronze




Brushed Aluminum

- ADA compliant, low profile design
- ETL & cETL damp location
- WS-W1412 is IP65 wet location rated
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers\*
- 277V option available *special order*
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available *special order*
- CRI: 90



WS-1412

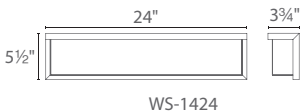

WS-1424



WS-1436

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W1412</b>	12"	29W		1200	690	<b>AL</b> <i>Brushed Aluminum</i> <b>BZ</b> <i>Bronze</i>
<b>WS-1424</b>	24"	55W	120V	2880	1455	
<b>WS-1436</b>	36"	91W		4566	2235	

Example: **WS-1436-BZ**

For 277V special order, add an "F" before the finish: **WS-1436F-BZ**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-1424-35-AL**





# Ledge

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Six adaptable sizes allow for cohesive specifications across residential and commercial interior and exterior applications. See pages 33, 115 and 217 for other available finishes and sizes for bath interior and exterior applications.




Bronze



Brushed Aluminum

- WS-W1414 & WS-W1420 are CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- 277V option available for WS-W1480, W1414, W1420 *special order*
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

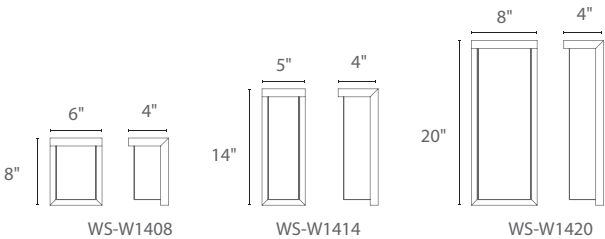

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1408	8"	11.5W		525	340	
WS-W1414	14"	19.5W	120V	910	670	AL Brushed Aluminum
WS-W1420	20"	29W		1575	1050	BZ Bronze

Example: **WS-W1420-AL**  
For 277V special order, add an "F" before the finish: **WS-W1420F-AL**





# Polar


New 18" size

The sleek design epitomizes the use of modern materials with state of the art LED technology to create a refined urban luminaire. Features crisp edges of mitered glass and optimally engineered with a maximum amount of LEDs for a wide range of bath lighting and ambient illumination in luxury hotel corridors and other spaces.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Mitered glass construction
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

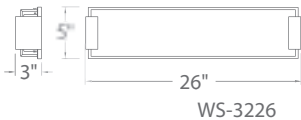

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3218	18"	38W		2139	720	BN Brushed Nickel 
WS-3226	26"	50W	120V	3750	960	
WS-3240	40"	82W		5625	2055	

Example: WS-3226-BN

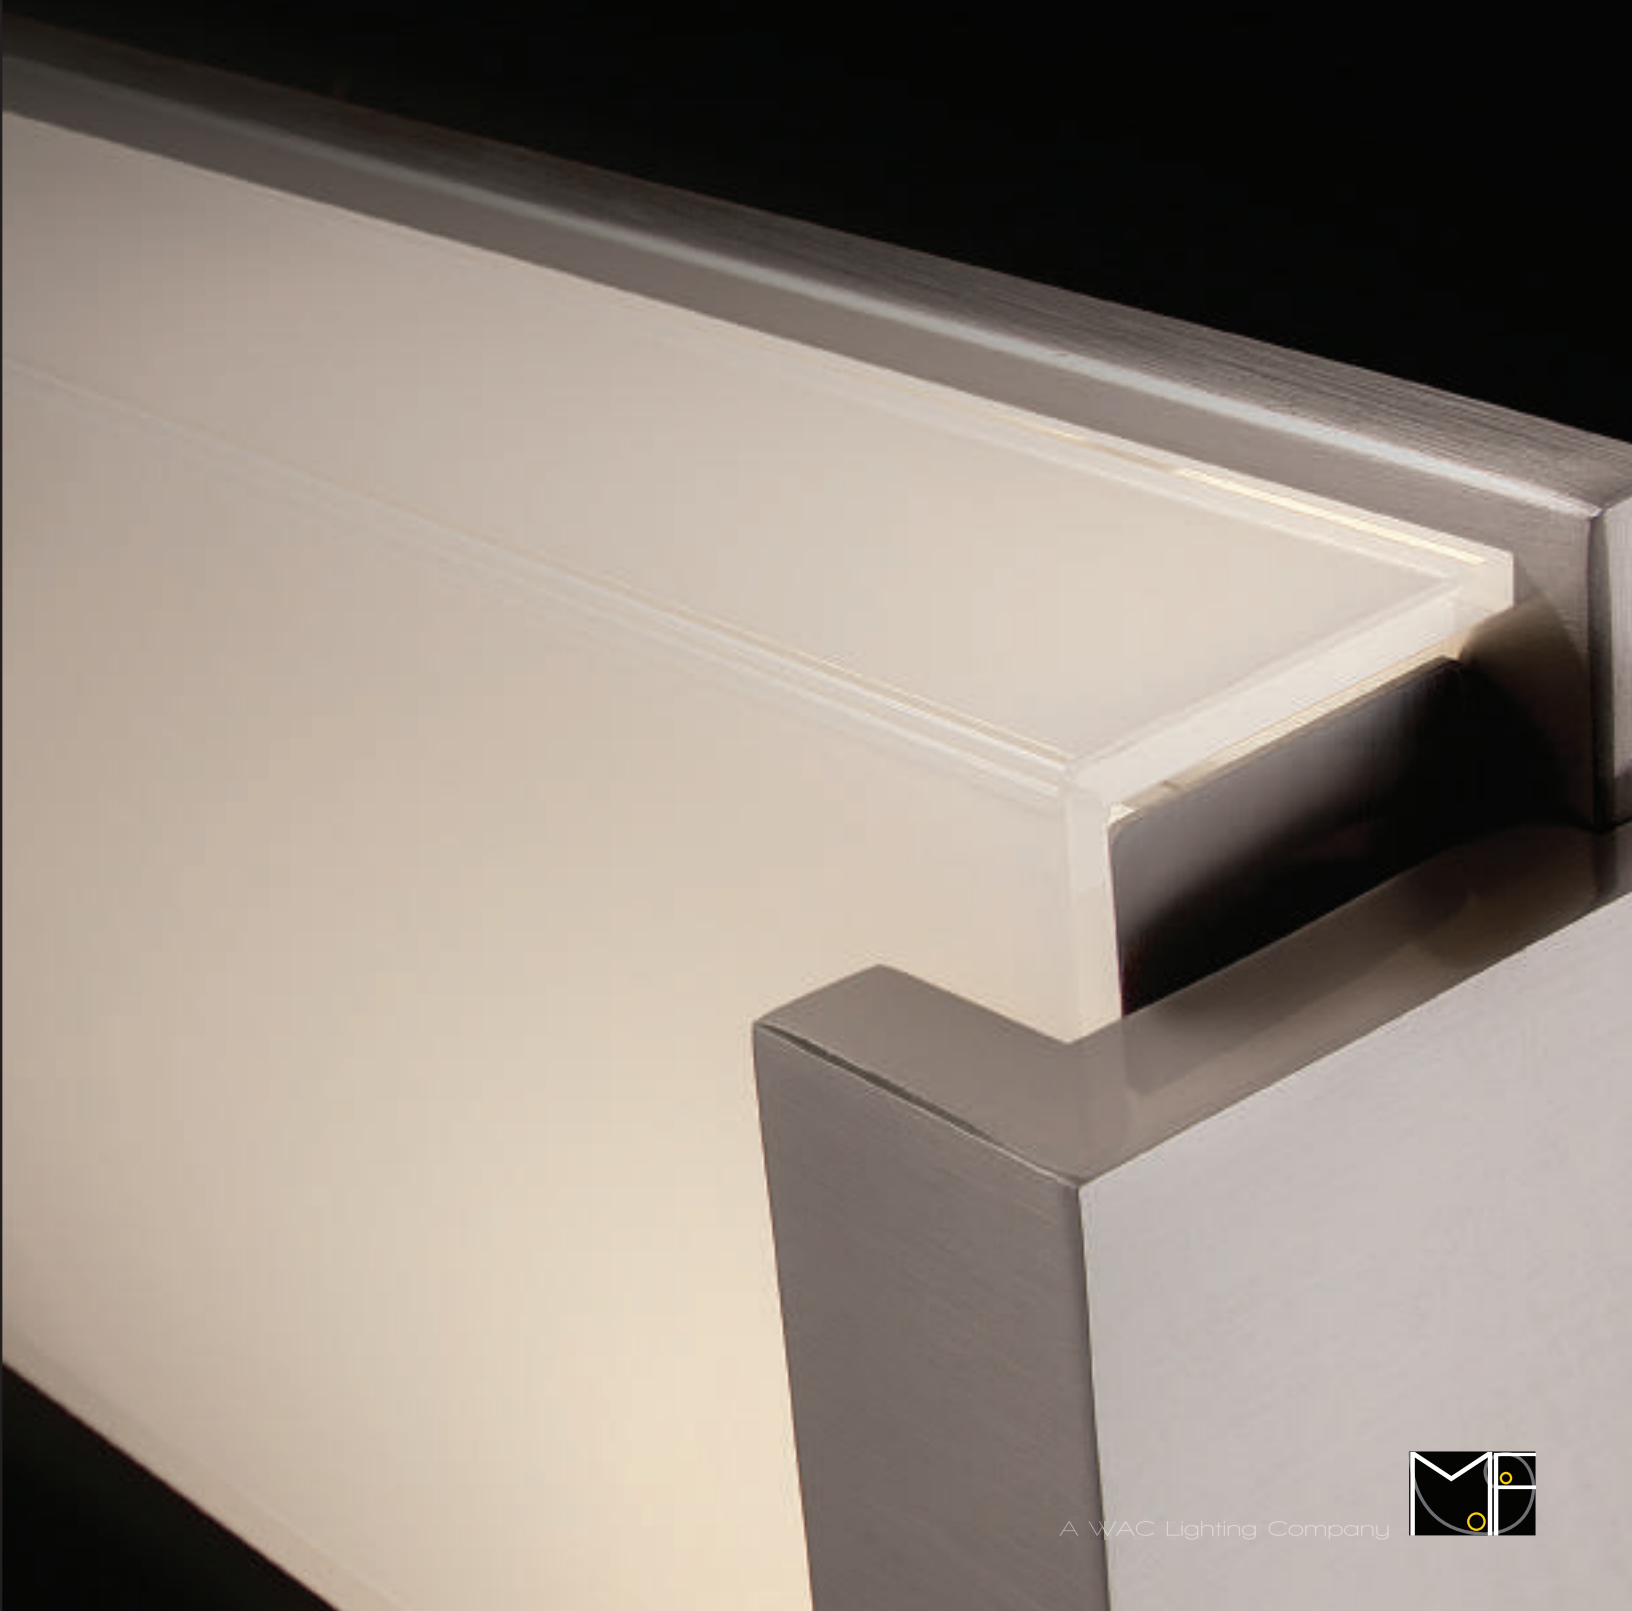


# Stencil


Refinement through definition. A distinctively engineered look with simple hardware lines manufactured with instrument precision. A silk-screened ceramic glazed glass conceals proprietary LED luminaires in a classic architectural design.




- 6mm silk screened ceramic glazed glass
- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Replaceable LED module
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available special order
- 50,000 hour rated life
- Color Temp: 3500K
- CRI: 90

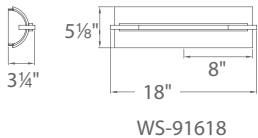

WS-91618

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-91618	18"	22W	120V	2050	850	SN Satin Nickel 
WS-91628	28"	35W		3270	1528	

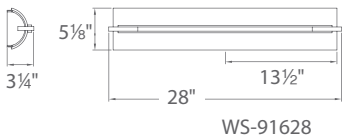

WS-91628

Example: **WS-91618-SN**  
For 277V special order, add an "F" before the finish: **WS-91618F-SN**





# Arc


On the cutting edge of fine bath lighting, Arc embodies unique contemporary styling. Illuminating from three sides for maximum functional light output as a bath vanity, or using the included chrome shield option to transition it into a chic powder room piece or home theater sconce.



*shown with optional metal light shield*




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Clear and silk screened glass
- Optional chrome metal shield included
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED modules
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

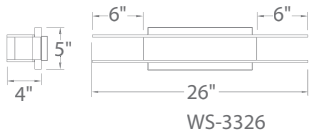


WS-3326



WS-3338

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens w/o shield	Delivered Lumens w/ shield	Finish
WS-3326	26"	22W	120V	1250	760	490	CH Chrome 
WS-3338	38"	38W		2500	1440	845	

Example: WS-3326-CH

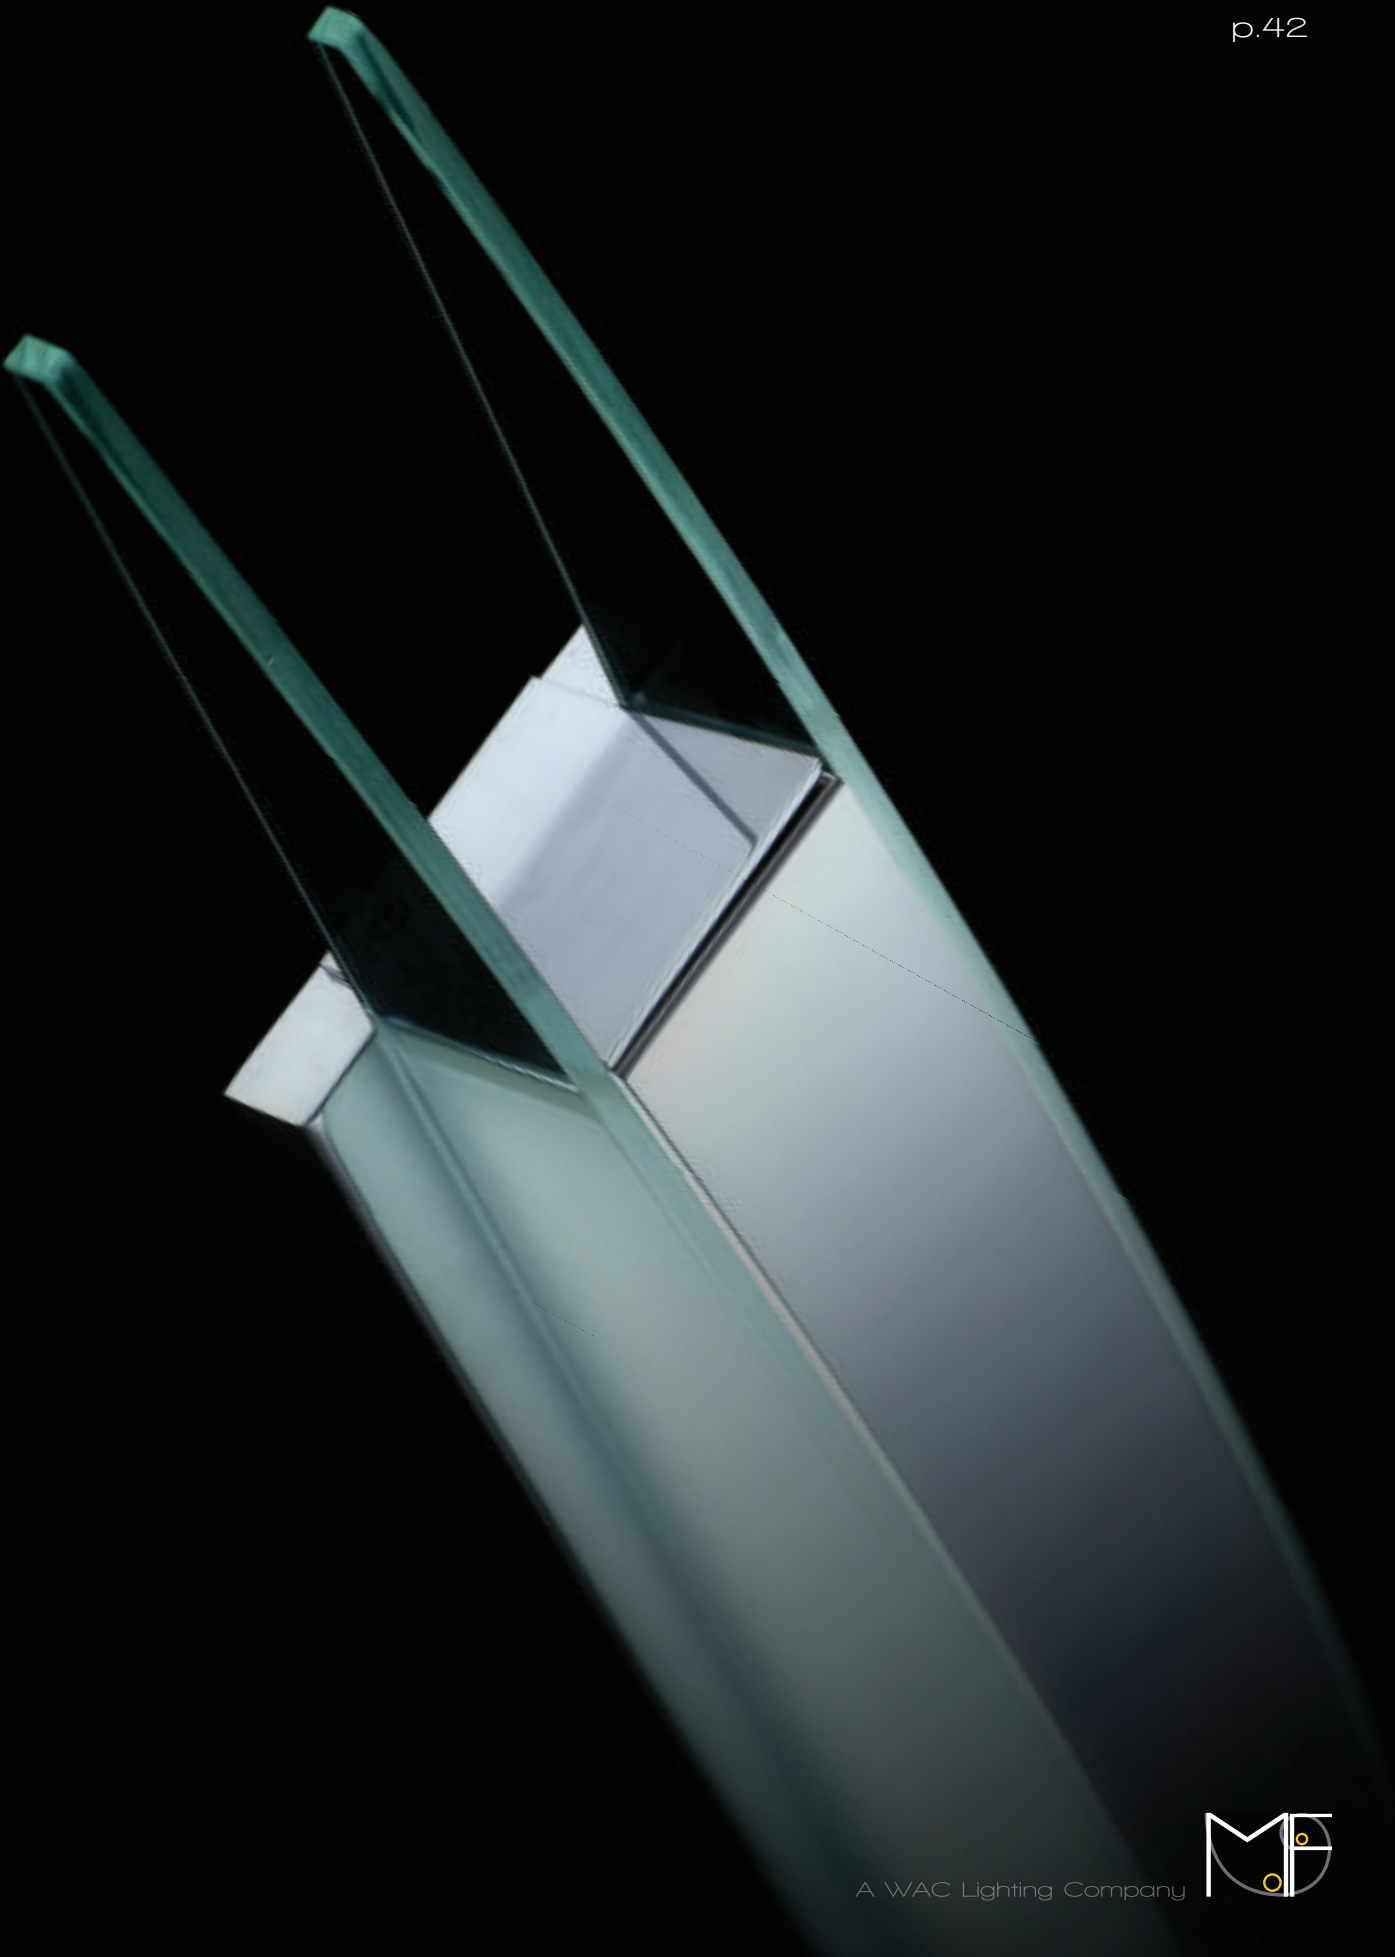


# Cloud


Cloud combines a distinguished contemporary rectilinear profile with exaggerated proportions and concealed hardware. Designed to complement a diverse range of architectural interiors while delivering high quality functional illumination for upscale spaces.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- When mounting as a bath light, larger sizes are recommended to maintain appropriate scale with vanities
- Mitered glass construction
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-3418	18"	15.5W		1199	655	CH Chrome 
WS-3428	28"	36.5W	120V	1982	916	
WS-3436	36"	40W		2171	1361	

Example: **WS-3428-CH**  
For 277V special order, add an "F" before the finish: **WS-3428F-CH**

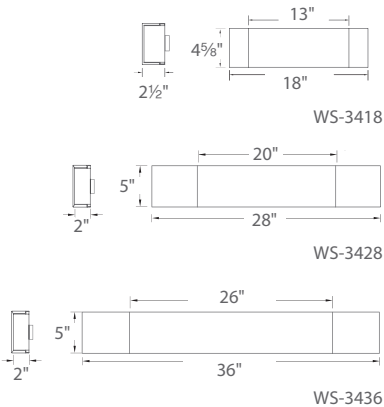







# Seismic


Classic architectural styling and flattering light intersect in this open grid structure with an etched white glass layer. Accented with braces and struts in an elaborate design. Mounts vertically or horizontally as a vanity light in baths or as a wall sconce in corridors.

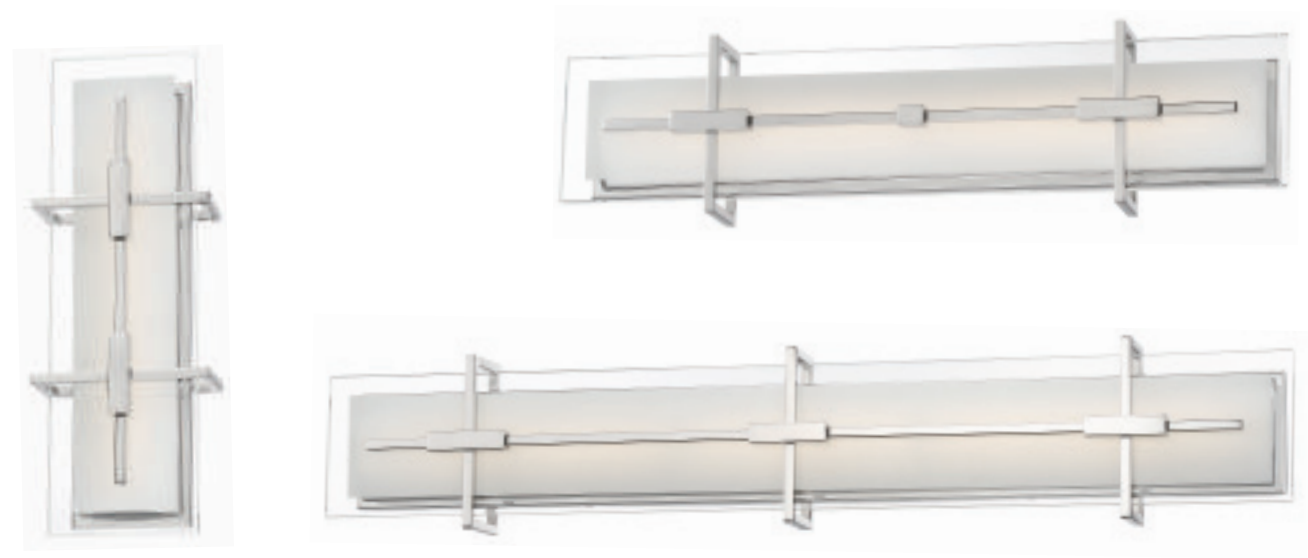

- ADA compliant, low profile design
- ETL & cETL damp location listed
- Polished stainless steel material
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-46518	18"	25.5W		1508	590	SS Polished Stainless Steel 
WS-46527	27"	39W	120V	2537	1215	
WS-46537	37"	53W		3637	1625	


Example: WS-46527-SS

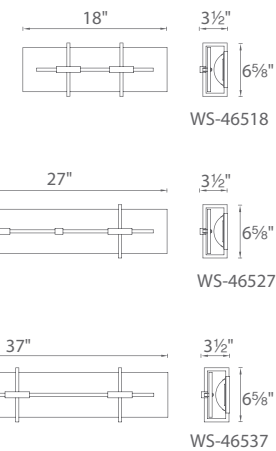




# Sheridan




A signature LED design. White ceramic-screened glass and a clear glass overlay create a double-layered, dimensional effect with crisp mitered edges. Uniform illumination from every angle in every size, in a shallow form factor made possible only with cutting edge technology. Use vertically or horizontally to accommodate different layouts for upscale baths, or corridors as a wall sconce.

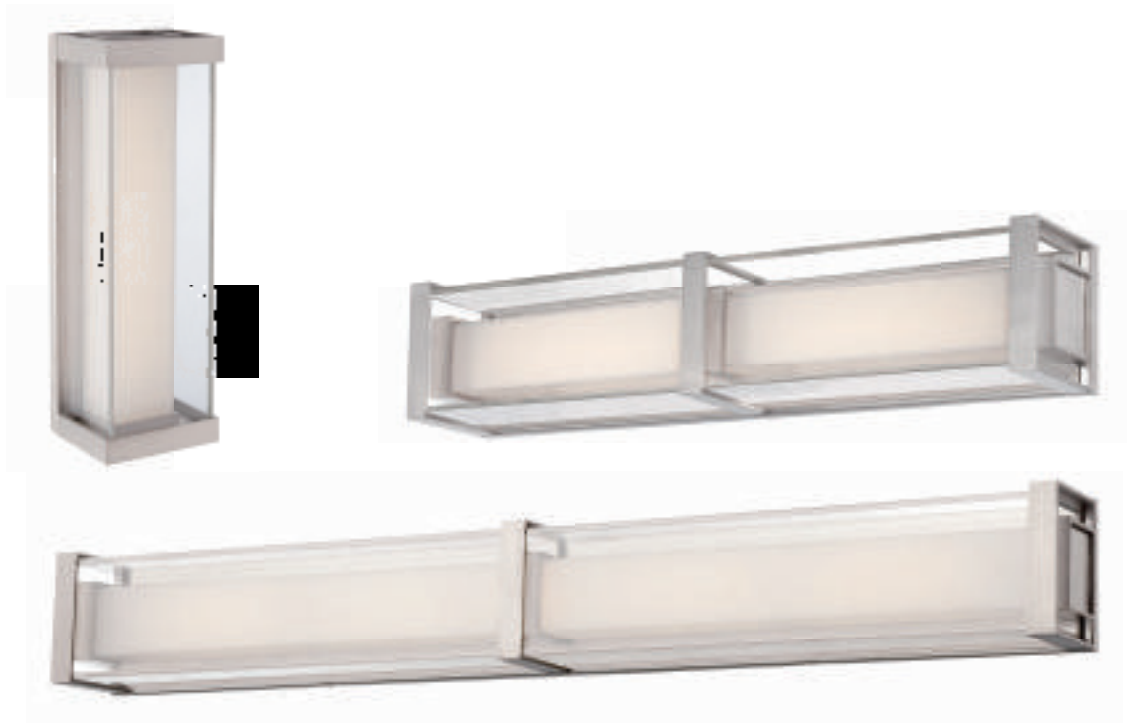

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6214	14"	19W		1615	790	BN Brushed Nickel 
WS-6224	24"	30W	120V	2470	1375	
WS-6236	36"	48W		4030	2155	

Example: **WS-6214-BN**  
For 277V special order, add an "F" before the finish: **WS-6214F-BN**

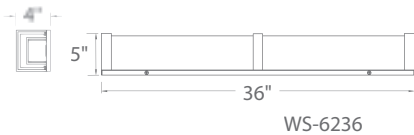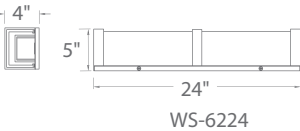



Sheridan


p.48

A WAC Lighting Company



# Bahn

Clean minimalism with Euro styling and advanced technology. Straight lines and homogenous surfaces are tailored with German precision and incorporated seamlessly with the latest in LED thinking. Flattering illumination from full spectrum LEDs. Horizontal and vertical configurations for a wide variety of settings.

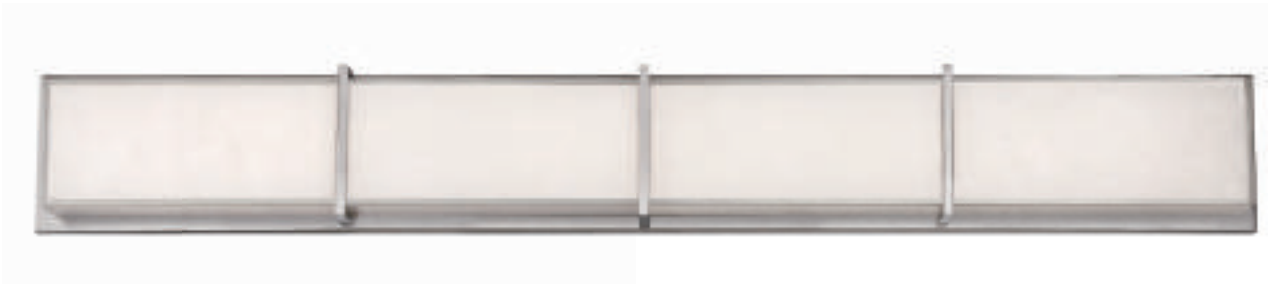


- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- WS-6826 is CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-6826




WS-6838

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6826	26"	38W	120V	3230	1440	BN Brushed Nickel 
WS-6838	38"	58W		4845	1815	

Example: WS-6826-BN



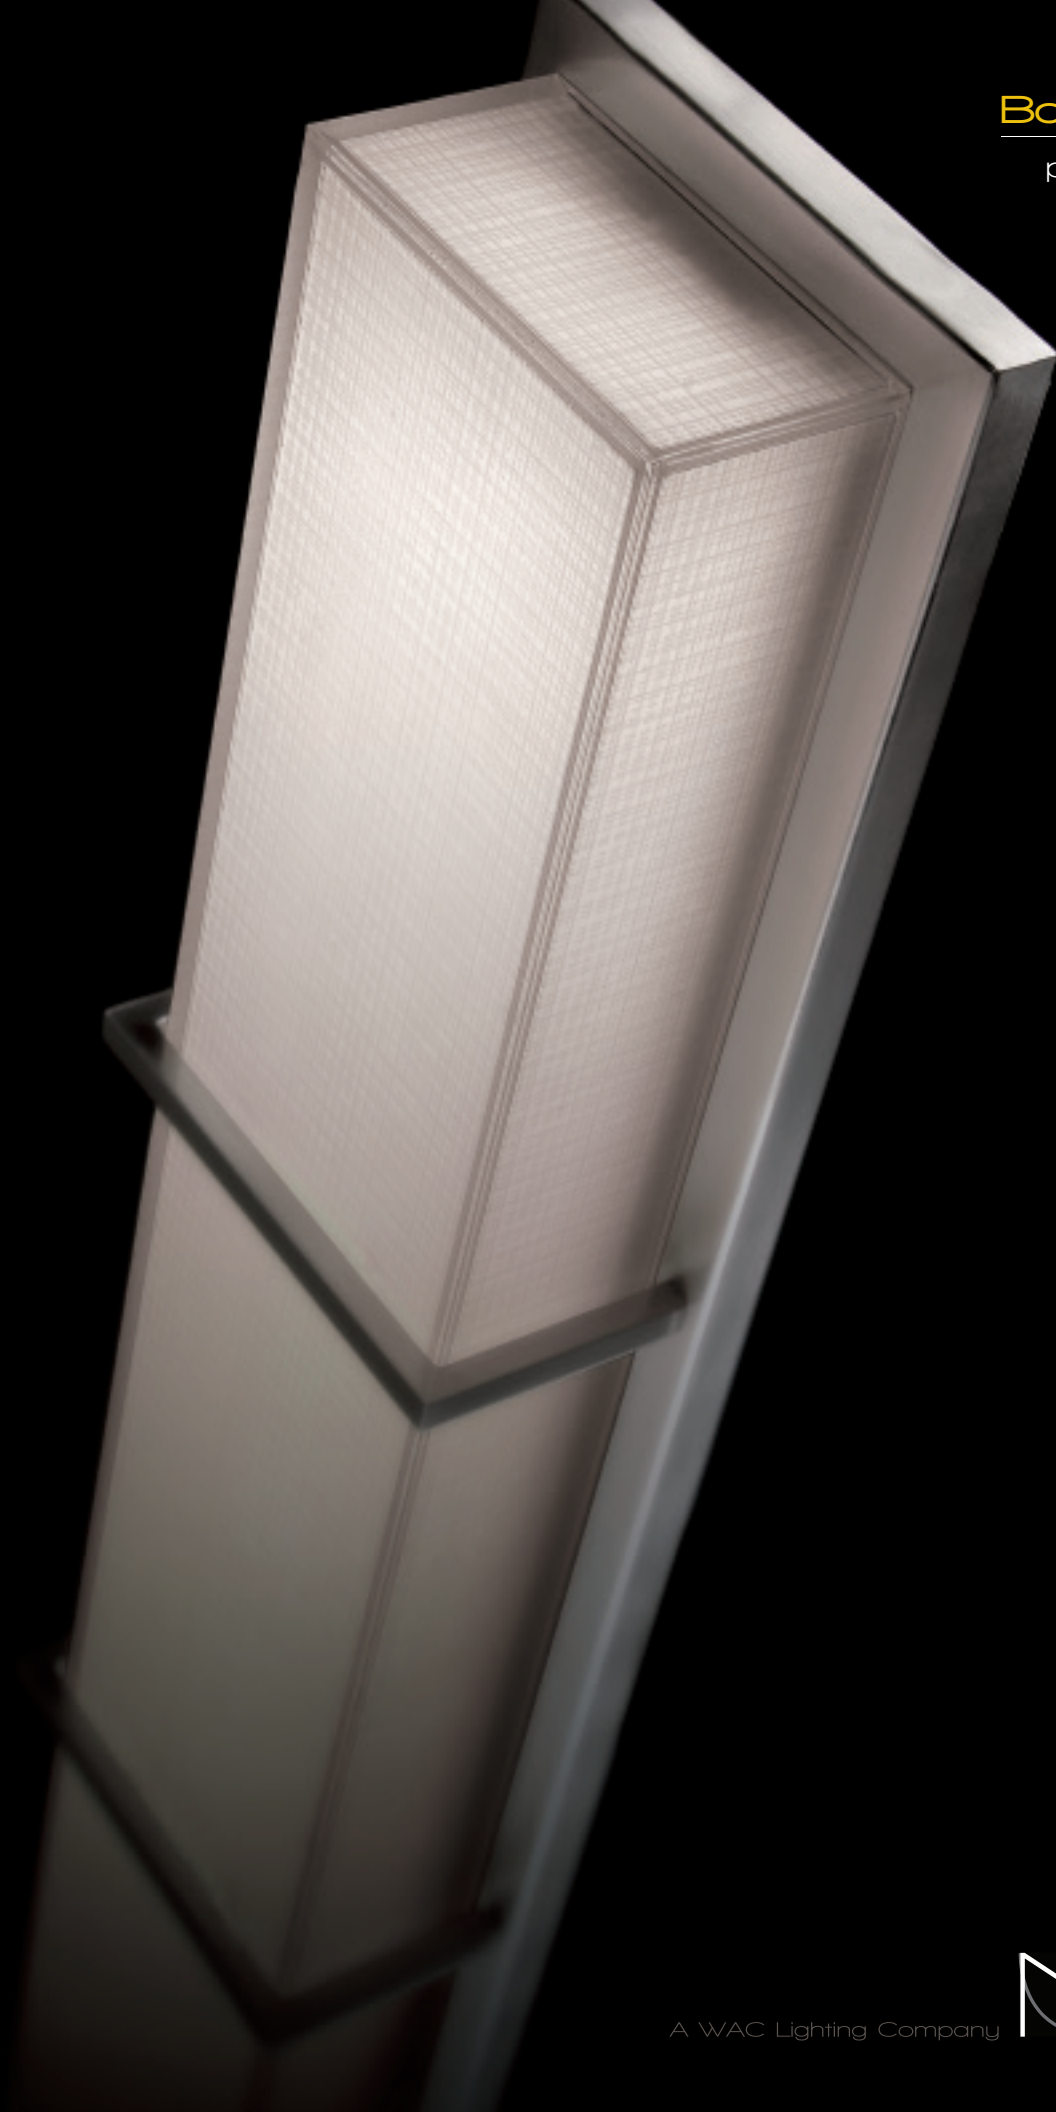

A modern interior space featuring a light grey tufted sofa in the foreground. The background is dominated by a large, dark grey wall with a prominent, wavy, stone-like texture. To the right, a tall, dark, curved wall or partition is visible, featuring a vertical, illuminated, torch-like decorative element. The floor is a light, polished material, and the ceiling has recessed circular lights.

# LED Interior Sconces





# Lumnos


Luminous box of ambient and functional down lighting encapsulating powerful energy efficient LEDs. A crisp, simple style.



- ADA compliant, low profile design
- White mitered glass
- Up & down light
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-92616	15½"	20W	120V-220V-277V	1409	813	SN Satin Nickel

Example: WS-92616-SN








# Avalon


Upscale appeal in mitered ceramic glazed glass and metal framing. This ADA low profile design is graciously sized to proportion well over large wall surfaces and will add distinction and sophistication.



- ADA compliant, low profile design
- White mitered glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-44622	22"	21W	120V-220V-277V	1658	882	SN Satin Nickel 

Example: WS-44622-SN






# Muse


Creative expression of elements. Wood, Metal, Glass, and Technology come together in a beautifully cohesive LED sconce with a tailored wooden spike, polished nickel accents, a mitered linen glass shade and the latest advancements in LED technology. Suited for residential or commercial applications.



- ETL & cETL damp location listed
- CEC Title 24 Compliant
- ADA compliant, low profile design
- Wooden arm and mitered glass
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-12118	18"	19W	120V	1605	1040	PN Polished Nickel 

Example: **WS-12118-PN**



Muse

p.58



A WAC Lighting Company



# Glacier


The beautiful brilliance of frozen ice and polar caps crystalize into stunning wall sconce luminaires as LEDs evoke a sparkle and shimmer with mesmerizing Piastra glass, hand crafted utilizing techniques discovered in the 13th century.



- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-12721	21"	10W	120V	830	175	CH Chrome

Example: WS-12721-CH








# Magic


A magic wand crowned with crystallized art glass illuminated by LEDs from both ends. A slim low profile ADA design perfect for modern vignettes in fine homes and hotels.



- ETL & cETL damp location listed
- ADA compliant, low profile design
- Up and down light
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	# of Lights	Watt	Volt	LED Lumens	Delivered Lumens	Finish
WS-12620	1-light	6W	120V	475	295	PN Polished Nickel 
WS-12622	2-lights	10W	120V	950	435	

Example: WS-12622-PN

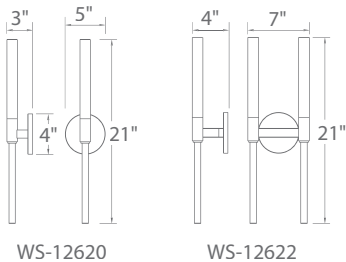





# Elessar

Magically transform a room with dramatic elegance. LEDs are thoughtfully hidden behind the striking polished stainless steel stem to provide dramatic indirect light on the wall behind and spectacularly crowned with solid crystal where the bubbles frozen within project a million sparkles upward.

- ADA compliant, low profile design
- Clear seedy glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

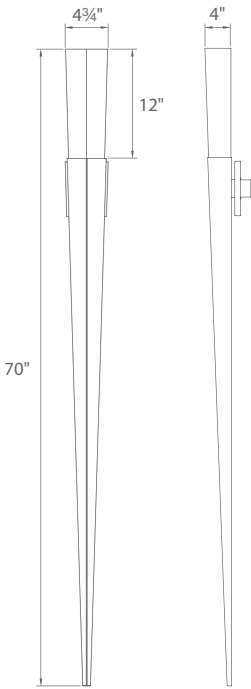

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-66641	70"	42W	120V-220V-277V	2585	1575	PN Polished Nickel 

Example: WS-66641-PN





# Palladian

Tinseltown glamour. Visual drama in an LED light. Designed as a wraparound band finished in gold leaf, silver leaf or polished nickel. The sparkling, seeded crystal spear creates the perfect focal point. Perfect in a home theater or commercial venue with two looks for adaptable scaling and styling.



Gold Leaf



Polished Nickel




Silver Leaf

- ETL & cETL damp location listed
- ADA compliant, low profile design
- Clear seeded crystal
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- Transformer located in outlet box
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-11310</b>	24"	11W	120V	625	320	<b>GL</b> Gold Leaf
						<b>PN</b> Polished Nickel
						<b>SL</b> Silver Leaf

Example: **WS-11310-GL**

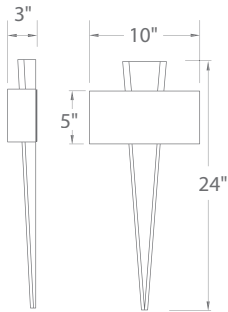



*Shown with optional crystal*

A WAC Lighting Company



# Vermeil

Wrap your room in glamour with this simple, sophisticated sconce. Available in three elegant finishes; gold leaf, silver leaf and polished nickel. Flank a vanity or use as a glimmering jeweled accent to light your way through a dark hallway.

Gold Leaf



Polished Nickel



Silver Leaf




Shade Only: Shown without optional crystal

- ETL & cETL damp location listed
- ADA compliant, low profile design
- Clear seeded crystal (optional)
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- Transformer located in outlet box
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model:	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11311	5"	11W	120V	625	370	GL Gold Leaf PN Polished Nickel SL Silver Leaf

Example: WS-11311-PN







*Shown with optional crystal*

A WAC Lighting Company




# Blaze


A radiating spectacle of warm indirect illumination from hand applied gold leaf. Offered in three proportional sizes to design in multiples on walls or ceilings.

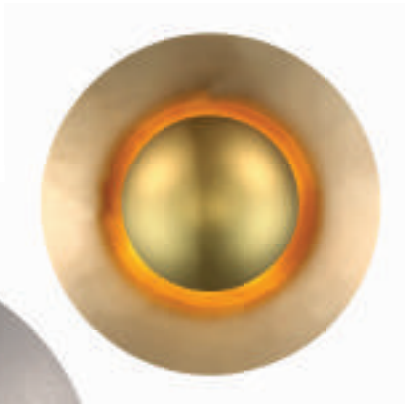

WS-30612

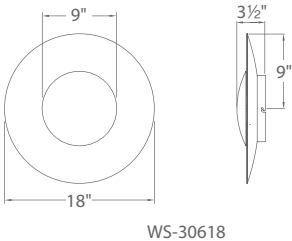

WS-30618

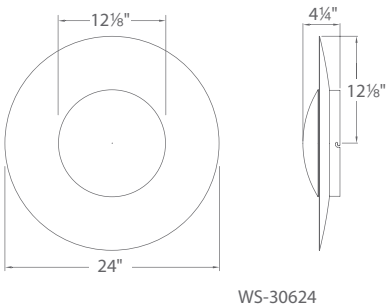


WS-30624

- Place on wall as sconce or flush mounts to ceiling
- ADA compliant, low profile design available in 12" and 18" sizes
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-30612	12"	10.5W	120V-220V-277V	787	250	<b>GL</b> Gold Leaf/Gold Plated <b>SL</b> Silver Leaf/Polished Nickel
WS-30618	18"	25W		1979	605	
WS-30624	24"	31W		2392	700	

Example: WS-30612-GL



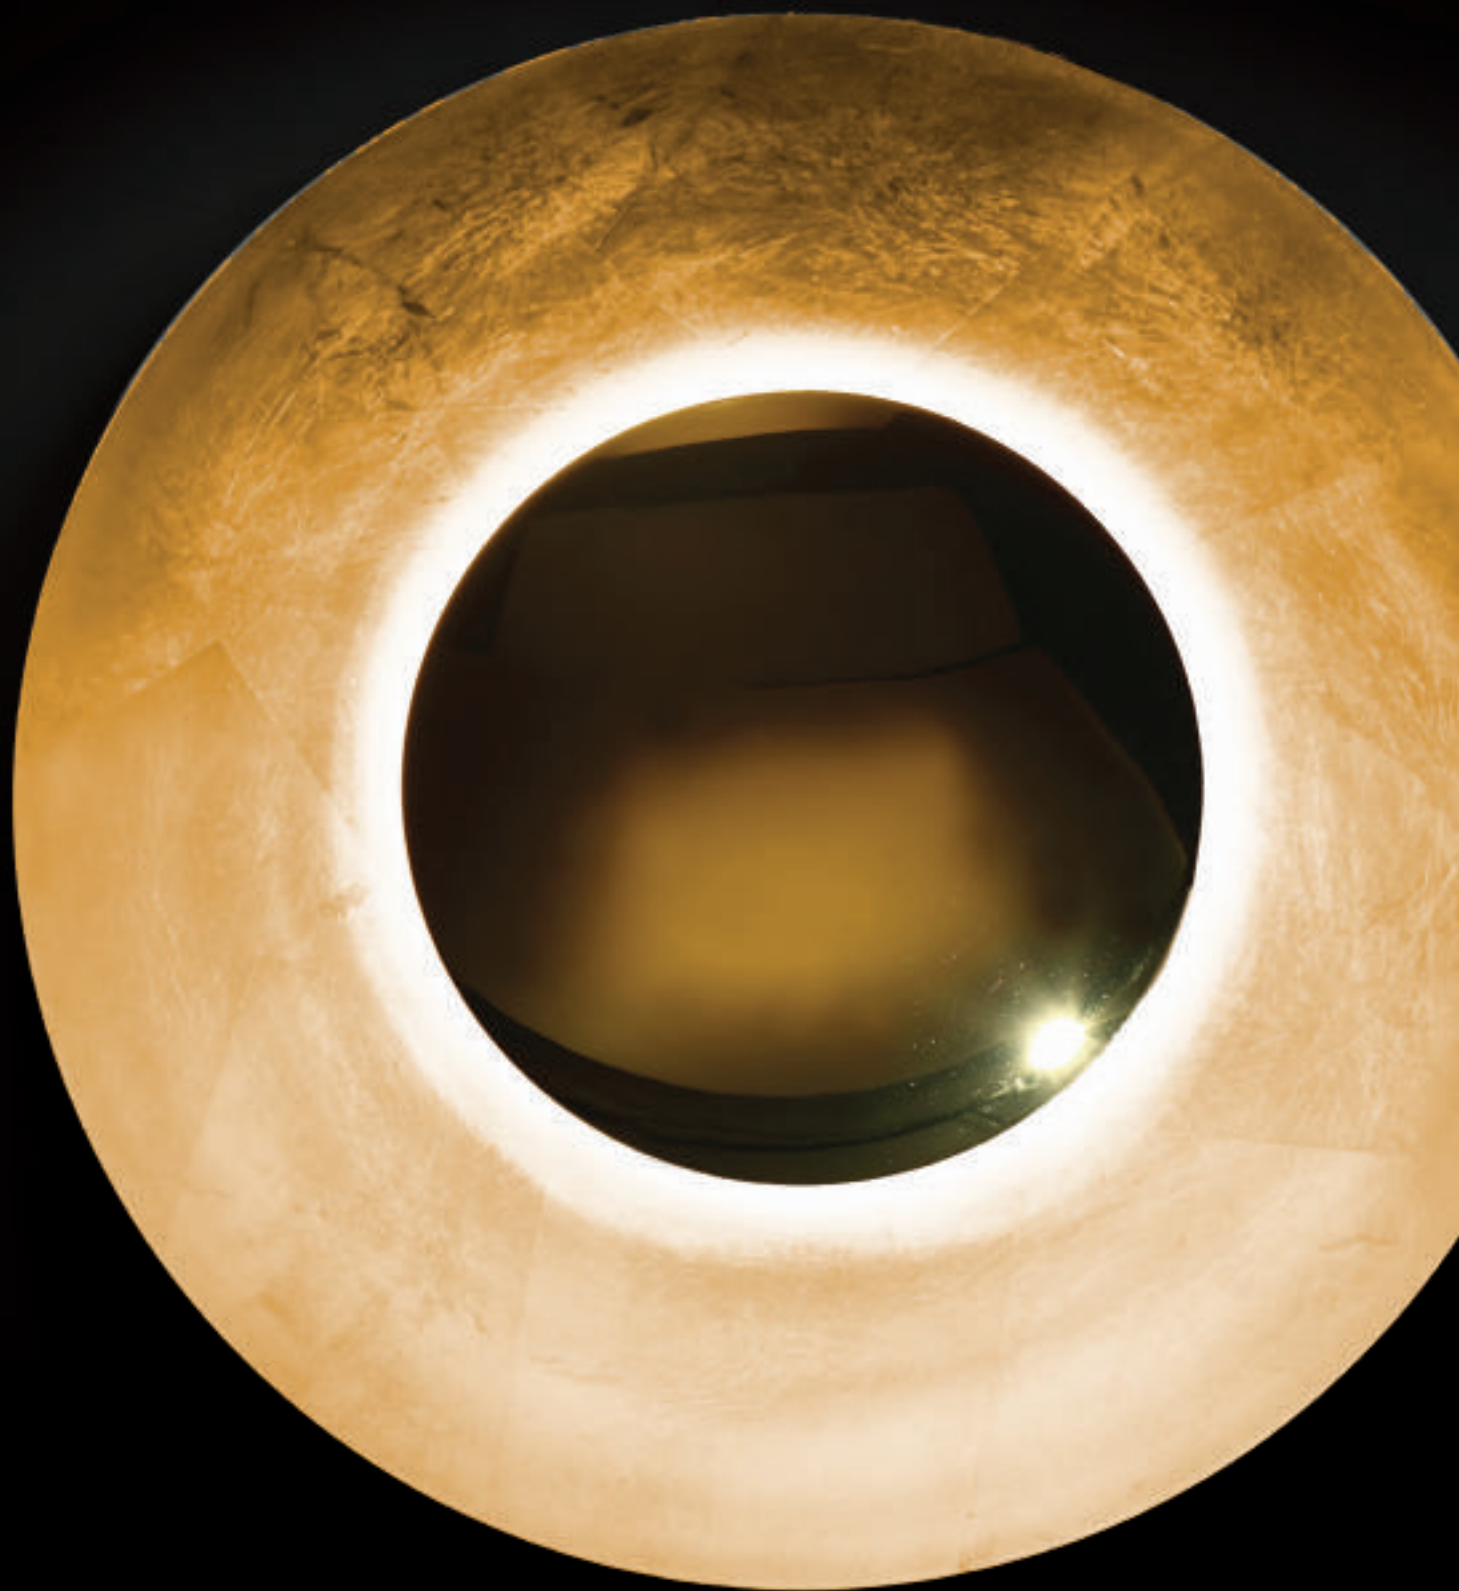


# Quatrain


Four contoured square elements are aligned for a unique design that is modular both for use as individual sconces and interconnected in multiples for a dramatic pixilated effect in a custom configuration.



- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-98608	8"	31W	120V-220V-277V	1635	224	SN <i>Satin Nickel</i> 

Example: **WS-98608-SN**




Quatrain

p.72

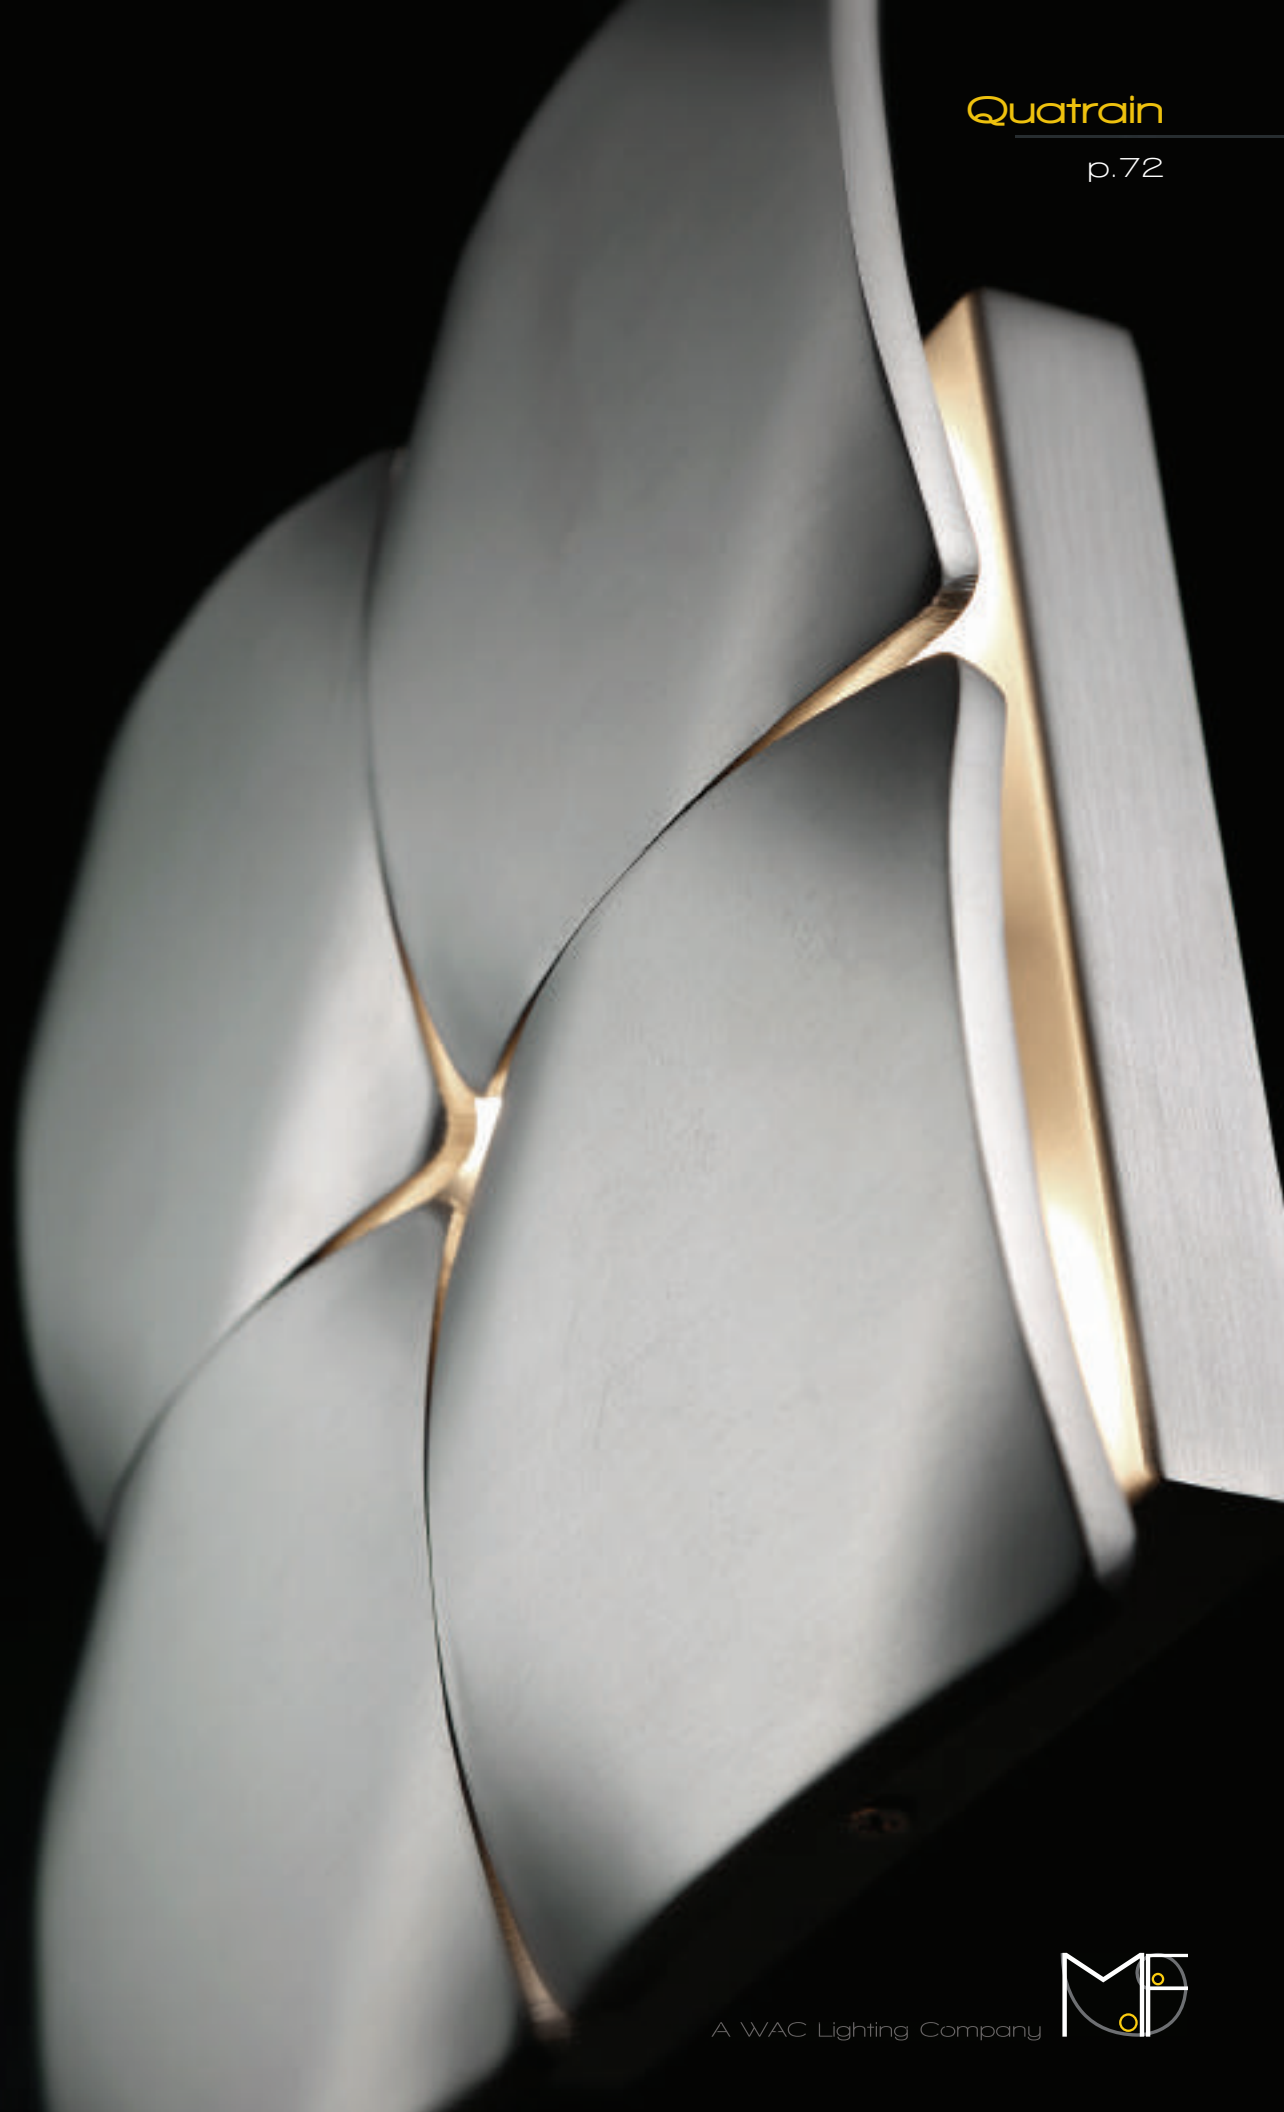

# Abstract

Factions of geometric shapes combine in this modern art sconce. LEDs are hidden within the folded layers to permit the light to playfully escape through the interplay of reflectance.

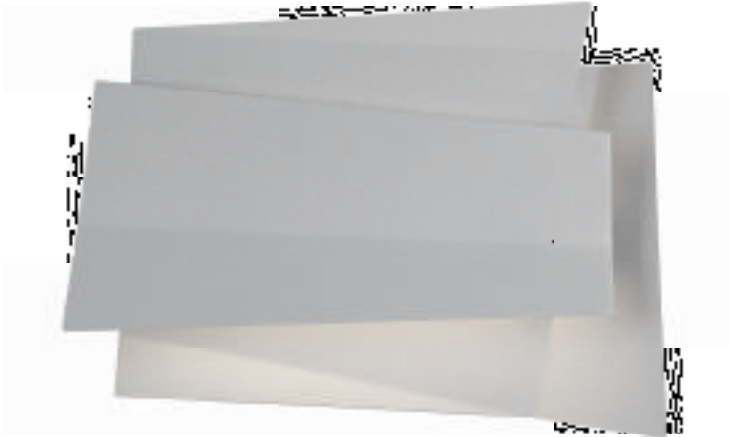

Titanium




White


- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Up & down light
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-28616</b>	16"	30.5W	120V-220V-277V	2304	788	<b>TT</b> Titanium <b>WT</b> White

Example: **WS-28616-TT**

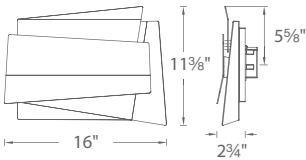



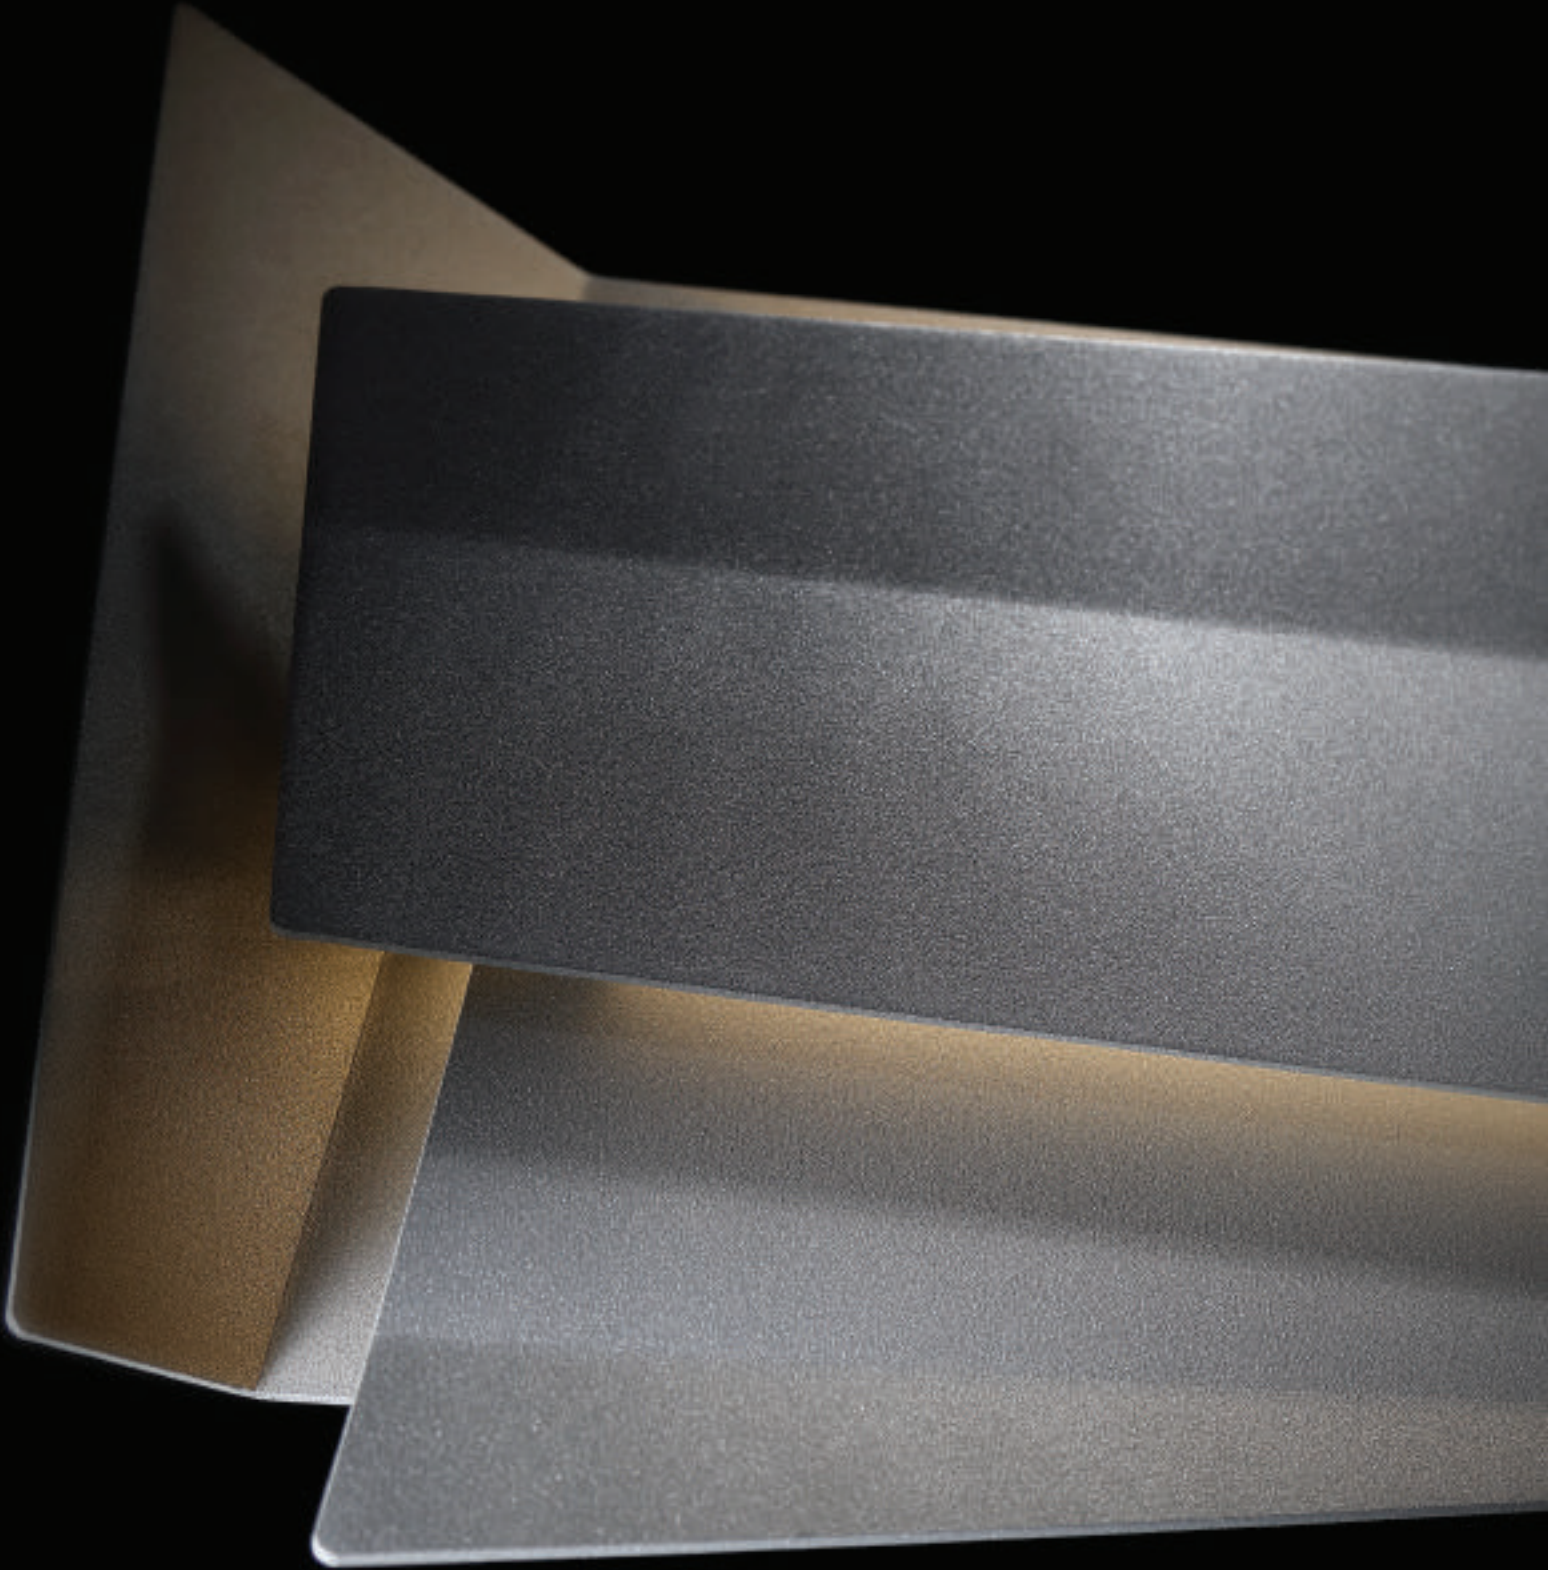




# Escher

Enigmatic spatial representation of a continuum.  
Different vantage points offer differing dramatic views of the entangled metal bands.



Titanium

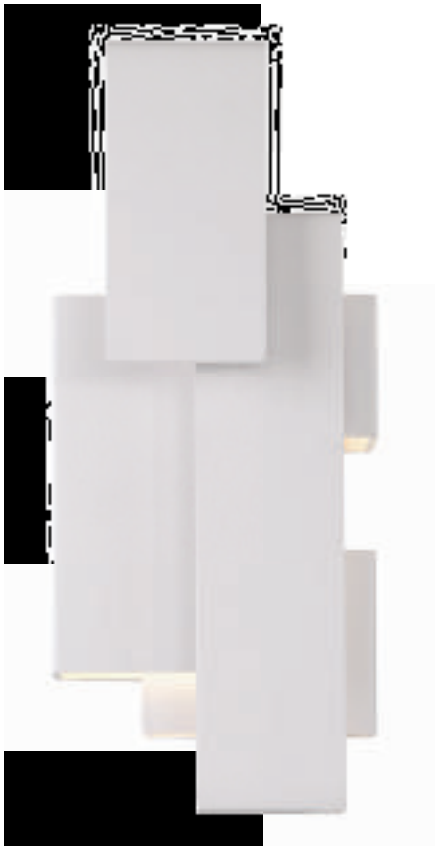


White

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-95614</b>	14"	11W	120V-220V-277V	790	130	<b>TT</b> <i>Titanium</i> <b>WT</b> <i>White</i>

Example: **WS-95614-TT**

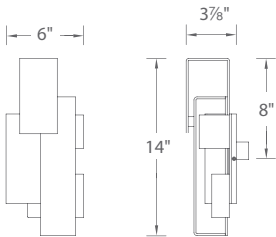




# Chill

Sparkles emit playfully from light bouncing off bubbles frozen in solid crystal. Powerful LED light sources hidden within a polished nickel frame illuminate upwards and downwards.


May be an upscale lobby sconce, a theater room sconce, or luxury bath sconce.

- ADA compliant, low profile design
- Clear seedy crystal
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 35,000 hour rated life
- Color Temp: 3000K
- CRI: 90



Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-31618	18"	20W	120V-220V-277V	1433	722	PN Polished Nickel 

Example: WS-31618-PN









# Abyss

Edgy without all the edges. An LED light is cleverly hidden between alternating layers of brushed and polished nickel. The Abyss is a soft modern wall sconce with inspiring appeal in luxury residences or hospitality commercial applications.

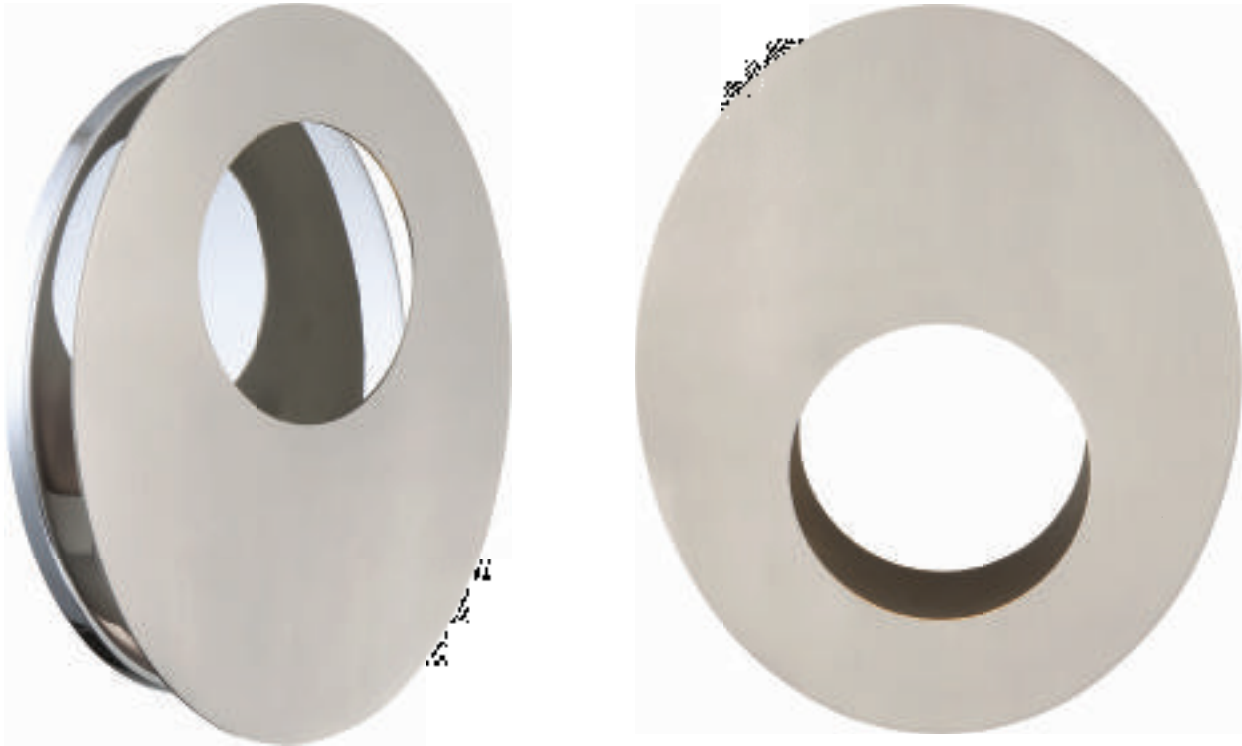

- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Luminaire may be rotated 180° when mounting
- Up & down light
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-22611	11"	11.5W	120V-220V-277V	736	320	SN Satin Nickel/Chrome



Example: **WS-22611-SN**



Abyss

p.80




A WAC Lighting Company

# Rush


Sensuous ripples dance with delight on this interior wall sconce.  
Generous uplight and downlight provide ambiance for a more intimate setting.



- Up & down light
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- Conversion plate for 4" J box included
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-83607	7"	18.5W	120V	1600	987	PN Polished Nickel 

Example: **WS-83607-PN**

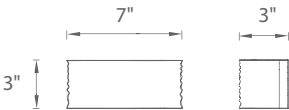




# Reflectance


A versatile design with a calming appeal mounted in either orientation, as an orb reflected on the horizon, or as a balanced division of a whole.



- Mount vertically or horizontally
- ADA compliant, low profile design
- CEC Title 24 Compliant
- Ceramic glazed super white borosilicate glass shade
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3500K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-29621</b>	18"	30W	120V-220V-277V	2508	743	<b>SN</b> <i>Satin Nickel</i> 

Example: **WS-29621-SN**

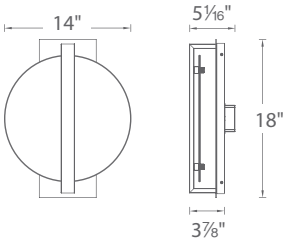





# Osso


Watch out for the sharpness of this design as cutting edge technology meets precisely sliced metal and glass. A ribbed brushed aluminum bracket symmetrically embraces a mitered block of glass.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Ceramic glazed super white mitered glass
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-78609	9"	10W	120V-220V-277V	810	500	AL Brushed Aluminum

Example: WS-78609-AL

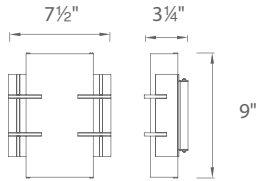

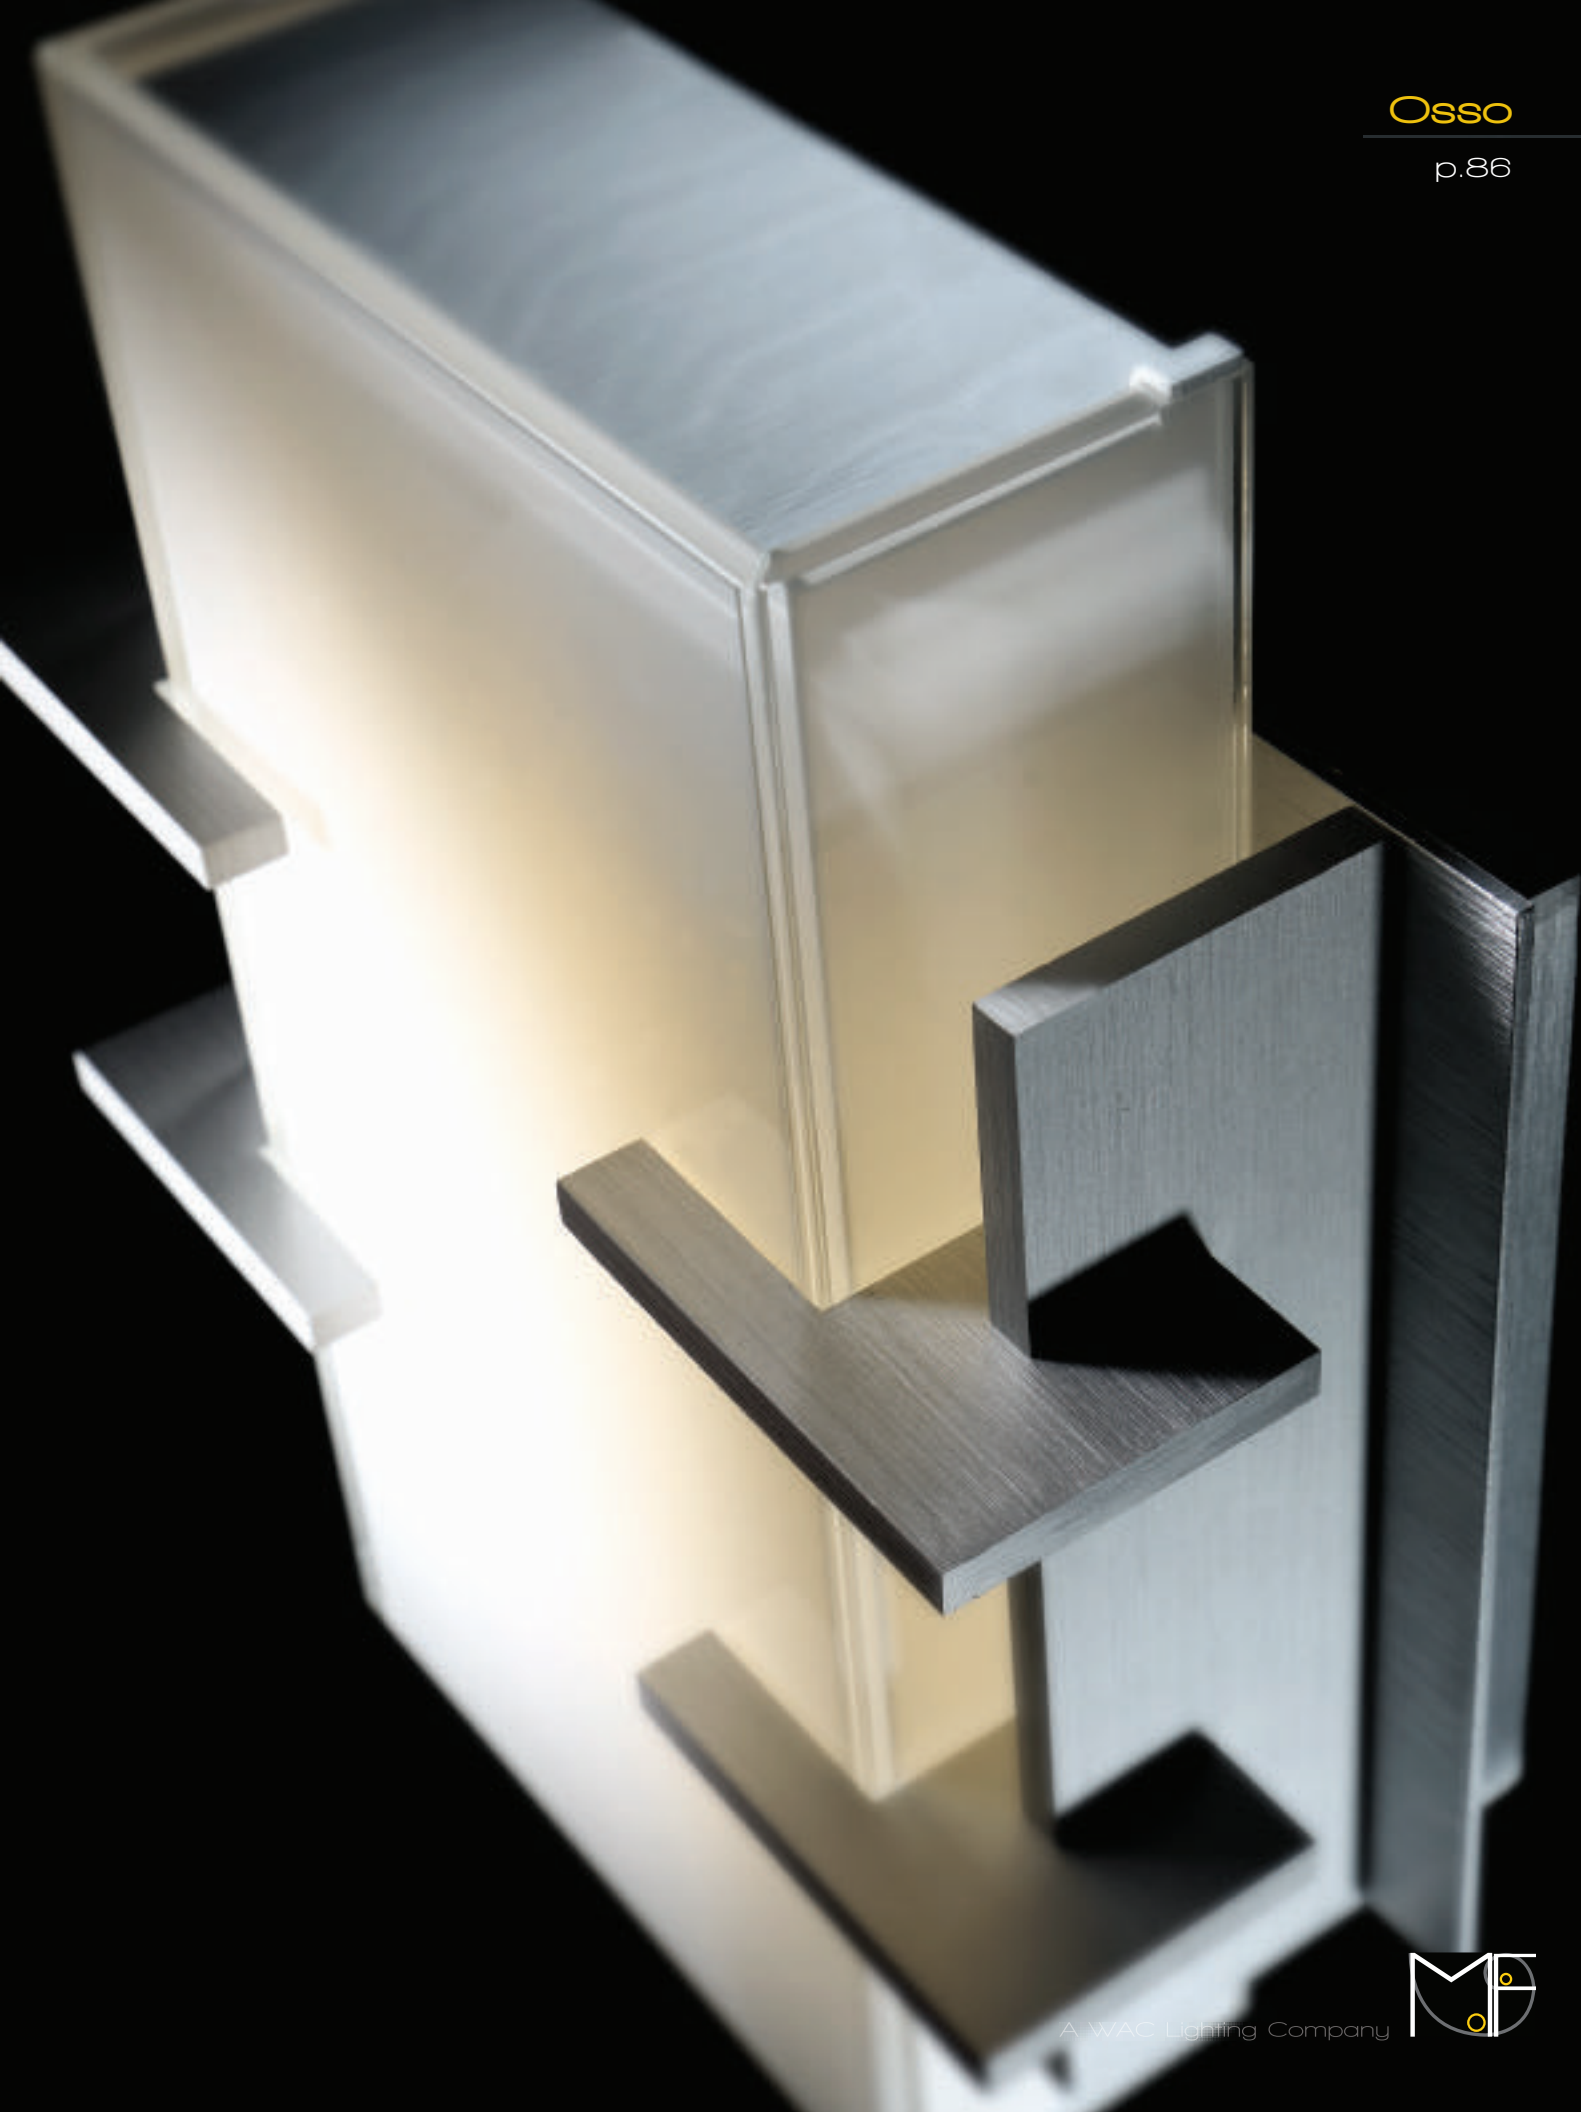


# Virtue

Classically dimensional and timeless, Virtue is always in fashion. An intriguing facade representing intersecting structural planes of metal and glass inspired by architectural glass curtain wall design. Proportional scaling as a pleasing horizontal or vertical sconce further enhances design versatility.




- Mount vertically or horizontally
- ADA compliant, low profile design
- White mitered glass
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-86615	15"	20.5W	120V-220V-277V	1490	455	AL Brushed Aluminum

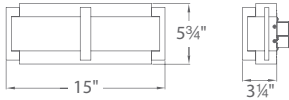

Example: WS-86615-AL

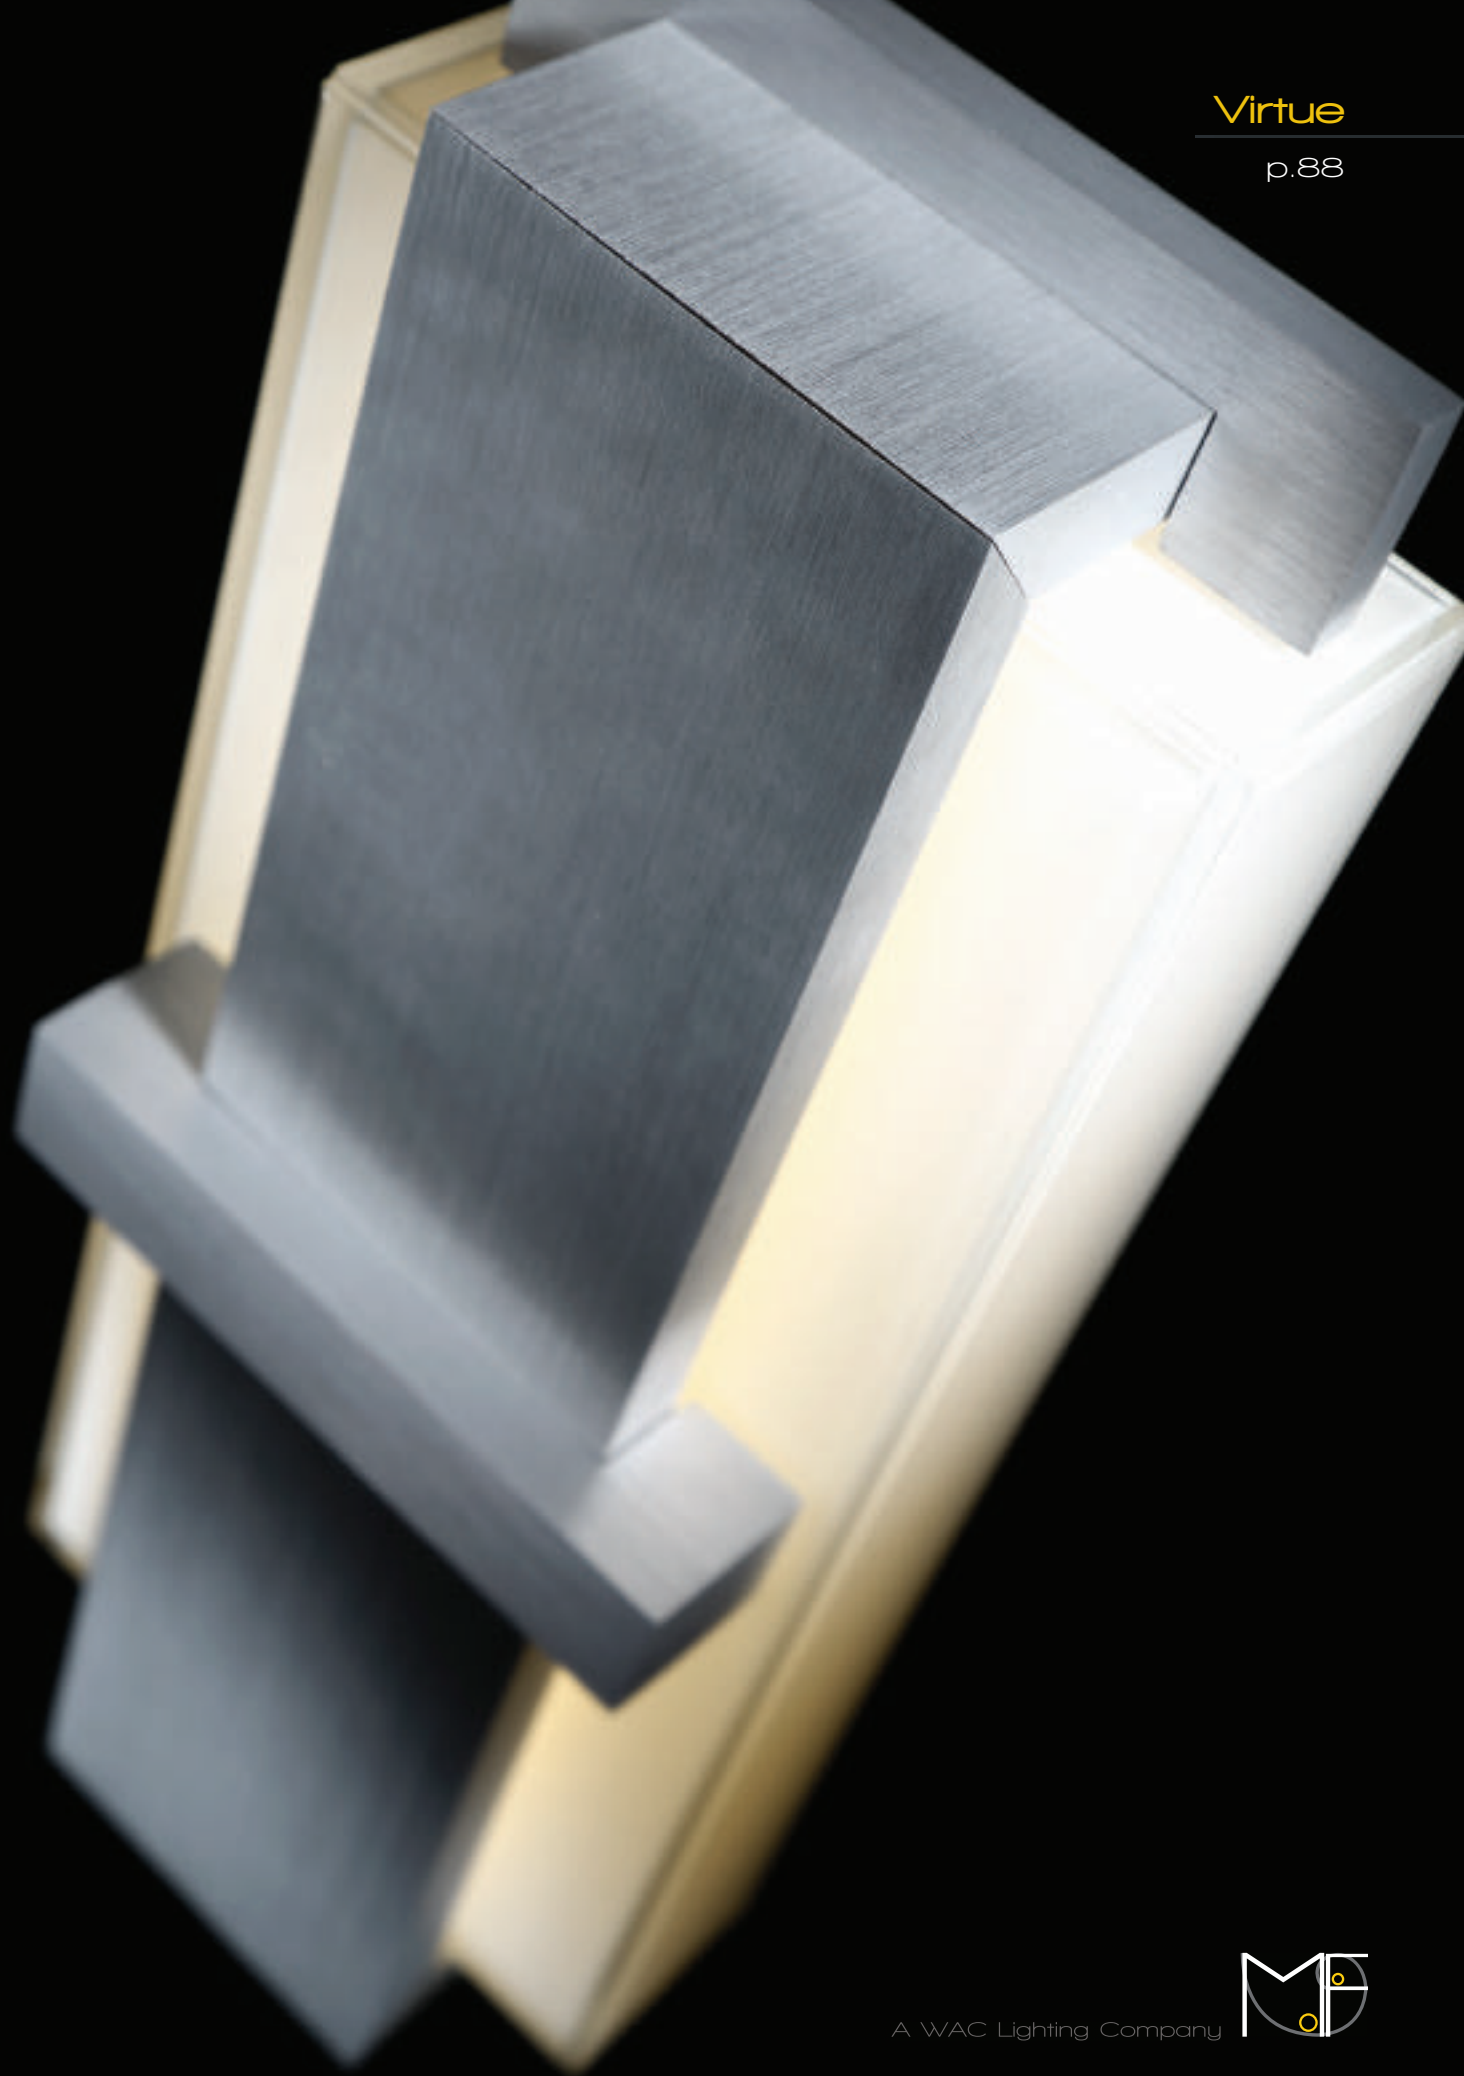

# I beam

LEDs are set at an angle to illuminate the wall surrounding the sconce while minimizing glare seen from the side. An exceptional option for illuminating corridors or stairwells where it may be challenging to find an ADA sconce that looks attractive from multiple viewing angles.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Aluminum construction with acrylic diffuser
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90



Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-94614	14"	20.5W	120V-220V-277V	960	660	AL Brushed Aluminum

Example: WS-94614-AL








# Studio


A cantilevered LED wall structure. Warm upward ambient lighting from a compact form. Perfect for an architect's studio.



- Damp location listed
- ADA compliant, low profile design
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 277V option available special order
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11606	9"	10W	120V	830	635	AL Brushed Aluminum 


Example: **WS-11606-AL**






# Nia


The minimalist curves of this extrusion are boldly featured in a form meets function design. Powerful LEDs provide up and down illumination for a versatile and durable luminaire ideal for upscale public spaces in multifamily high-rise corridors and stairwells.

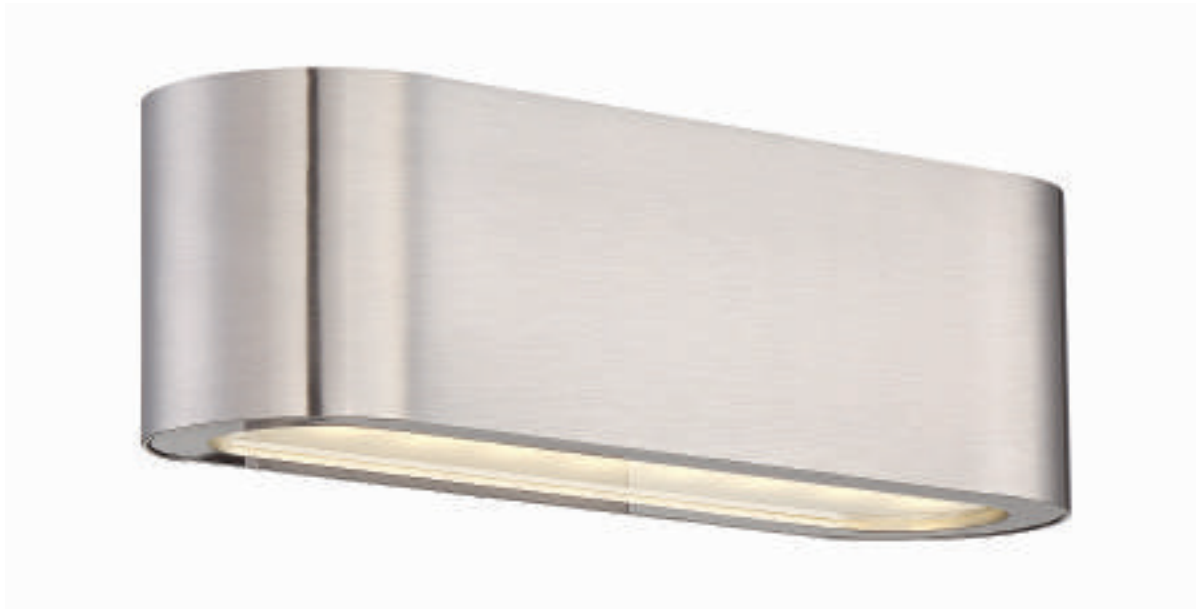

- ADA compliant, low profile design
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Up & down light
- Full range dimming when used with compatible dimmers\*
- Conversion plate for 4" J box included
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 85,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-39610	10"	16W	120V-220V-277V	1159	773	BN Brushed Nickel 

Example: WS-39610-BN

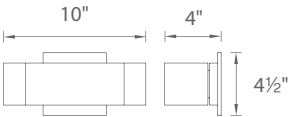








# Rhythm


Visualized sound. Feel the pulse of light and shade in the step detail within the organic ring form indirectly illuminated with a concealed LED. Hand crafted using a centuries old sculpturing lost wax casting technique called cire perdue. Paired with state-of-the-art LED technology, this sconce is a celebration of design advancement.



- CEC Title 24 Compliant
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-11109</b>	9"	12W	120V	915	415	<b>WT</b> White 

Example: **WS-11109-WT**

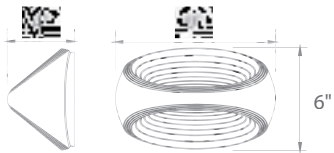




# Secret

Like a slight wrinkle, the Secret wall sconce is a peek through of light designed to blend into wall surfaces. Available in two finishes including a white to easily paint over to accommodate your wall coloring. Use for functional down lighting or uplighting for walkways and accent illumination.




White

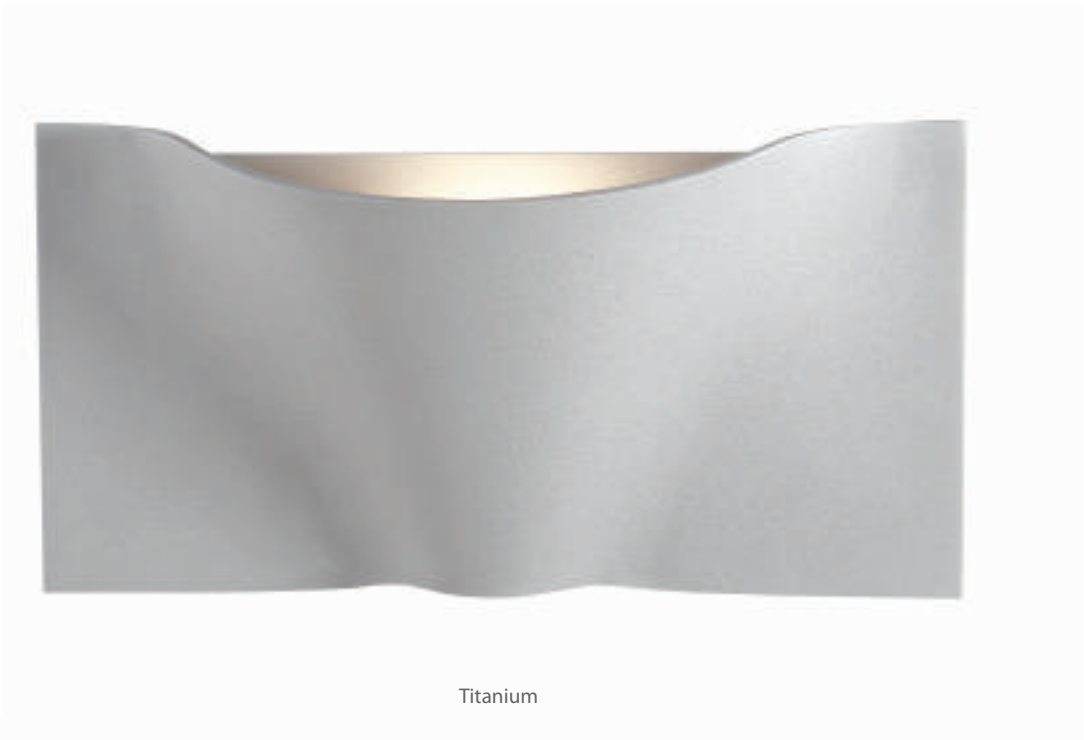


Titanium

- Luminaire may be rotated 180° when mounting
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 65,000 hour rated life
- Color Temp: 3000K
- CRI: 90

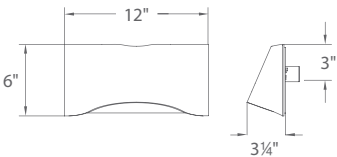

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-89612</b>	12"	17W	120V-220V-277V	948	820	<b>TT</b> Titanium <b>WT</b> White

Example: **WS-89612-TT**

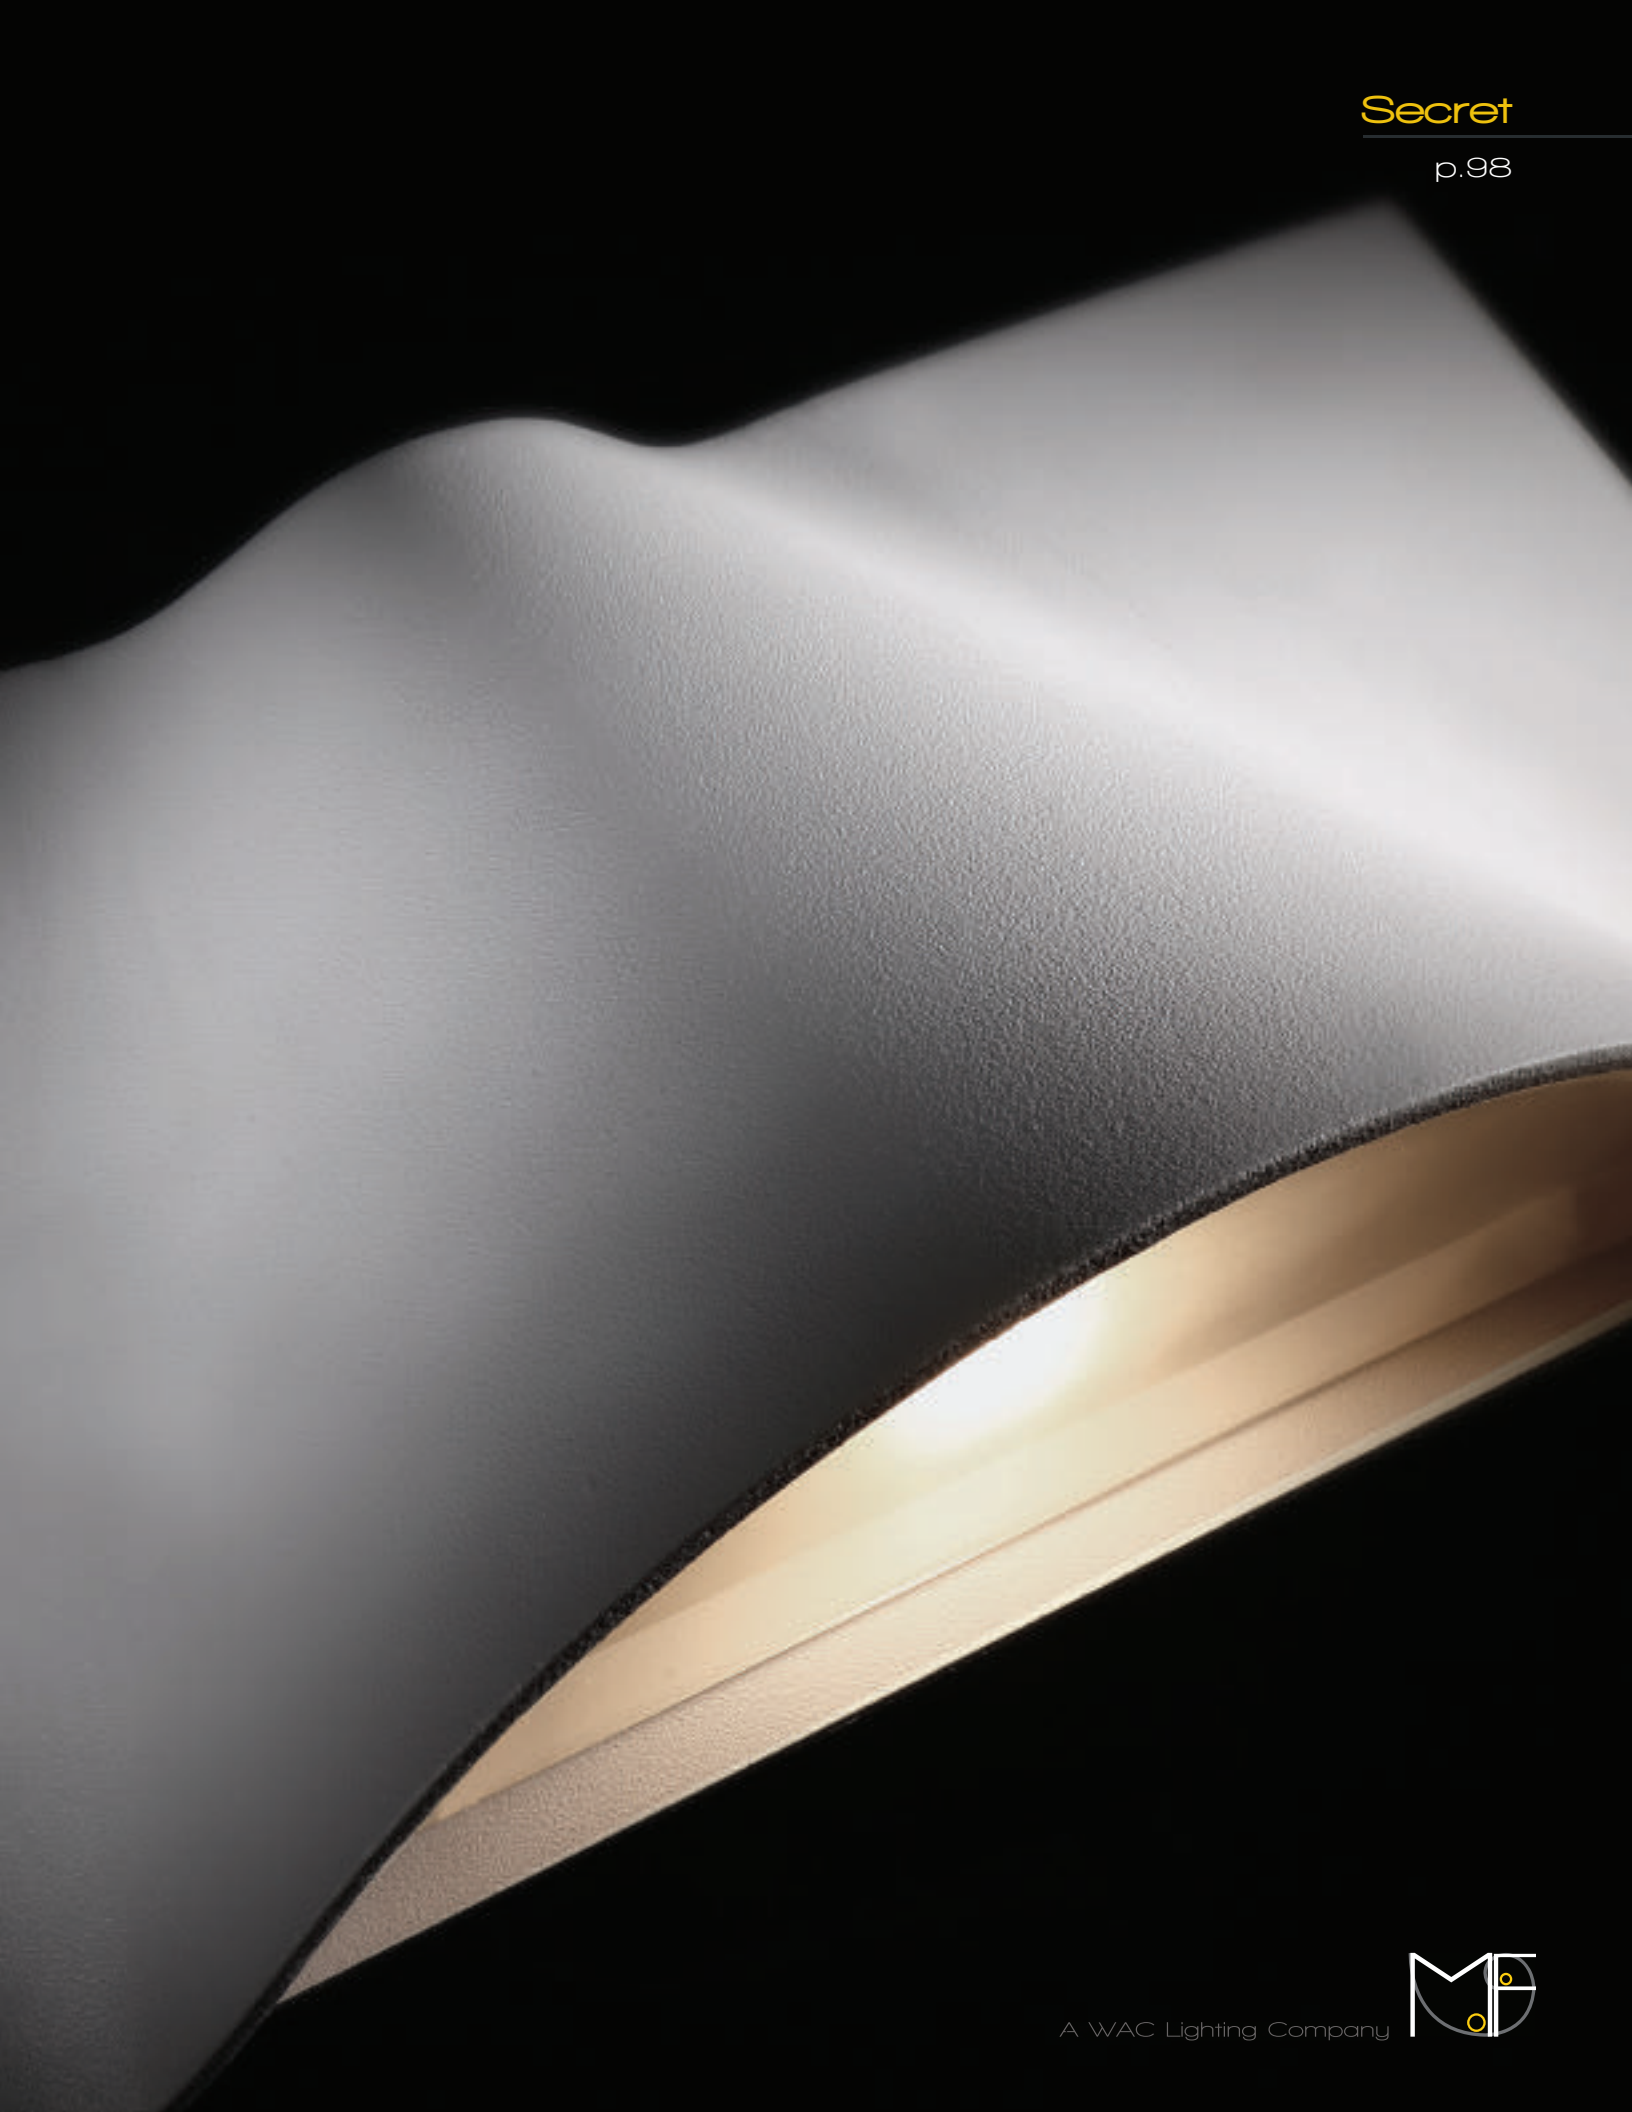

# Fold


A cleverly concealed integrated LED ambient up light make this sconce an enigma when viewed front and side in this refreshing departure from the conventional pocket sconce design. Suitable for both residential and commercial requirements.



- ADA compliant, low profile design
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-96609	9"	15.5W	120V-220V-277V	713	697	WT White

Example: WS-96609-WT







# Slide

An austere form arcing up off the wall proffering illumination in both directions. Simply beautiful.




Brushed Aluminum




White

- Luminaire may be rotated 180° when mounting
- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Up & down light
- Full range dimming when used with compatible dimmers\*
- Driver located inside the fixture
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-27610	10"	21.5W	120V-220V-277V	1409	1124	AL WT Brushed Aluminum White



Example: WS-27610-AL

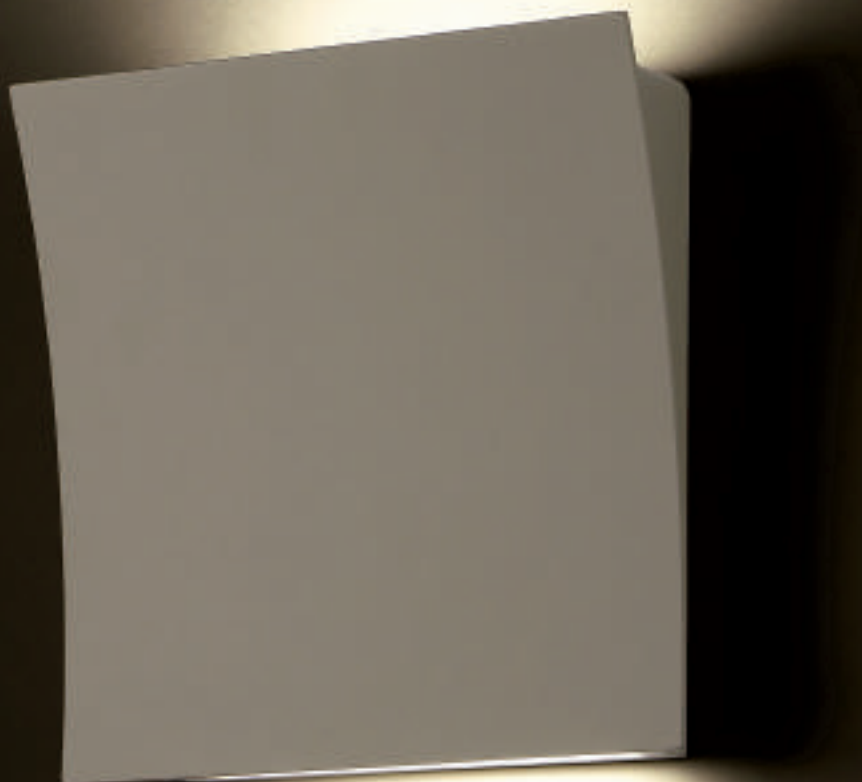

# Blade

A new slant on modern lighting. This low profile angular sconce deploys robust indirect illumination of walls and surfaces in two sizes for various applications. The subtle graduated design offers a unique look and high style appeal.

- ADA compliant, low profile design
- CEC Title 24 Compliant
- Damp location listed
- Mounts only on a 2" x 4" vertical switch box
- Conversion plate for 4" J box included
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90




White



Brushed Aluminum

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-11511	11"	9.5W	120V	808	660	AL Brushed Aluminum
WS-11522	22"	18.5W	120V	1332	1150	WT White

Example: WS-11522-AL

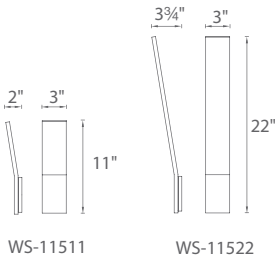





# Aries

Slender and graceful like a flame, this sculpted sconce is designed to conceal warm LED lighting indirectly illuminating walls and surfaces behind. Tapered curves are available in custom colored finishes and mysteriously illuminate as does the miracle of fire.



Ebony Black



Ferrari Red



Pearl White




Titanium

- ETL & cETL damp location listed
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-11218</b>	18"	8W	120V	625	275	<div><div><b>EB</b> Ebony Black</div><div><b>FR</b> Ferrari Red</div><div><b>PW</b> Pearl White</div><div><b>TT</b> Titanium</div></div>

Example: **WS-11218-TT**






# Asgard


Rectilinear shade of engineered walnut wood for a naturalistic option in a simple modern form. Illuminates beautifully up and down, imparting warm ambient light. Silk screened glass shield glare from any viewing angle to allow for specification in stairwells and open atriums.



- Walnut wood
- Emergency battery back up option special order
- ADA compliant, low profile design
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Up & down light
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-97614	14"	30.5W	120V-220V-277V	2077	1127	WAL Walnut 

Example: **WS-97614-WAL**  
For emergency battery, add **-EM** after the finish: **WS-97614-WAL-EM**

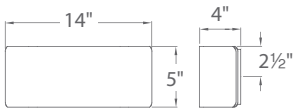







LED

Interior & Exterior Sconces







# Framed

An eminent contemporary architectural design, sleek lines embrace mitered glass. This bold ADA compliant structure accentuates wall height for a dramatic impression throughout the space. See pages 113-114 for complementary interior and exterior sconces

- ADA compliant, low profile design
- ETL & cETL damp location listed
- White mitered glass
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

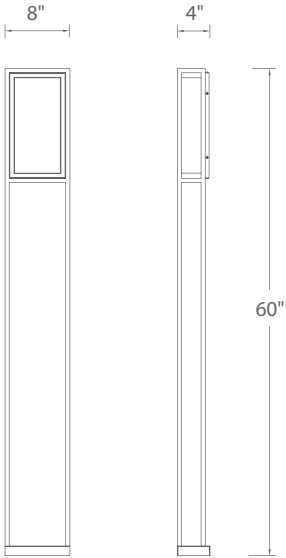

Model	Height	Wattage	Voltage	LED Lumens (Up)	LED Lumens (Down)	Delivered Lumens (Up)	Delivered Lumens (Down)	Finish
WS-73660	60"	21W	120V-220V-277V	1044	375	644	305	BZ Bronze 

Example: WS-73660-BZ



# Framed

Redefine being framed. This cleanly framed out simple block of light is available in two finishes and three sizes. See pages 111-112 for complementary statement piece with exaggerated proportions which is also available to provide cohesive specification options.



Bronze



Graphite






- Can be mounted as a wall sconce or ceiling flush mount
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with white mitered glass
- Replaceable LED module
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W73608	8"	15W	120V	1219	776	<b>GH</b> Graphite <b>BZ</b> Bronze
WS-W73614	14"	25W		2378	1183	
WS-W73620	20"	38W		3058	1864	

Example: **WS-W73608-GH**

For 277V special order, add an "F" before the finish: **WS-W73608F-GH**

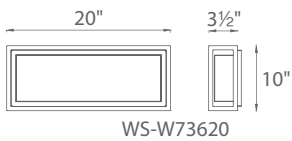







# Ledge

A luminous architectural profile and superior construction make this ceiling flush mount or wall sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Allows for cohesive specifications across residential and commercial interior and exterior applications. Also available as a wall luminaire in various lengths. See pages 33, 35 and 217 for other available finishes and sizes for both interior and exterior applications.



Bronze



Graphite





Black




Brushed Aluminum

- WS-W1414 & WS-W1420 are CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Aluminum construction with white mitered glass
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- 277V option available for WS-W1408, W1414, W1420 *special order*
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

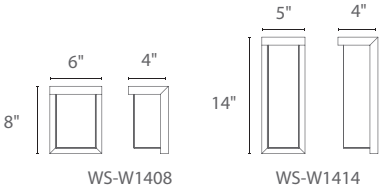

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1408	8"	11.5W	120V	525	340	AL Brushed Aluminum
WS-W1414	14"	19.5W		910	670	BK Black
WS-W1420	20"	29W		1575	1050	BZ Bronze
WS-W1412	12"	29W		1200	690	GH Graphite

Example: **WS-W1420-AL**  
For 277V special order, add an "F" before the finish: **WS-W1420F-AL**

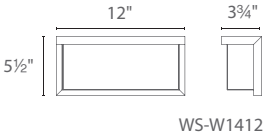



# Intersect


Intersecting lines and framed glass backlit with optimal LED illumination. Adapts to be mounted both horizontally and vertically in either orientation. A clean design appropriate for both commercial and residential environments as an interior or exterior wall mount fixture.



- Mount vertically or horizontally
- CEC Title 24 Compliant
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction screened white glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W75618</b>	18"	19W	120V	1609	443	<b>AL</b> Brushed Aluminum <b>BZ</b> Bronze

Example: **WS-W75618-AL**  
For 277V special order, add an "F" before the finish: **WS-W75618F-AL**






# Irony


Capture the moon. An ironic sculpture and piece of functional wall art. Irony is both original and whimsically fitting in both transitional and eclectic settings.

- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with pressed etched opal glass
- Luminaire within the frame
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90



Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W37622	22"	15W	120V	993	528	BZ Bronze 


Example: WS-W37622-GH

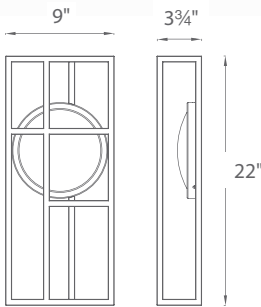



Irony

p.120

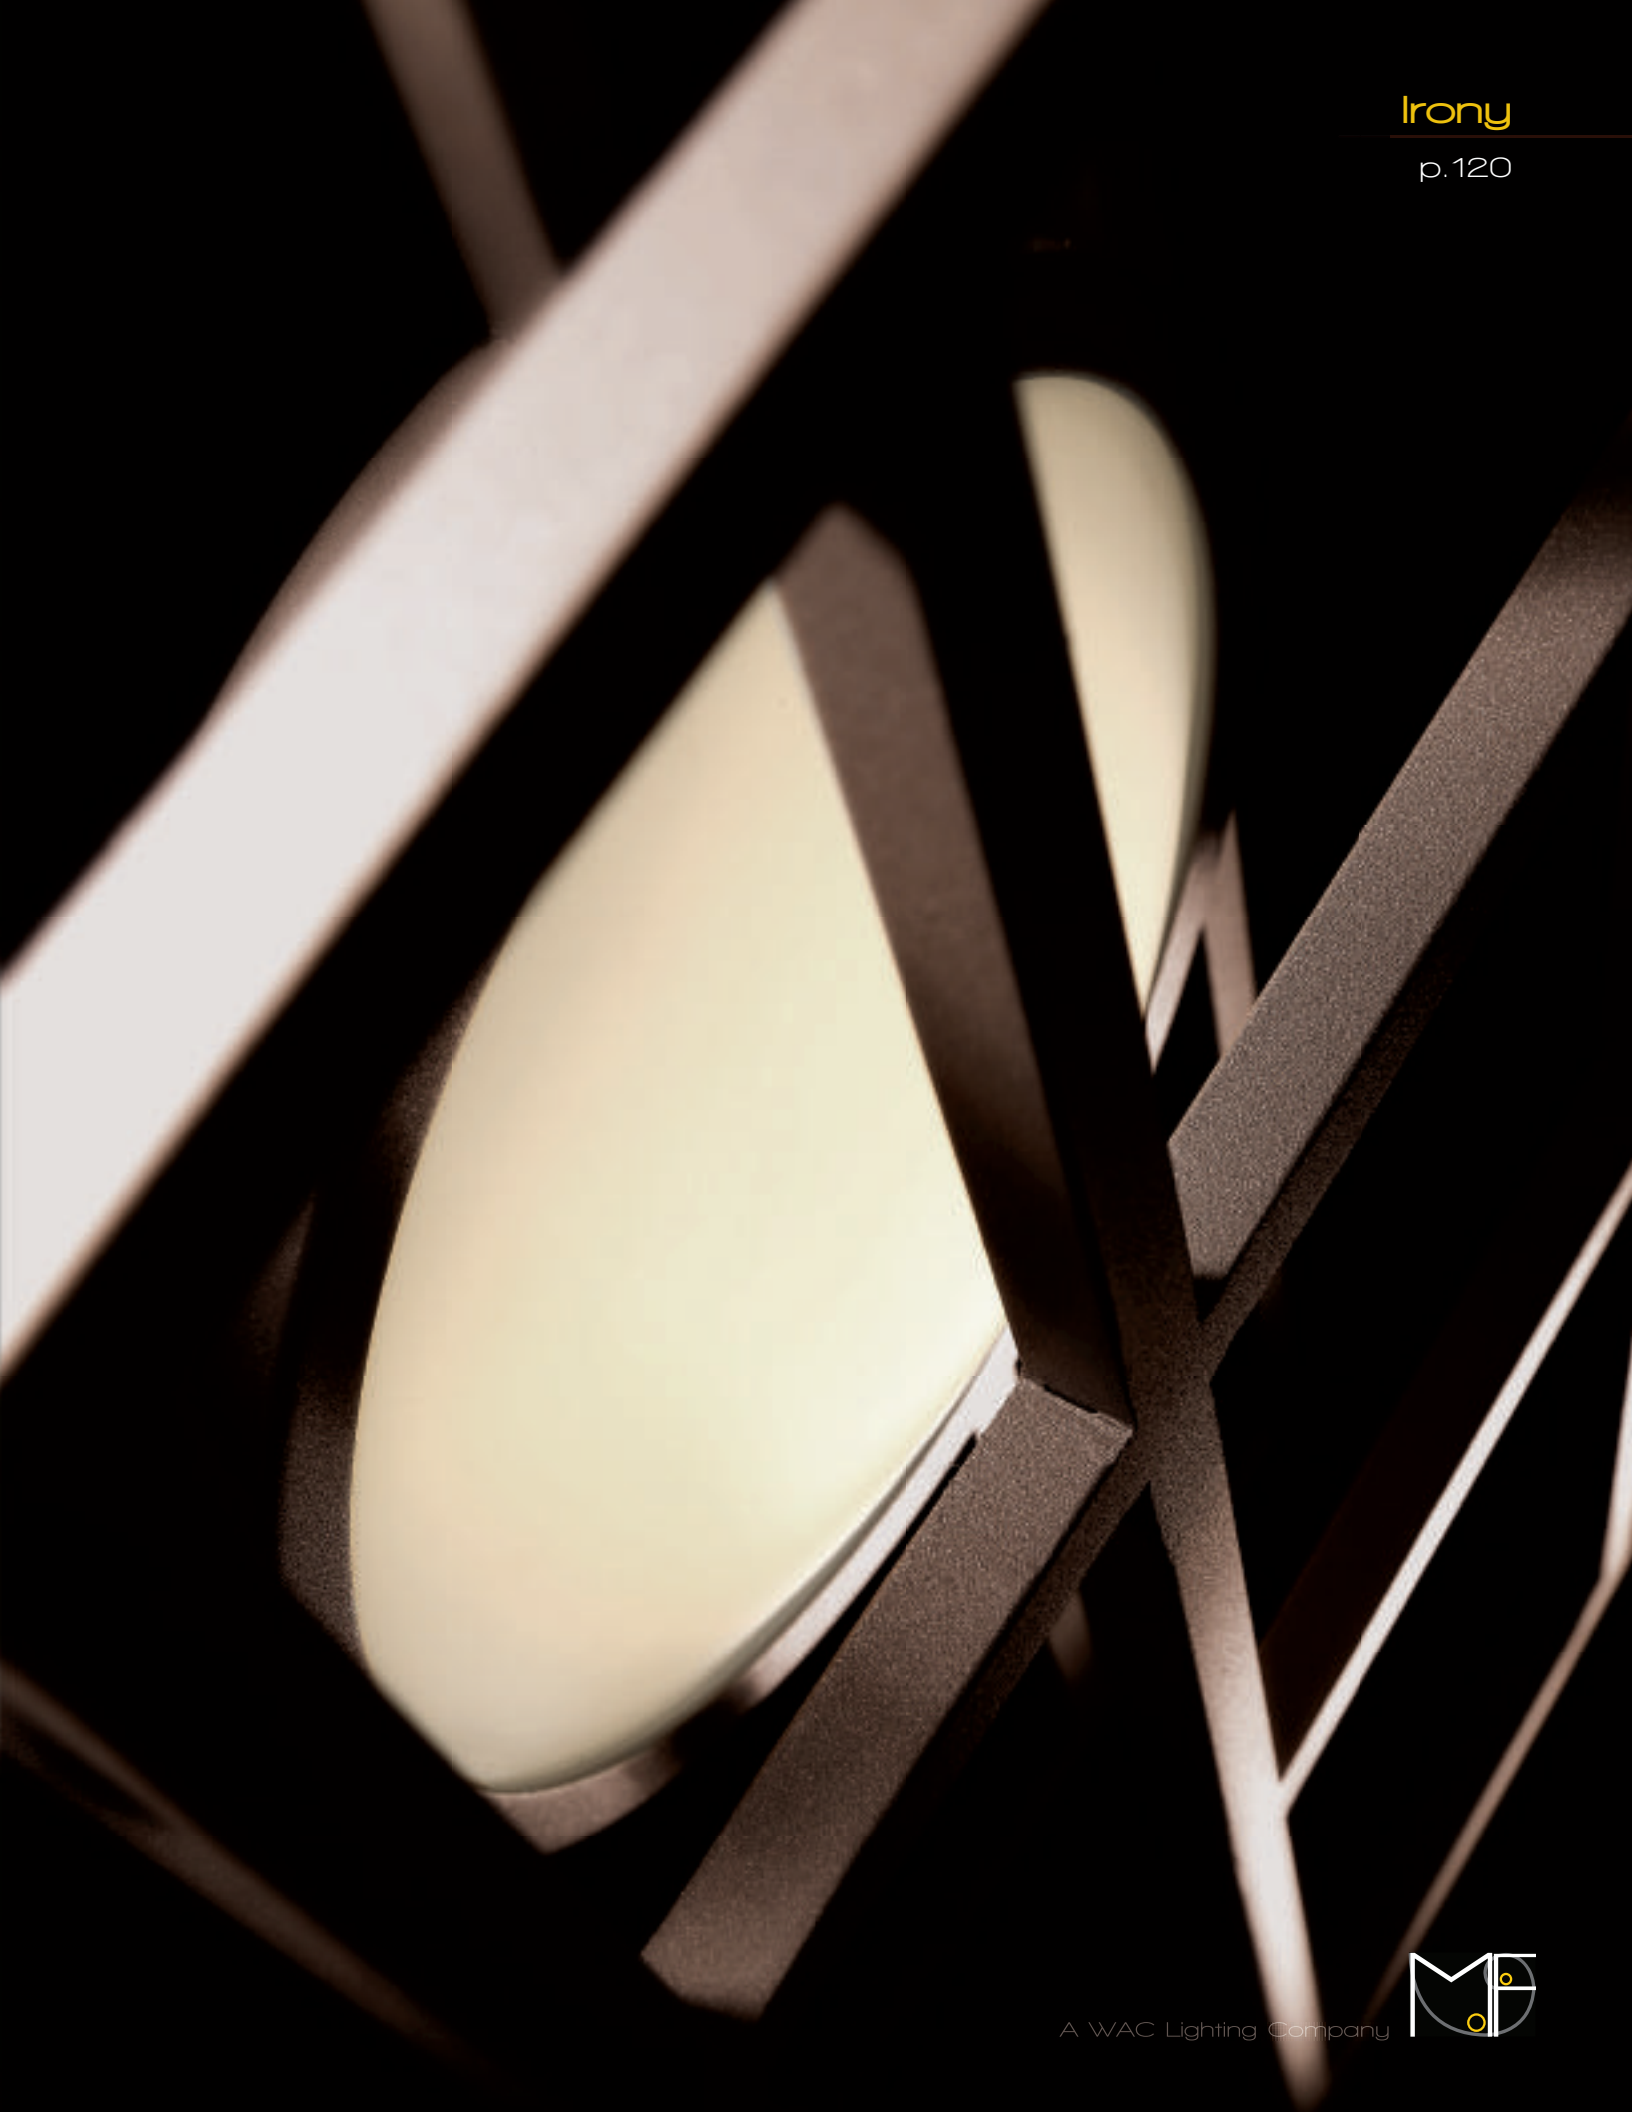

# Circle

An eternal shape, this simple floating metal shield mystically glows indirectly illuminating the surface behind. Exceptionally versatile as an interior or exterior wall or ceiling mount, use just one or many.




Brushed Aluminum




Bronze

- Rated to be mounted on walls and ceilings
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

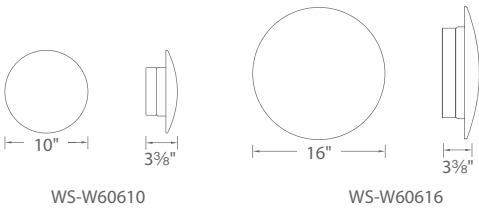


Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W60610</b>	10"	9W	120V	800	240	<b>BZ</b> Bronze
<b>WS-W60616</b>	16"	20W		1890	280	<b>AL</b> Brushed Aluminum

Example: **WS-W60610-BZ**  
For 277V special order, add an "F" before the finish: **WS-W60610F-BZ**

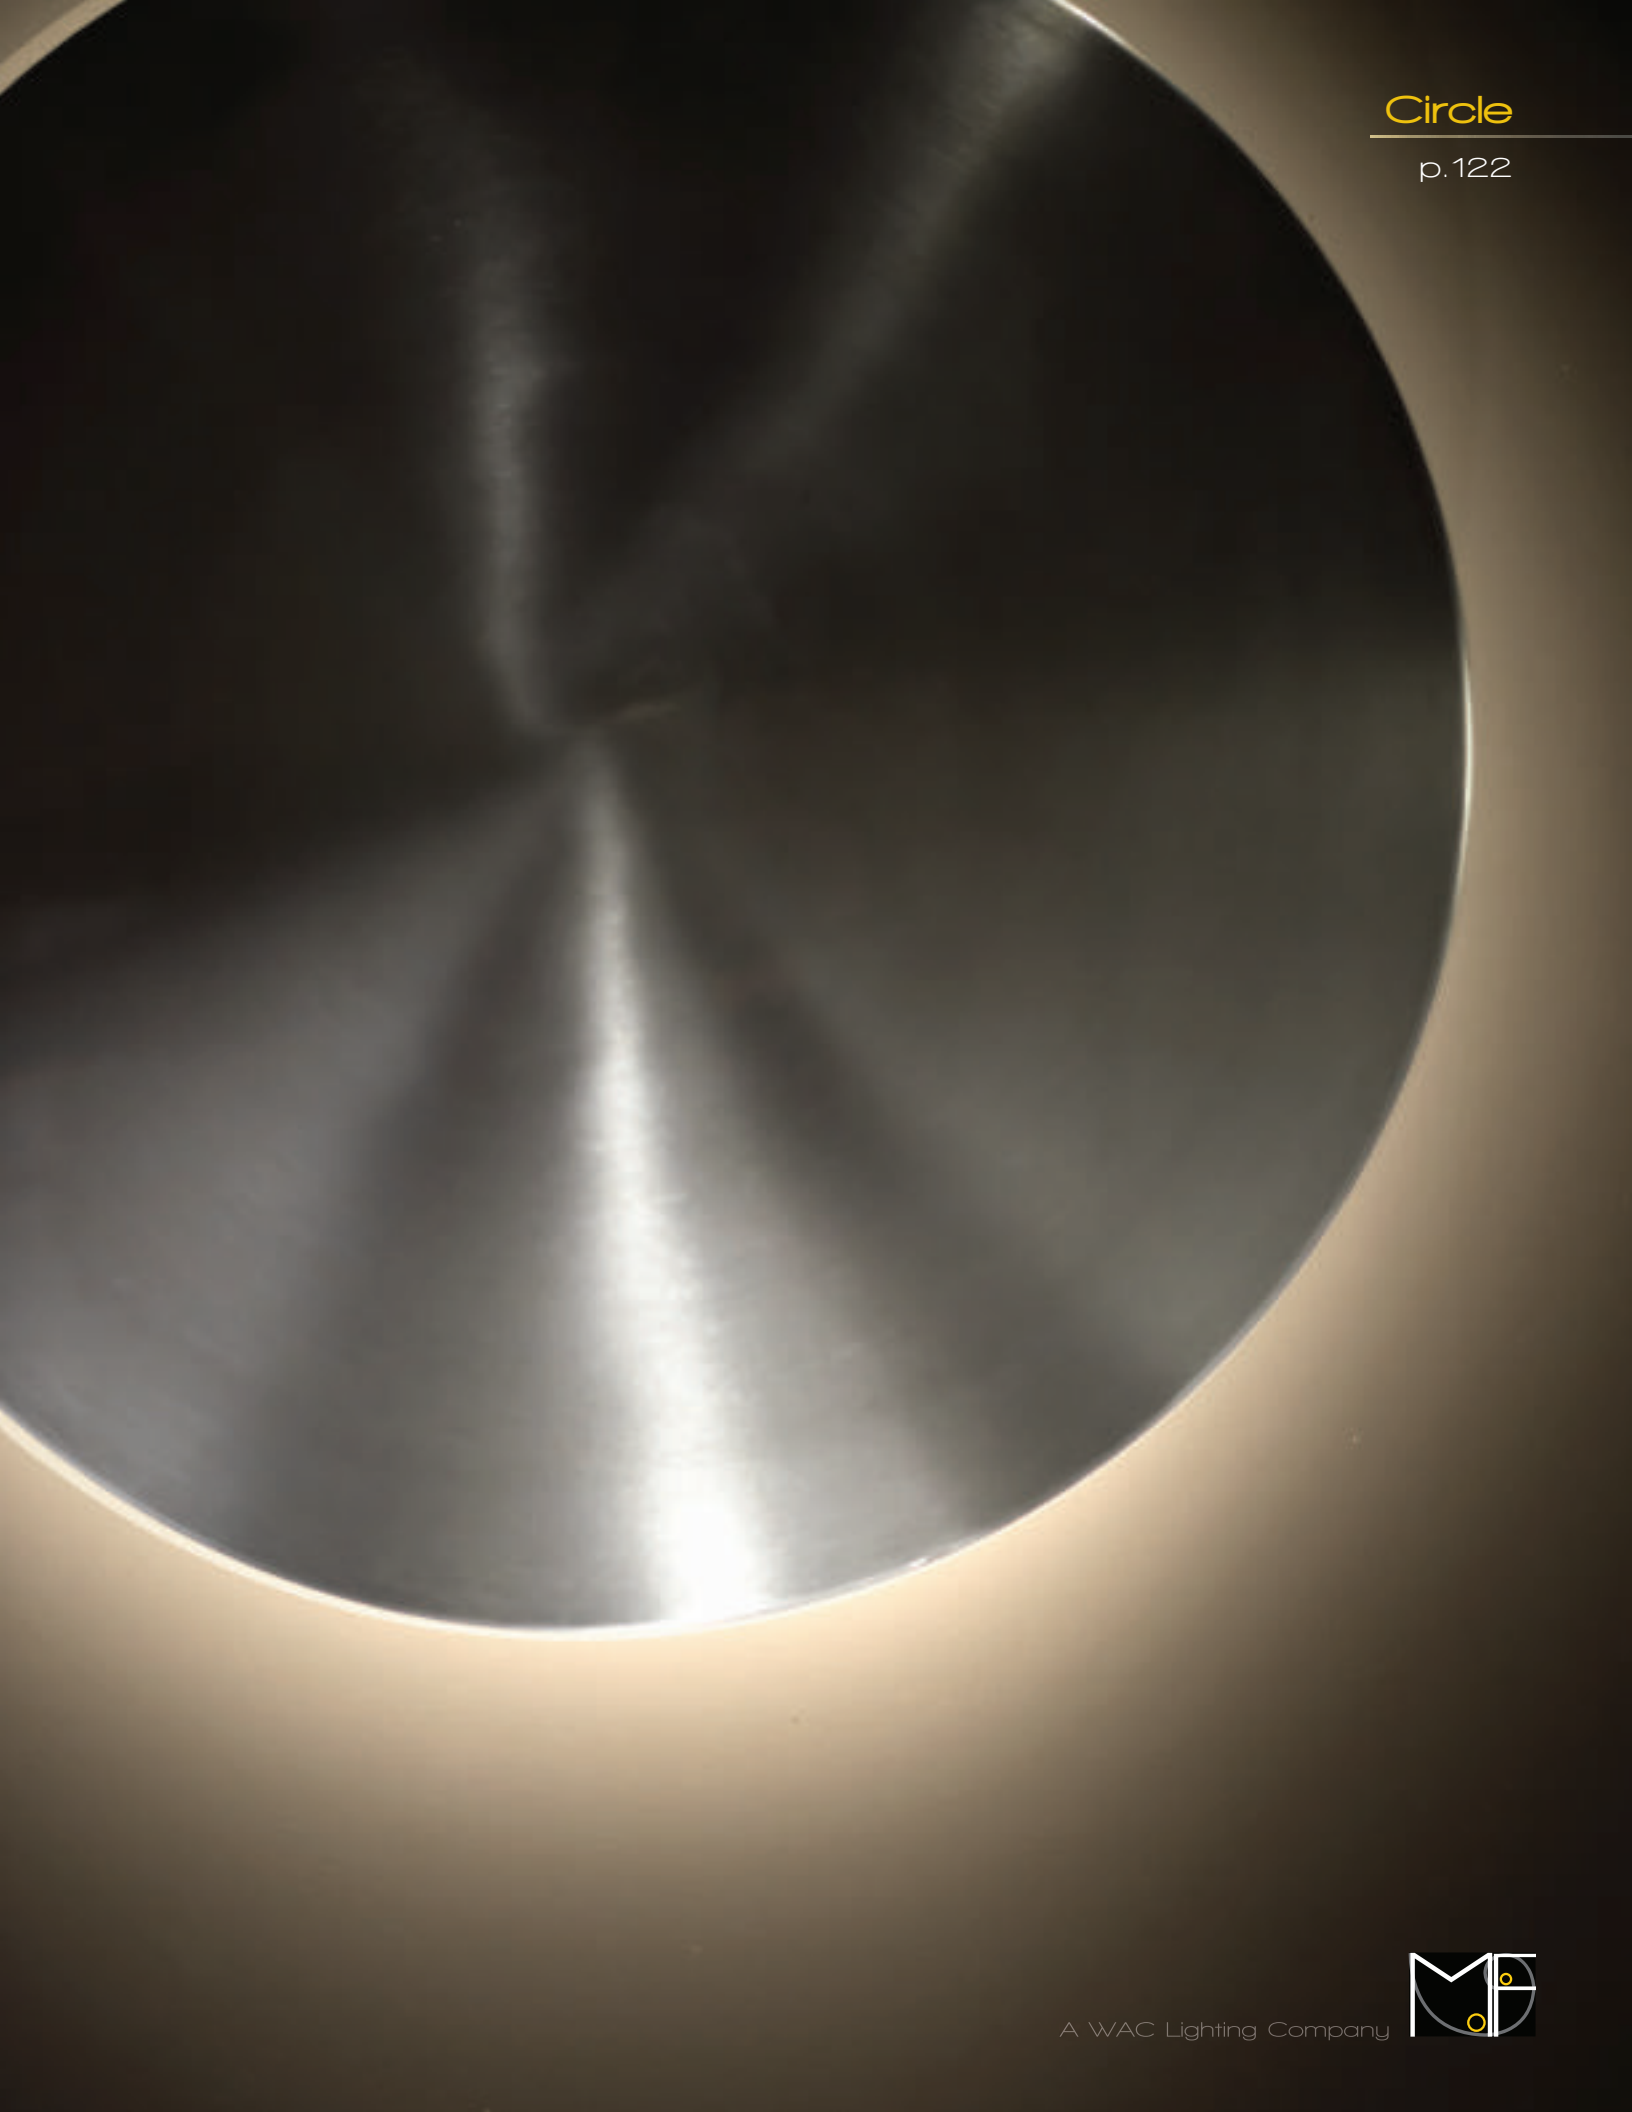


# Square

Four equal sides and a stream of light. Square artfully provides geometry to wall surfaces in the daytime when mounted in multiples while providing safe illumination of pathways and dramatic visual intrigue in the evening. Perfect for wall grazing surfaces.

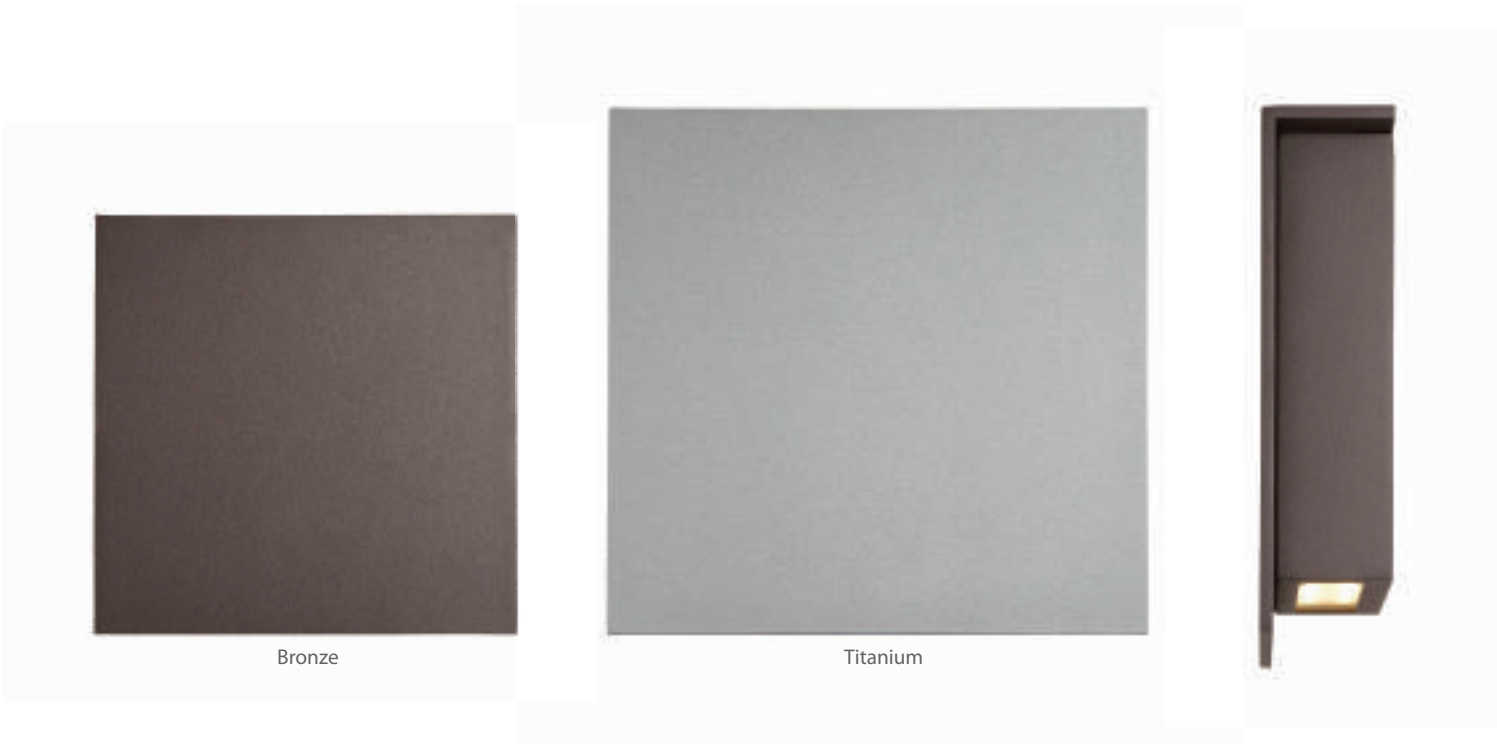


- Dark Sky friendly
- ADA compliant, low profile design
- ETL & cETL, wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

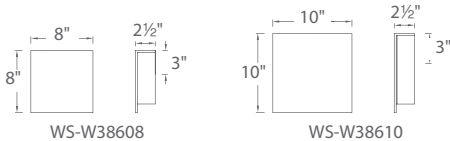

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W38608	8"	9W	120V	486	398	BZ Bronze
WS-W38610	10"	15W		836	720	TT Titanium


Example: **WS-W38608-BZ**  
For 277V special order, add an "F" before the finish: **WS-W38608F-BZ**

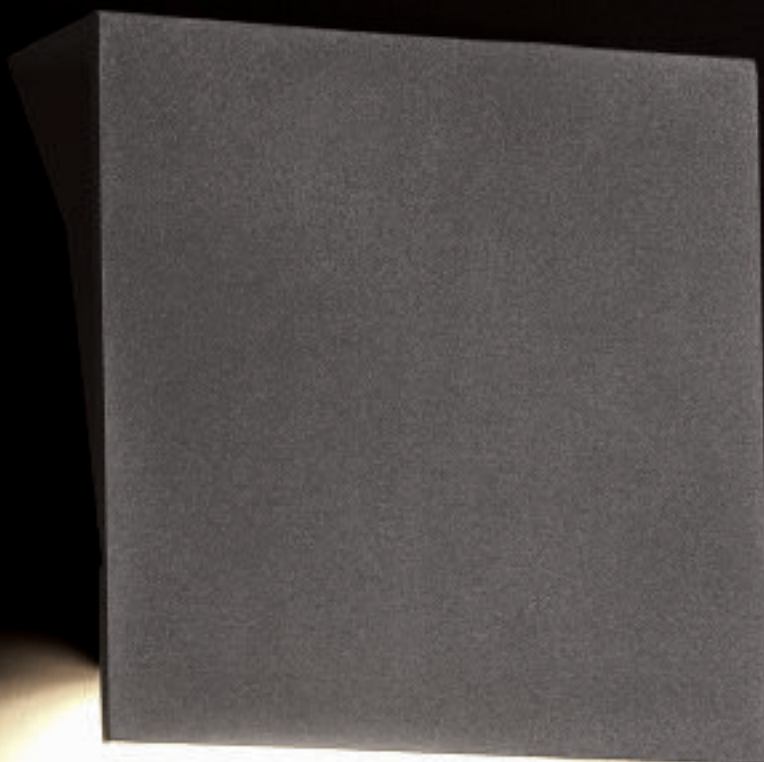




# Forq

Tall and austere. A simple form presents from the wall behind it while enhancing the sense of space by drawing the eye to the wall. Rated for interior and exterior applications.

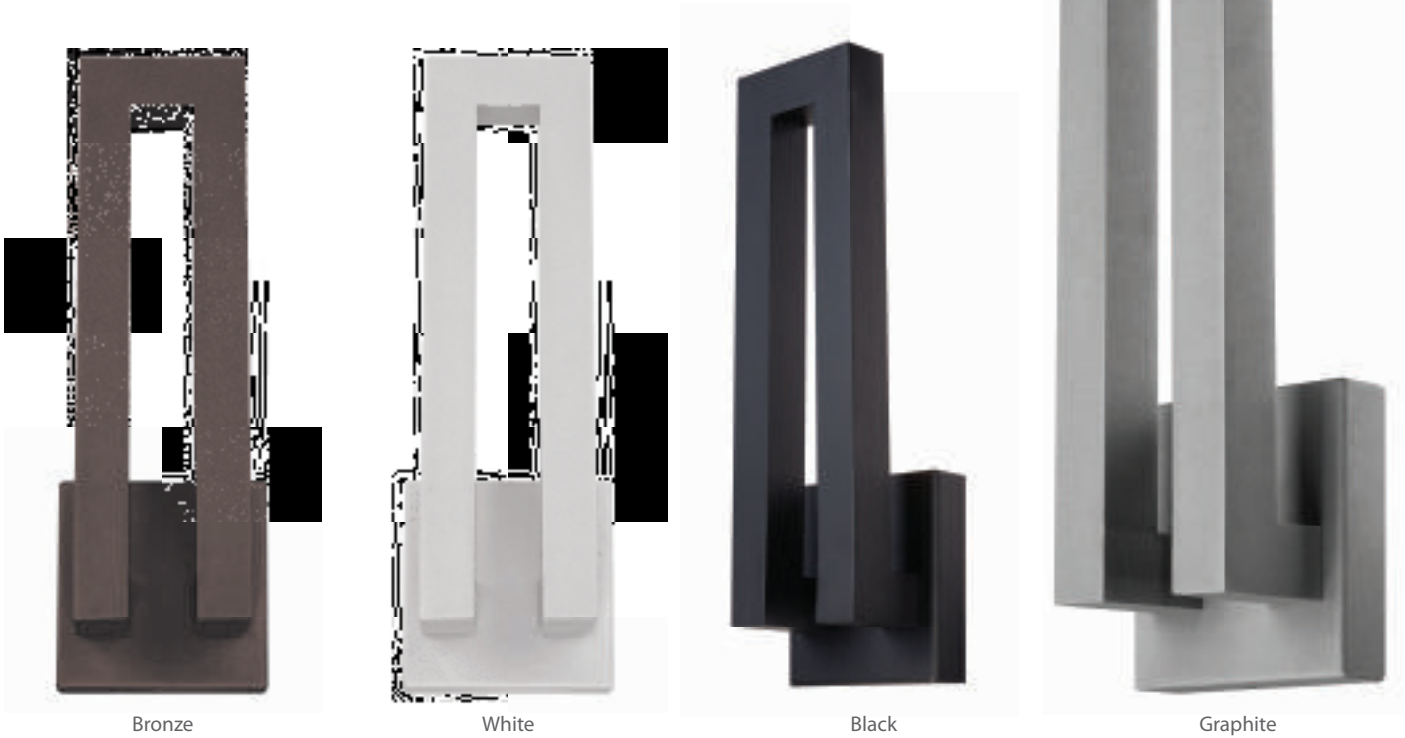

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP 65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- 277V option available special order
- Replaceable LED modules
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

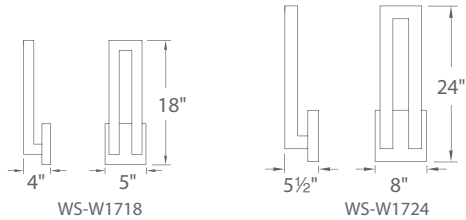

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1718	18"	22W	120V	1876	790	BK Black
WS-W1724	24"	33W	120V	1546	1443	BZ Bronze
						GH Graphite
						WT White

Example: **WS-W1718-GH**  
For 277V special order, add an "F" before the finish: **WS-W1718F-GH**




# Window

Designed to display individually or in multiples to create diamond patterns and imaginative arrays on walls. Illuminated walls accentuate these geometric silhouettes and complement today's architectural elements.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Integral driver in canopy
- Can be mounted in various ways to create patterns, squares or diamonds on walls
- Full range dimming when used with compatible dimmers\*
- Transformer located inside the fixture
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

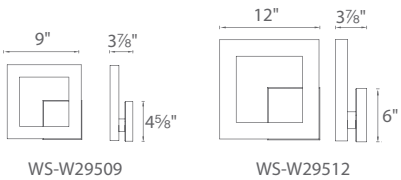

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W29509	9"	19.5W	120V	601	485	BZ Bronze
WS-W29512	12"	30W	120V	1212	880	GH Graphite

Example: **WS-W29509-BZ**  
For 277V special order, add an "F" before the finish: **WS-W29512F-GH**




# Twilight

Waning light of day. Indirect LED illumination gives the illusion of twilight. Glare free illumination with ambient and down lighting for safety, security and architectural accent.




Bronze

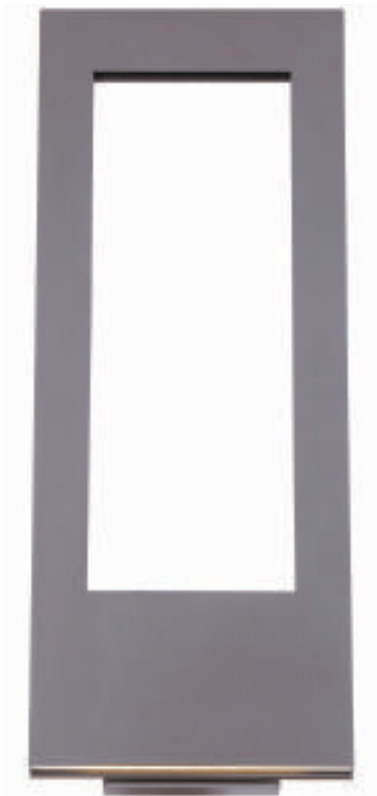

Graphite

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

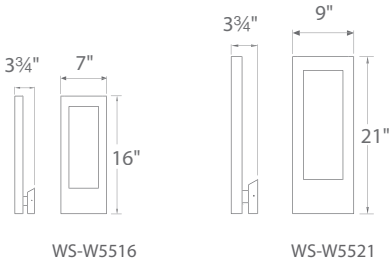

Model	Height	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5516	16"	7"	25W	120V	1060	625	BZ Bronze
WS-W5521	21"	9"	28W	120V	1241	770	GH Graphite

Example: WS-W5516-BZ






# Void

A futuristic art interpretation of a lantern. With creative spirit, the Void sculpture draws the eye to what is absent within the circle of light and away from the structure itself. Infused with LEDs throughout, the negative expression becomes positive with an illusion of volume in a low profile design. A functional down light illuminates pathways or corridors.



- Illuminated ring and downlight
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

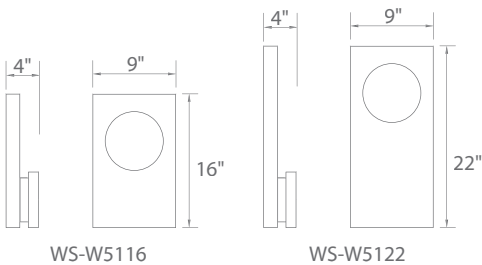

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5116	16"	20W	120V	1660	350	BK Black
WS-W5122	22"					GH Graphite
						WT White

Example: WS-W5116-BK




# Dawn

Energy efficient indirect ambient lighting and down lighting creates bright, beautiful spatial illumination for superb security and architectural accent.



- ETL & cETL wet location listed, IP65 rated
- Back light and down light
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- 277V option available special order
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

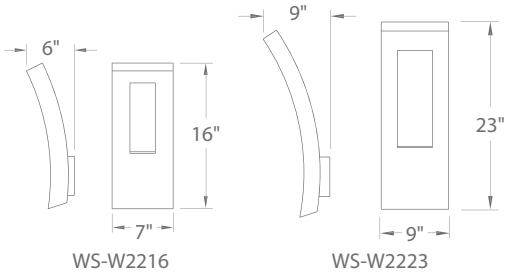

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2216	16"	16W	120V	960	490	BZ Bronze
WS-W2223	23"	24W	120V	1440	735	GH Graphite

Example: **WS-W2216-AL**  
For 277V special order, add an "F" before the finish: **WS-W2216F-BZ**





# Big V


Sometimes, the name says it all. More impressive in real life, this monolith of a vaulted sconce will light a façade and make a great, big, bold design statement.



Graphite



Bronze

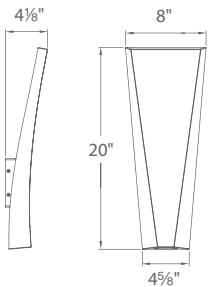


WS-W69620

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Up & down light
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- Driver located in canopy
- Universal driver (120V-220V-277V)
- 55,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W69620	20"	23W	120V-220V-277V	1478	1249	GH Graphite
WS-W69628	28"	28W		1673	1344	BZ Bronze

Example: WS-W69620-GH

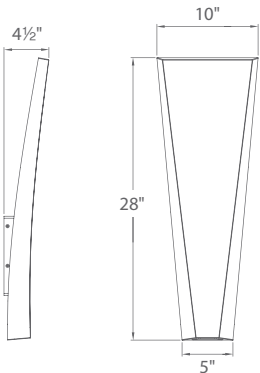

WS-W69628




# Skyscraper

Elevate your space. A classic architectural design thoughtfully engineered for robustness to withstand commercial use for interiors or exteriors. A UV stabilized acrylic diffuser and marine grade stainless steel structure complete this specification-grade wall mount luminaire. Available in either bronze or stainless steel finish.




- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- F1 rated acrylic
- SS - 316 marine grade, stainless steel construction
- BZ - Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available special order
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

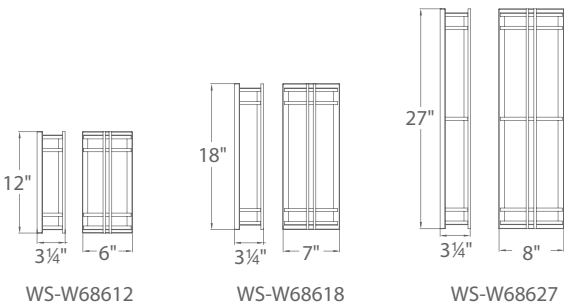

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W68612	12"	12W		605	418	BZ Bronze SS Stainless Steel
WS-W68618	18"	19W	120V	1098	741	
WS-W68627	27"	24W		1272	880	

Example: **WS-W68612-BZ**  
For 277V special order, add an "F" before the finish: **WS-W68612F-BZ**

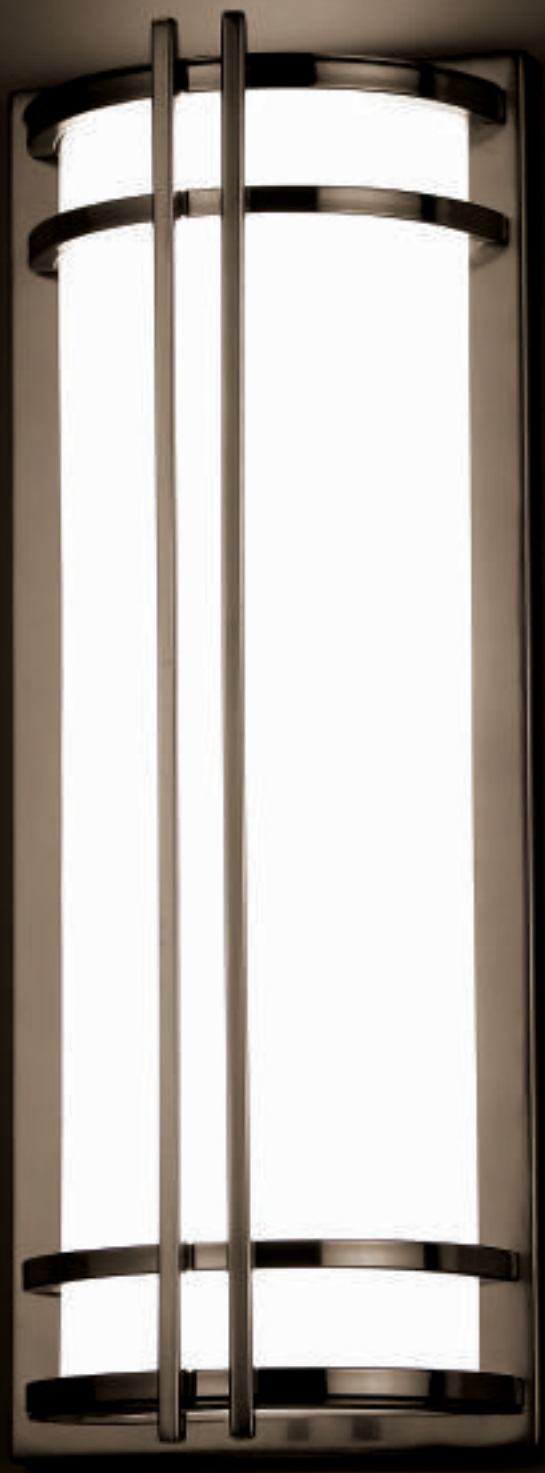

# Spire

Elegant proportions and slender curves. A handsome interior or exterior LED sconce of bent glass and precise metal hardware imbues visions of cityscapes and urban architecture.



Bronze




Brushed Aluminum

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with bent white glass
- Full range dimming when used with compatible dimmers
- Integral transformer in canopy
- Replaceable LED module
- **60,000 hour rated life**
- **Color Temp: 3000K**
- **CRI: 90**

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W2712</b>	12"	16W	120V	940	330	<b>AL</b> Brushed Aluminum
<b>WS-W2717</b>	17"	27W		1566	685	<b>BZ</b> Bronze

Example: **WS-W2712-BZ**

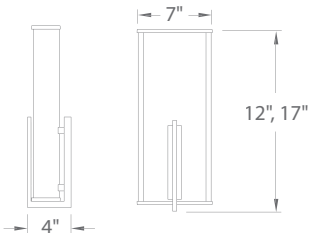



Spire

p.140



A WAC Lighting Company



# Phantom

A highly polished, stylish appearance with sharp curb appeal, this stunning family of distinctive mitered glass columns exhibits a shallow depth and clean, architectural look. Constructed in bronze powder coated aluminum or marine grade stainless steel and completely sealed for waterside locations in luxury residential and commercial environments.



Graphite




Bronze



Stainless Steel Construction

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- BZ - Aluminum construction
- SS - 316 marine grade, stainless steel construction
- Mitered white silk screened glass
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers\*
- 277V option available *special order*
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

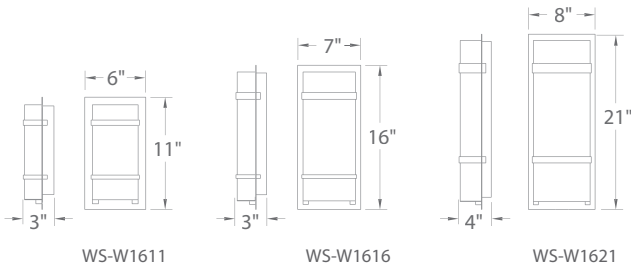

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1611	11"	12W		628	200	BZ Bronze
WS-W1616	16"	19W	120V	1250	600	GH Graphite
WS-W1621	21"	21W		1566	755	SS Stainless Steel Construction

Example: **WS-W1611-SS**  
For 277V special order, add an "F" before the finish: **WS-W1611F-SS**




# Elevation

Zen architecture. A sectional profile enhances the precisely drawn structural elements of the design. Silk-screened linen on glass diffuses soft ambient light while a down light delivers illumination for pathways in an all LED design. Perfectly adorns entries, columns or walls in luxury resorts, restaurants and dwellings.

- Includes downlight
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mitered glass - screen linen white
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5216	16"	21W	120V	1650	555	BZ Bronze
WS-W5222	22"	25W		2030	775	

Example: WS-W5216-BZ

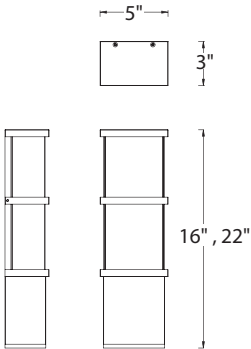






# Omni

LEDs sparkle mesmerizingly through glacial glass for interior or exterior applications. Sizes and finishes are available to illuminate any space with a brilliant combination of ambient lighting and down lighting. Weather proof stainless steel or bronze finishes complete this inspiring sconce.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Stainless steel or bronze aluminum
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

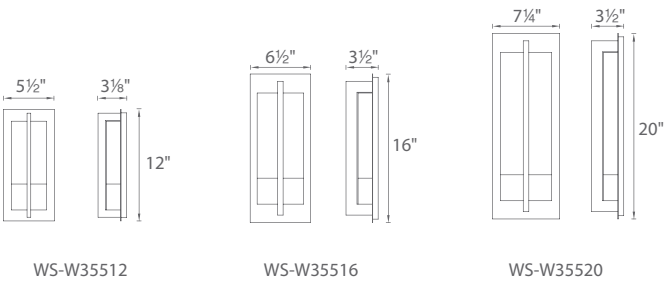

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W35512	12"	8W	120V	145	75	SS <i>Stainless Steel</i> BZ <i>Bronze</i>
WS-W35516	16"	12W	120V	200	90	
WS-W35520	20"	16W	120V	300	150	

Example: WS-W35520-SS



# Torch


Crowned with exquisite Plastra glass hand formed and crafted utilizing a 13th century artisanship technique, Torch illuminates with ambient interest while delivering down lighting for pathways and floors.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W37520	20"	8W	120V	240	180	ORB Oil Rubbed Bronze 

Example: WS-W37520-ORB

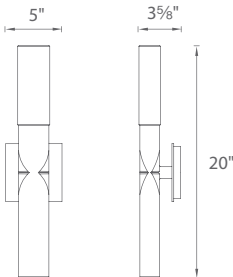





# Sentinel

Stately etched opal glass enhanced with a casted diamond bangle. Sumptuous aesthetics merges with advanced technology lighting for upscale spaces. Mounts upward or downward.



- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

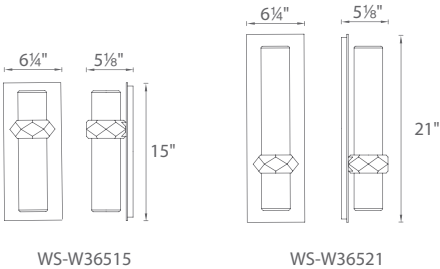

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W36515	15"	15W	120V	914	580	ORB Oil Rubbed Bronze 
WS-W36521	21"	24W	120V	1488	965	

Example: WS-W36521-ORB





# Jedi

A commanding luminaire. With high-tech single spot multi-chip LED light sources, the Jedi sconce provides ambient light while a hidden down light projects a narrow beam of light down the wall for design accent and safety. A cutting-edge solution for upscale homes and challenging hospitality and healthcare applications.




Brushed Aluminum



Bronze

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Sconce light and down light
- Etched opal glass sconce with twist lock for easy removal
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

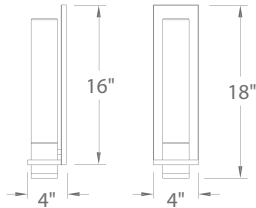

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-2818</b>	18"	13W	120V	835	205	<b>AL</b> Brushed Aluminum <b>BZ</b> Bronze

Example: **WS-2818-AL**




# Helix

Sleek and commanding, the dramatic curves and contours define this graceful design. Interest generating illumination with up and down light.




Bronze

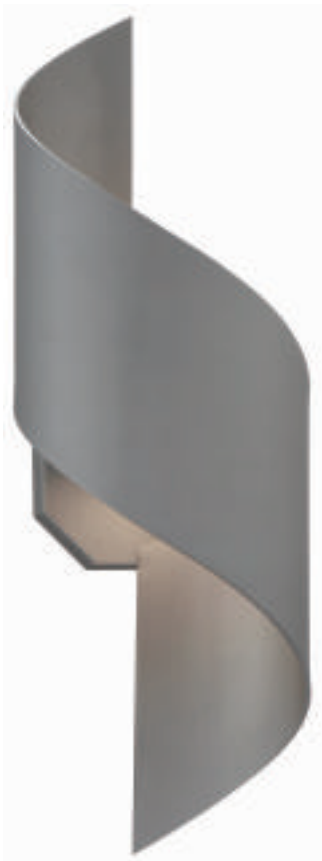

Graphite

- ETL & cETL wet location listed, IP65 rated
- Hand formed heavy aluminum gauge
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

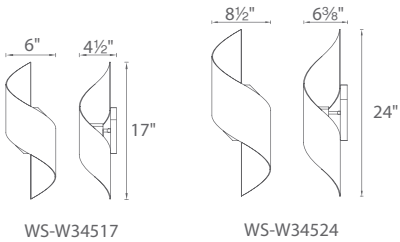

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W34517	17"	8W	120V	221	140	BZ Bronze
WS-W34524	24"			233	150	GH Graphite

Example: WS-W34524-GH






# Origami


Style unfolds with this distinctive sculpted wall sconce for a shadowbox effect. A curvaceous form accents and grazes the wall while enhancing the space. Perfect for fine interiors and exteriors that require an innovative decorative accent.



- ETL & cETL wet location listed, IP65 rated
- Dark Sky Friendly
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W27515	15"	8W	120V	210	150	BZ Bronze 

Example: **WS-W27515-BZ**





# Origin

This naturalistic sconce is accentuated by curved upright panels that allow light to escape in such a way as to suggest movement. A hidden downlight projects a narrow beam of lights for designer accent and safety. Available in two finishes suitable for both interiors and exteriors.



Bronze




Graphite

- Up and down light
- Luminaire may be rotated 180° when mounting
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W63608</b>	8"	7.5W	120V	280	210	<b>BZ</b> Bronze <b>GH</b> Graphite

Example: **WS-W63608-BZ**  
For 277V special order, add an "F" before the finish: **WS-W63608F-BZ**

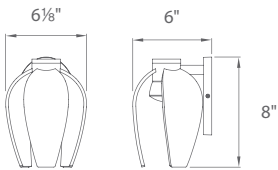



# Boule

Bring a timeless style element into your home. Sculptural clear hammered optic glass provides a brilliant glow and creates an exquisite textural display emulating the movement of water from within. An extraordinary design ideal for accenting doorways or foyers.




Oil Rubbed Bronze




Graphite

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mouth blown hammered clear glass with aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90



WS-W31509

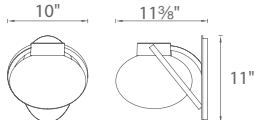

WS-W31511


Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W31509	9"	10W	120V	626	585	ORB Oil Rubbed Bronze
WS-W31511	11"			626	620	GH Graphite

Example: WS-W31509-ORB



Boule

p.160

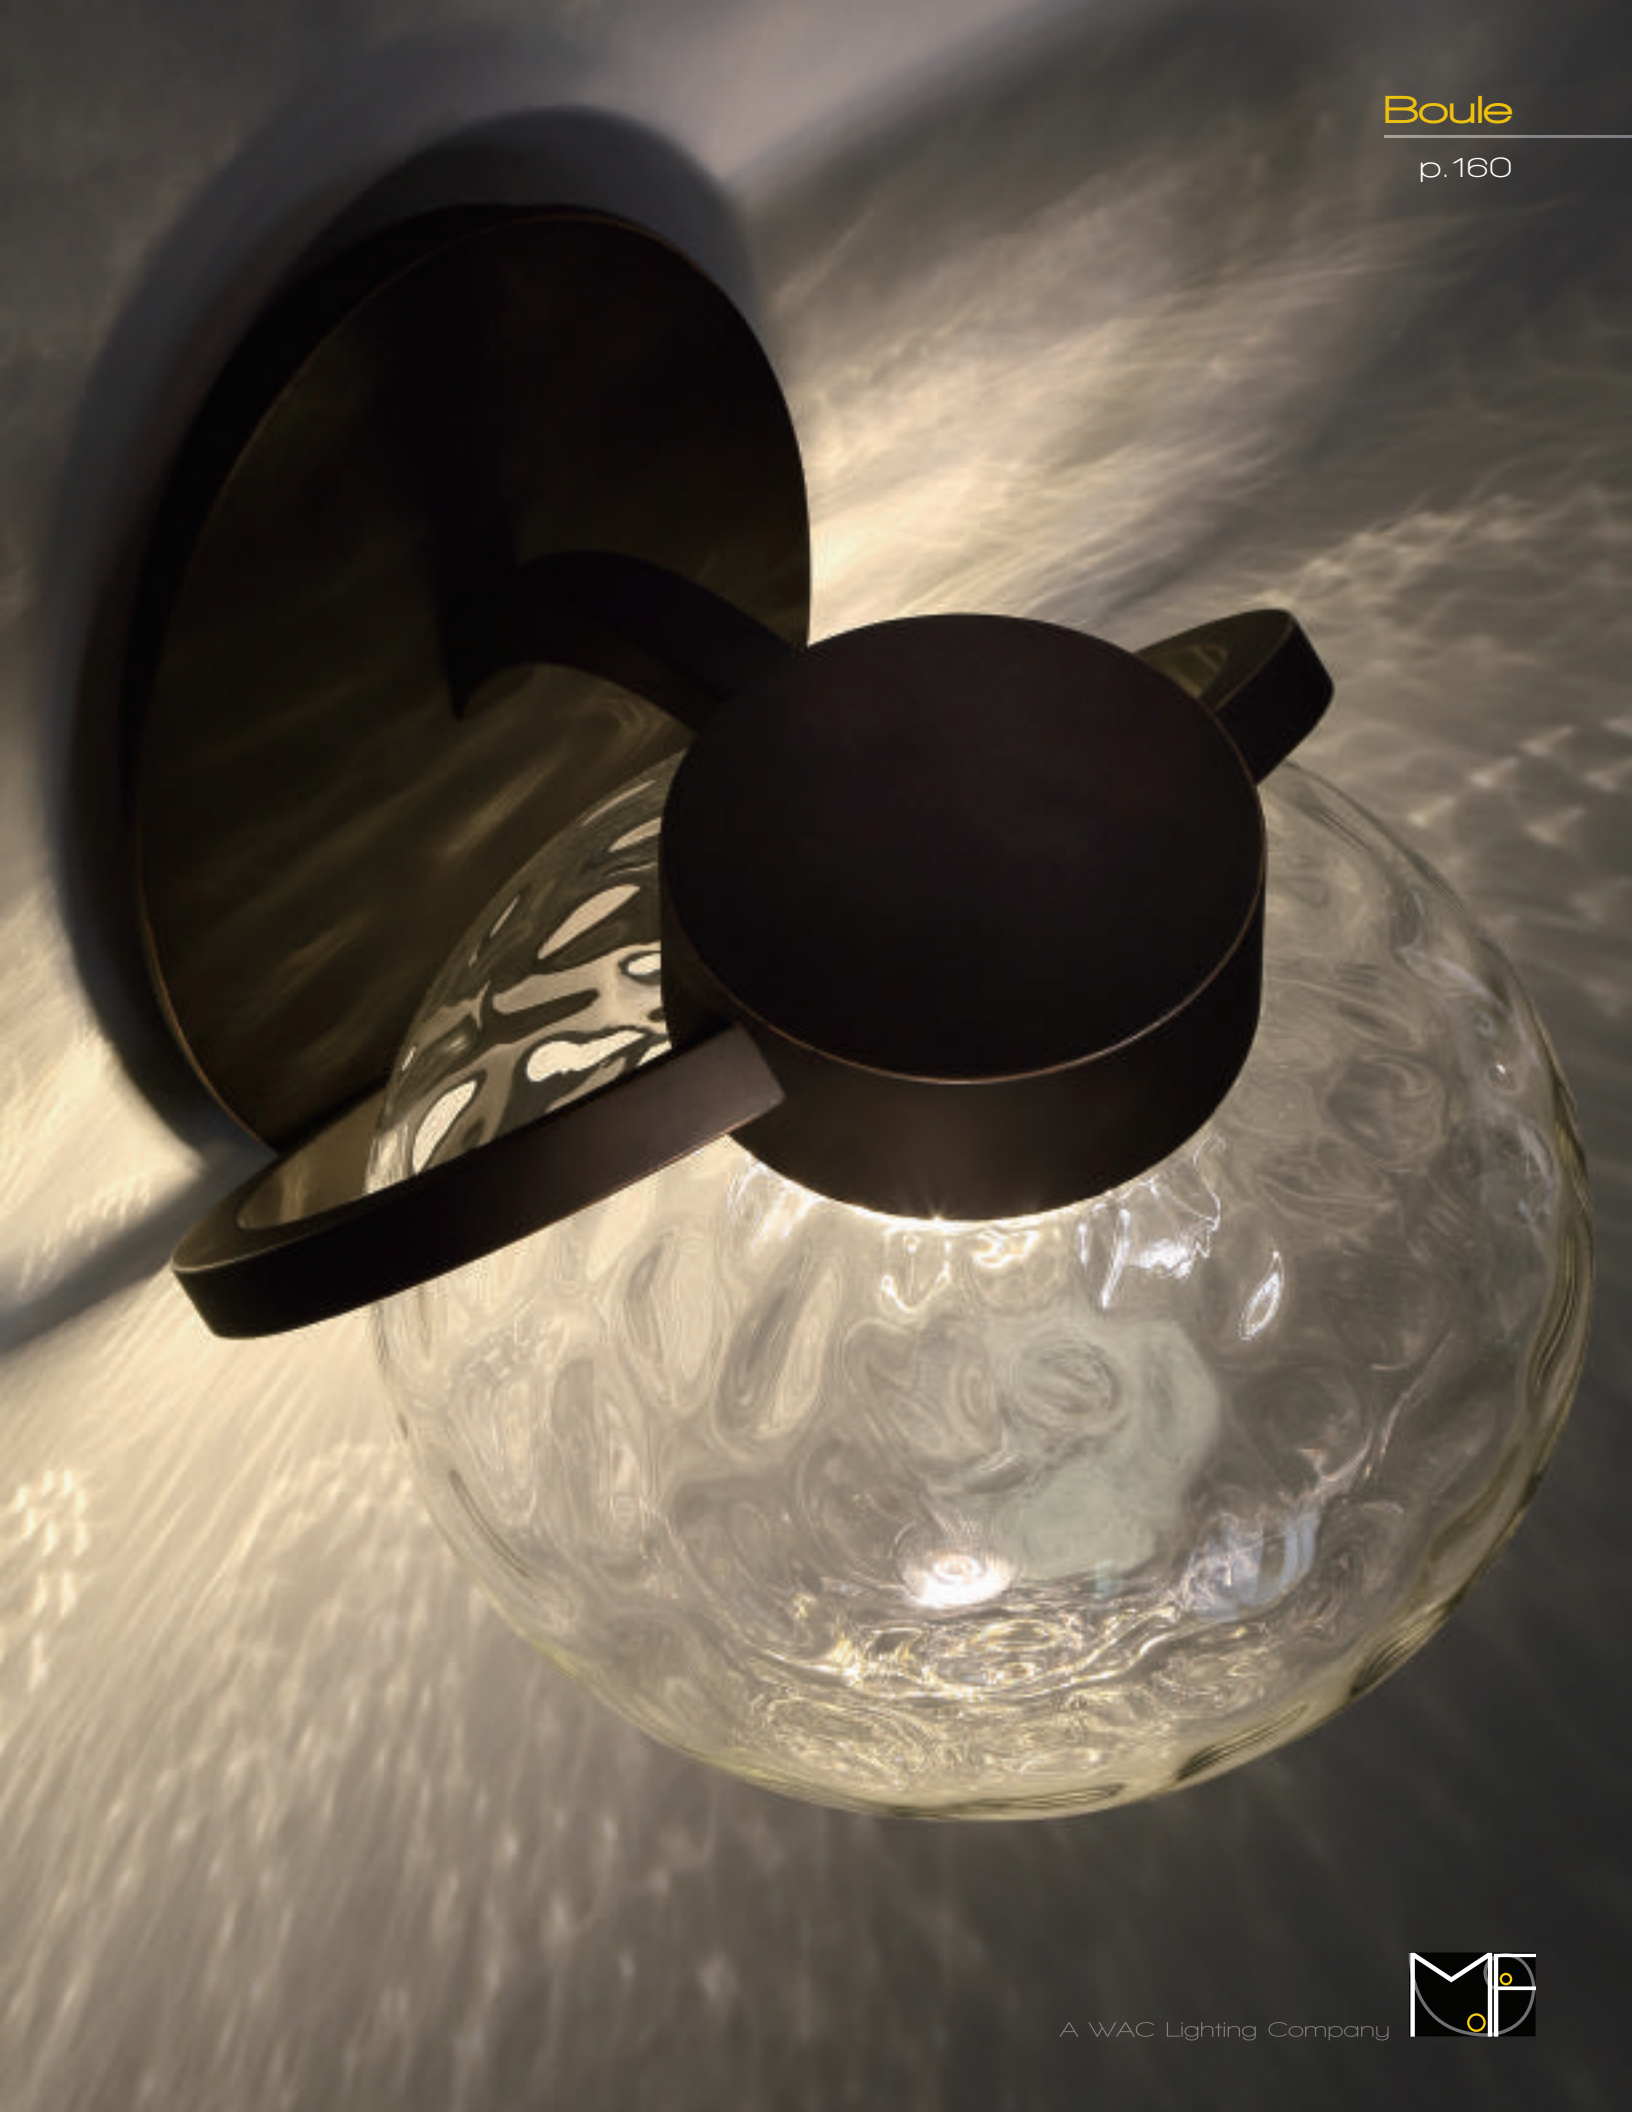


# Lucid


A clearly defined orb gently encircles a cylinder of opal glass. Lucid is a clean and updated version of the traditional lantern that may be hung in multiples in an outdoor entertainment area or over an entryway. See pages 207-208 for coordinating pendant which is also available for cohesive specifications around upscale residential or hospitality commercial spaces both inside and out.




- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with mouth blown clear etched opal glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W74612</b>	12"	8W	120V	670	460	<b>BK</b> Black 
<b>WS-W74615</b>	15"	12W		980	660	

Example: **WS-W74612-BK**



WS-W74612

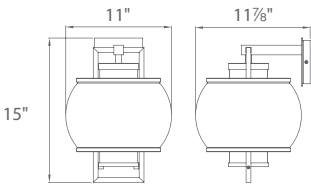

WS-W74615




# Deco


The simple design of Deco provides refuge in a complex world. Clean and understated with a clear outer layer of glass encasing an etched white opal glass shade, this upscale luminaire illuminates fine exteriors and interiors of transitional and contemporary spaces.



- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction
- Clear mouth blown outer glass and etched opal interior sconce
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W1815</b>	15"	12W	120V	625	360	<b>BK</b> Black 
<b>WS-W1821</b>	21"			625	370	

Example: **WS-W1815-BK**

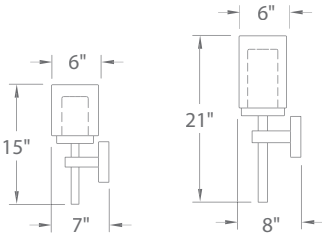









# Structure

A refreshing look for refined tastes. A raindrop glass cylinder suspended within an architectural frame. Beautifully illuminated with LED down lighting for a magical appearance of crystallized effervescence. Dark sky orientation preserves observation of star filled skies.



- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Clear seeded crystal
- Dark sky friendly
- Full range dimming when used with compatible dimmers\*
- Universal driver (120V-220V-277V)
- Integral universal driver located in canopy
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

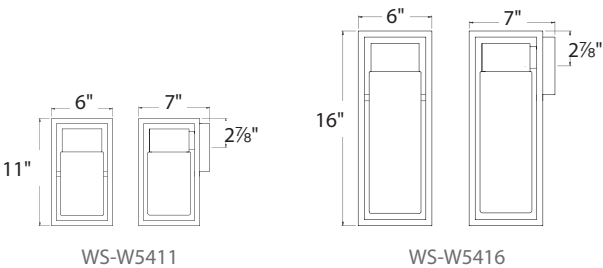

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W5411	11"	11W	120V-220V-277V	915	530	BK Black 
WS-W5416	16"				525	

Example: **WS-W5411-BK**



# Burlington

Utilitarian design with a thick walled seeded glass shade reminiscent of antique glassmaking. A perfect complement to board and battens, Burlington is at home in the woods with its industrial styling.



Bronze




Graphite

- Dark Sky friendly
- CEC Title 24 Compliant
- ETL & cETL wet location listed, IP65 rated
- Aluminum construction with mouth blown clear seedy glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W72611</b>	10"	4W	120V	210	150	<b>BZ</b> Bronze
<b>WS-W72614</b>	14"	9W	120V	695	580	<b>GH</b> Graphite

Example: **WS-W72611-BZ**

For 277V special order, add an "F" before the finish: **WS-W72611F-BZ**

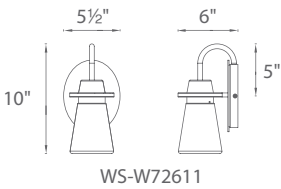

WS-W72611

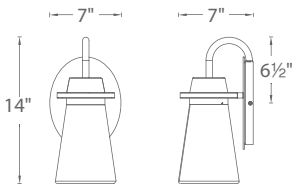

WS-W72614






# Suspense

Giving the proverbial nod to tradition, it takes a powerful LED to pull off this look in a dark sky design. This contemporary lantern showcases a mouth blown clear glass element and is equipped with state of the art LEDs for a filament-free design. Couple your passion for living with our passion for lighting.



- ETL & cETL wet location listed, IP65 rated
- WS-W1917 is CEC Title 24 Compliant
- Dark sky friendly
- Twist lock glass for minimal hardware
- Aluminum construction with a thick, mouth blown clear glass element
- Integral transformer in canopy
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- WS-W1917 features universal driver (120V-220V-277V)
- 277V option available for WS-W1911 & WS-W1915 special order
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

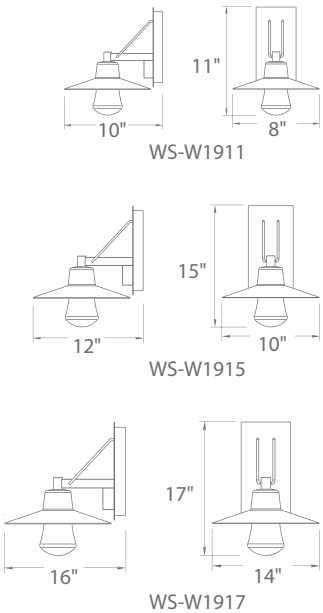

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W1911*	11"		120V	860	590	AL Brushed Aluminum
WS-W1915*	15"	11W	120V	860	625	BZ Bronze
WS-W1917	17"		120V-220V-277V	1050	865	

Example: **WS-W1911-AL**

\*For 277 special order (WS-W1911 & WS-W1915), add an "F" before the finish: **WS-W1915F-AL**





# Pasadena

Design inspired by the Gamble House, one of the finest examples of American bungalow style architecture. Pasadena exhibits California arts and crafts styling in an energy conscious LED design that also prevents light pollution of the night sky.



Graphite




Bronze


- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- Driver located in canopy
- Universal driver (120V-220V-277V)
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W62608</b>	8"	8W	120V-220V-277V	425	210	<b>BZ</b> Bronze
<b>WS-W62610</b>	10"	8W		425	210	<b>GH</b> Graphite

Example: **WS-W62608-BZ**

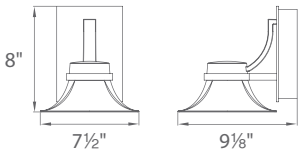

WS-W62608

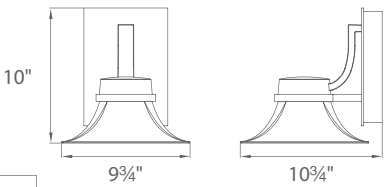

WS-W62610



# Balthus

New 21" Size

Heavy hardware exhibits craftsman details.  
Mouth blown hammered clear glass creates  
resplendent sparkles on the wall.




Graphite



Oil Rubbed Bronze



- ETL & cETL wet location listed, IP65 rated
- Dark Sky Friendly
- Mouth blown hammered clear glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available for WS-W28521 special order
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

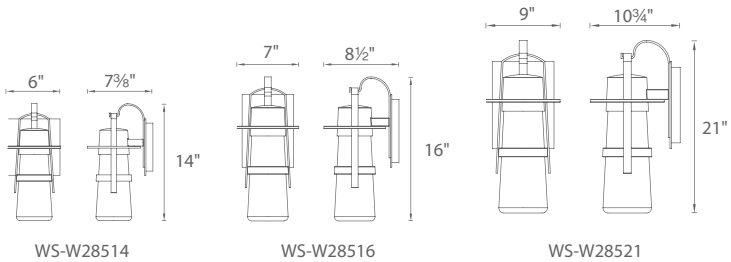

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W28514	14"	10W		478	455	GH Graphite ORB Oil Rubbed Bronze
WS-W28516	16"	10W	120V	481	465	
WS-W28521**	21"	10W		475	470	

Example: **WS-W28514-ORB**

\*\*For 277V special order, add an "F" before the finish: **WS-W28521F-ORB**



Balthus

p.174





# Vitrine

Raindrops falling gently on the window pane. This stunning effect is the result of concealed LEDs illuminating from above while casting a warm beam through clear hammered seeded, mouth blown optic glass. The durable body and minimalist design complement a multiplicity of architectural styles. Perfect for indoor and outdoor settings in luxury homes and resorts.




Bronze



Graphite

- ETL & cETL wet location listed, IP65 rated
- Clear hammered seeded mouth blown glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

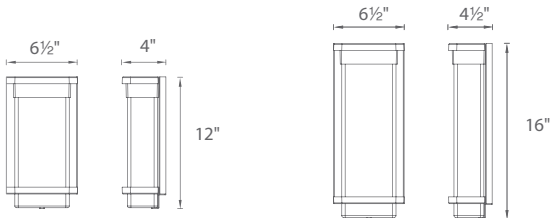

WS-W32512

WS-W32516

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W32512	12"	5W	120V	230	205	BZ Bronze
WS-W32516	16"	10.5W	120V	380	365	GH Graphite

Example: WS-W32516-BZ





# Pandora

A multi-dimensional and versatile design. The sculpted sconce with a tiered design is hand finished in Oil Rubbed Bronze. Three sizes available.



- ETL & cETL wet location listed, IP65 rated
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

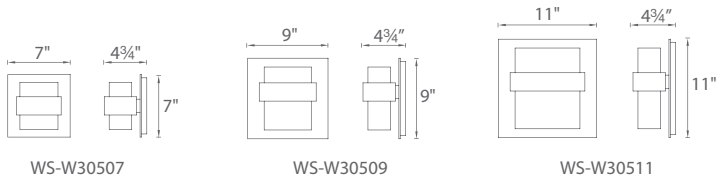

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W30507	7"	12W		270	200	ORB Oil Rubbed Bronze 
WS-W30509	9"	20W	120V	546	410	
WS-W30511	11"	28W		550	415	

Example: WS-W30509-ORB





# Kyoto

A Shinto inspired architectural design. Miter cut and joined white glass provides crisp lines to complement the hardware.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Mitered glass and aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

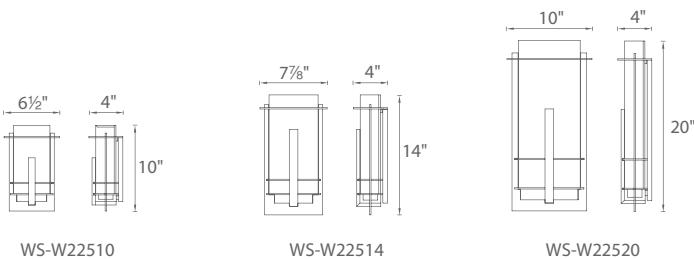

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W22510	10"	10W		616	330	BZ Bronze 
WS-W22514	14"	15.5W	120V	918	465	
WS-W22520	20"	26.5W		1620	840	

Example: WS-W22520-BZ







# Berkeley

Arts and crafts styling with a refreshing twist. The enduring look of forged iron over mouth blown etched opal glass. A handsome addition to any setting.



- ADA compliant for WS-W21511, WS-W21516, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant for WS-W21511
- Weather resistant powder coated finish
- Solid aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

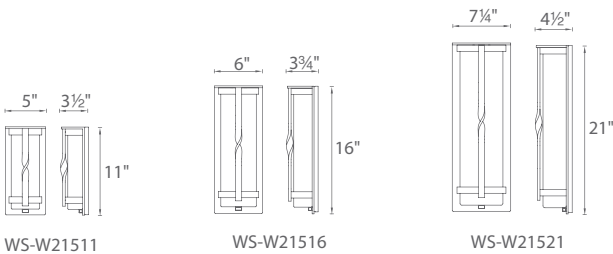

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W21511	11"	15.5W		674	370	BZ Bronze 
WS-W21516	16"	19.5W	120V	1062	555	
WS-W21521	21"	26.0W		1443	985	

Example: **WS-W21516-BZ**

Berkley

p.182




A WAC Lighting Company



# Twist


Dramatically illuminated curvature. A multi-dimensional metal wall sculpture captivates from various directions in luxurious exterior and interior environments. The fluid hardware reveals a beautiful play of light and shadow within and architectural wall grazing without.

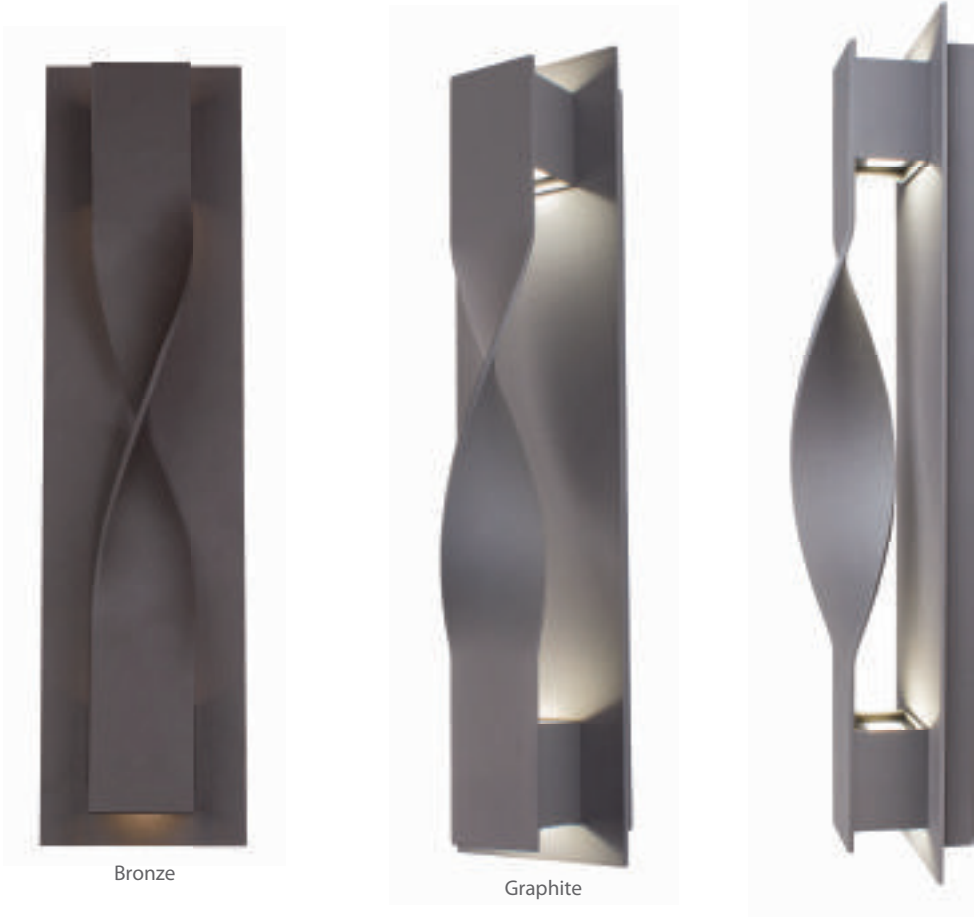

- Up and down light
- ETL & cETL wet location listed, IP65 rated
- ADA compliant, low profile design
- Up and down light
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W5620</b>	20"	16W	120V	960	260	<b>BZ</b> Bronze <b>GH</b> Graphite

Example: **WS-W5620-BZ**

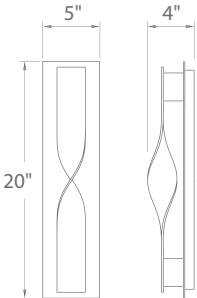

Twist

p.184



A WAC Lighting Company






# Digitus


A vertical illuminating element highlights the hand crafted qualities of this wall sconce design. The artistic represented wood grain lends an arts and crafts appeal to this unique sconce. Perfect for indoor and outdoor applications. The ADA design mounts in any orientation.



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Backlit wall bracket with sand cast back plate
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W33518</b>	17"	15W	120V	94	85	<b>ORB</b> Oil Rubbed Bronze 

Example: **WS-W33518-ORB**

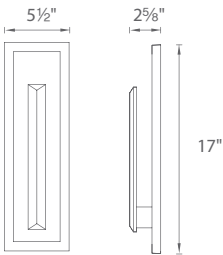

WS-W33518




# Oath


Bronze framed art glass becomes a simple but clever transitional wall sconce for both interiors and exteriors. With the warmth of natural elements, the Oath promises continuity across American architectural styles from prairie to saltbox to craftsman.



- Mount vertically or horizontally
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Aluminum construction with laminated glass
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W71618	18"	12W	120V	576	161	BZ Bronze 
WS-W71628	28"	36W		2094	586	

Example: **WS-W71618-BZ**  
For 277V special order, add an "F" before the finish: **WS-W71618F-BZ**

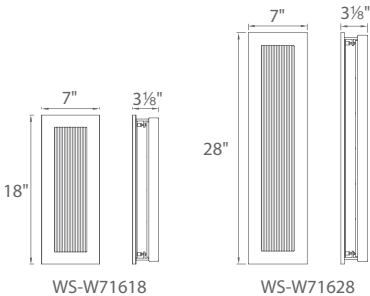



# Rain

Evoking an image of gentle rainfall, this Zen luminaire uses LED technology to highlight the clear seeded glass in a dark sky and ADA compliant sconce. Two finishes and two sizes are available for various interior and exterior applications.




Bronze



Graphite



- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with clear seeded glass
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

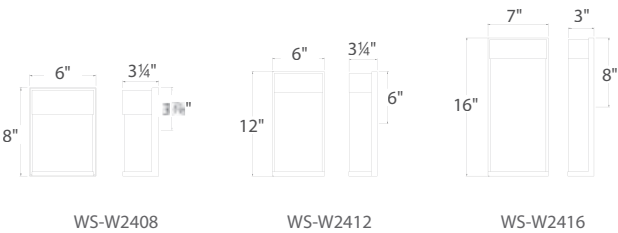

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2408	8"	8W	120V	215	145	BZ Bronze
WS-W2412	12"					GH Graphite
WS-W2416	16"					

Example: WS-W2416-BZ





# Hiline

The Hiline luminaire features a sealed LED housing and clean, versatile Dark Sky and ADA design. This functional design is ideal for showing off multi-tiered decks, stone patios or illuminating entry ways in luxury hotels and homes.



White



Black




Graphite




Bronze


- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction with etched glass light shield
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 277V option available for WS-W2308 & WS-W2312 *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85



WS-W2308



WS-W2312



WS-W2316

Model	Height	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W2308	8"					BK Black
WS-W2312	12"	8W	120V	280	245	BZ Bronze
WS-W2316	16"					GH Graphite
						WT White

Example: **WS-W2312-GH**


For 277V special order, add an "F" before the finish: **WS-W2312F-GH**






# Urban

Like urban renewal, this sconce gives new life to the conventional step baffle. Form follows function in this simplified indirect wall sconce. Clean styling and robust LED performance are combined in this modern dark sky luminaire.

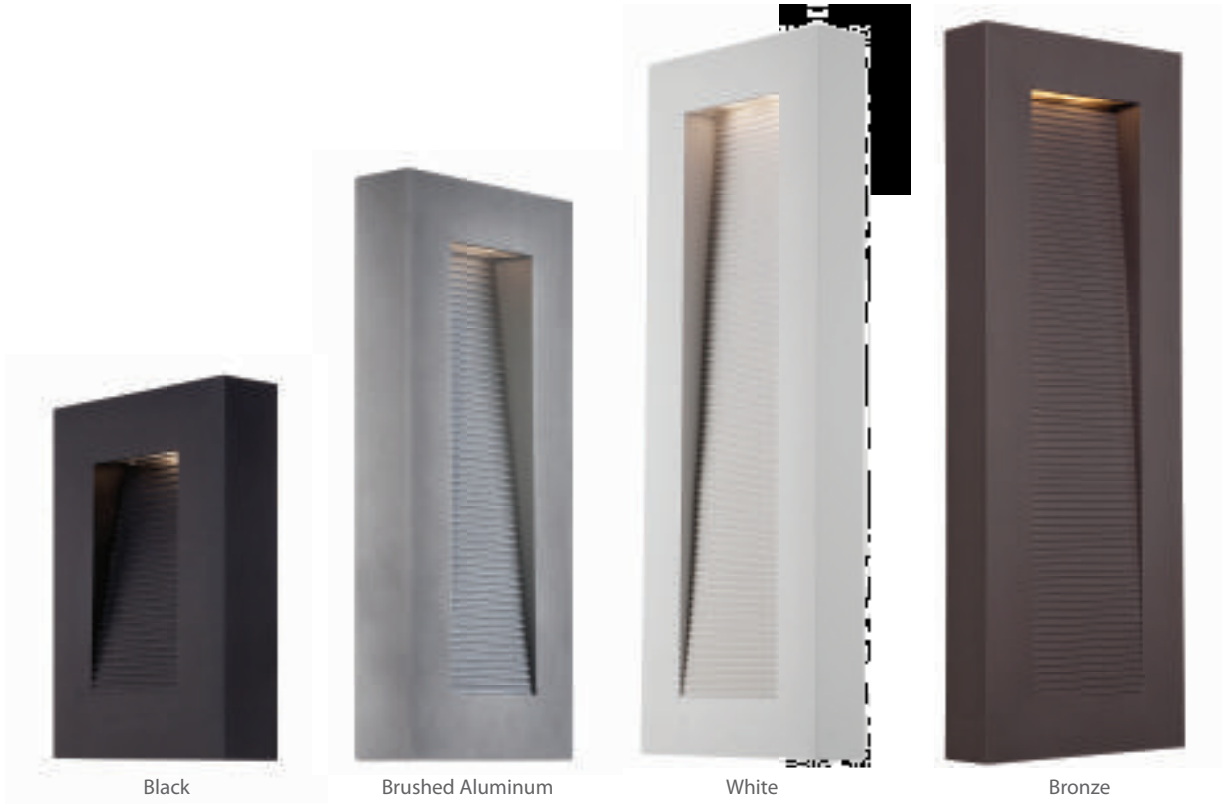

- ADA compliant, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Interior light and down light
- Aluminum construction
- No transformer or driver required
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

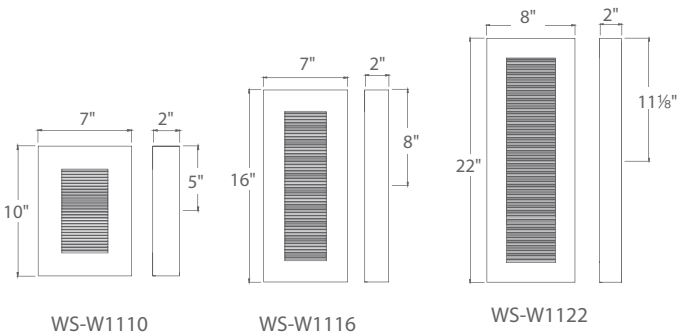

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W1110</b>	10"	12W	120V	720	370	<b>BK</b> Black
<b>WS-W1116</b>	16"	16W		960	490	<b>BZ</b> Bronze
<b>WS-W1122</b>	22"	20W		1200	610	<b>GH</b> Graphite
						<b>WT</b> White

Example: **WS-W1110-BK**  
For 277V special order, add an "F" before the finish: **WS-W1110F-BK**





# Mega

A purposeful asymmetrical wall mounted downlight design brightly illuminates walkways and provides security with an attractive simple architectural form.



Bronze




Graphite

- Luminaire may be rotated 180° when mounting
- ADA compliant for, low profile design
- ETL & cETL wet location listed, IP65 rated
- Dark Sky friendly
- Aluminum construction
- Full range dimming when used with compatible dimmers\*
- Driver located in inside fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>WS-W70612</b>	11"	25W	120V-220V-277V	845	610	<b>BZ</b> Bronze <b>GH</b> Graphite

Example: **WS-W70612-BZ**

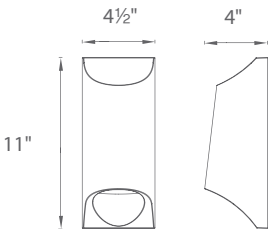



# Vessel

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.

Dark Sky Friendly




Brushed Aluminum

Up & Down Light



Bronze

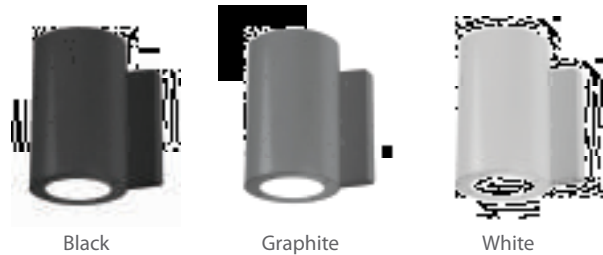


Black

Graphite

White

- Up & down light
- ADA compliant, low profile design
- ETL & cETL wet location listed, IP66 rated
- WS-W9101 is Energy Star® rated & Dark Sky Friendly
- Full range dimming when used with compatible dimmers\*
- Mounts in any direction
- Driver located inside fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90

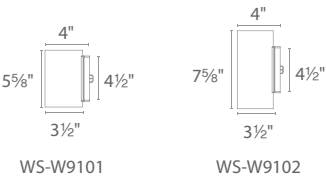

	Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
	Down Light	<b>WS-W9101</b>	16.5W	1167	860	<div><b>AL</b> Brushed Aluminum</div> <div><b>BK</b> Black</div> <div><b>BZ</b> Bronze</div> <div><b>GH</b> Graphite</div> <div><b>WT</b> White</div>
	Up & Down Light	<b>WS-W9102</b>	29W	2334	1610	

Example: **WS-W9101-AL**  
For 2700K add "-27"; 4000K add "-40" before the finish: **WS-W9102-40-BZ**  
[www.modernforms.com](http://www.modernforms.com)

\*Refer to specification sheet on [modernforms.com](http://modernforms.com)



# Bloc

Bold geometry and seamless forms with robust illumination for today's modern interiors and exteriors. Sleek die-cast aluminum construction reveals a silk-screened glass diffuser that renders upward and downward illumination. Also available for ceiling flush mounted luminaires, see pages 211-212.

Dark Sky Friendly




Black

Up & Down Light



Brushed Aluminum


- ETL & cETL wet location listed, IP66 rated
- WS-W9201 is Energy Star® rated & Dark Sky Friendly
- Listed for use in closets
- Driver located inside fixture
- Mounts in any direction
- Full range dimming when used with compatible dimmers\*
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90

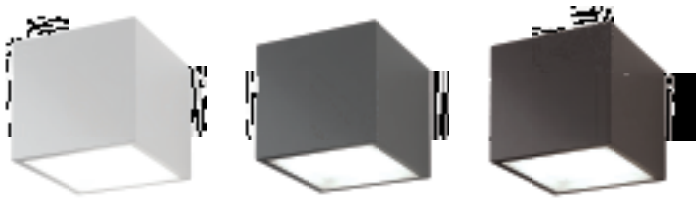



White

Graphite

Bronze




WS-W9201 / WS-W9202

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
	Down Light	<b>WS-W9201</b>	16.5W	1167	945
	Up & Down Light	<b>WS-W9202</b>	30.5W	2334	1930

**AL**  
**BK**  
**BZ**  
**GH**  
**WT**

Brushed Aluminum  
Black  
Bronze  
Graphite  
White



Example: **WS-W9202-GH**  
For 2700K add "-27"; 4000K add "-40" before the finish: **WS-W9201-40-WT**  
[www.modernforms.com](http://www.modernforms.com)

\*Refer to specification sheet on [modernforms.com](http://modernforms.com)








LED

Interior & Exterior  
Pendants & Flush Mounts



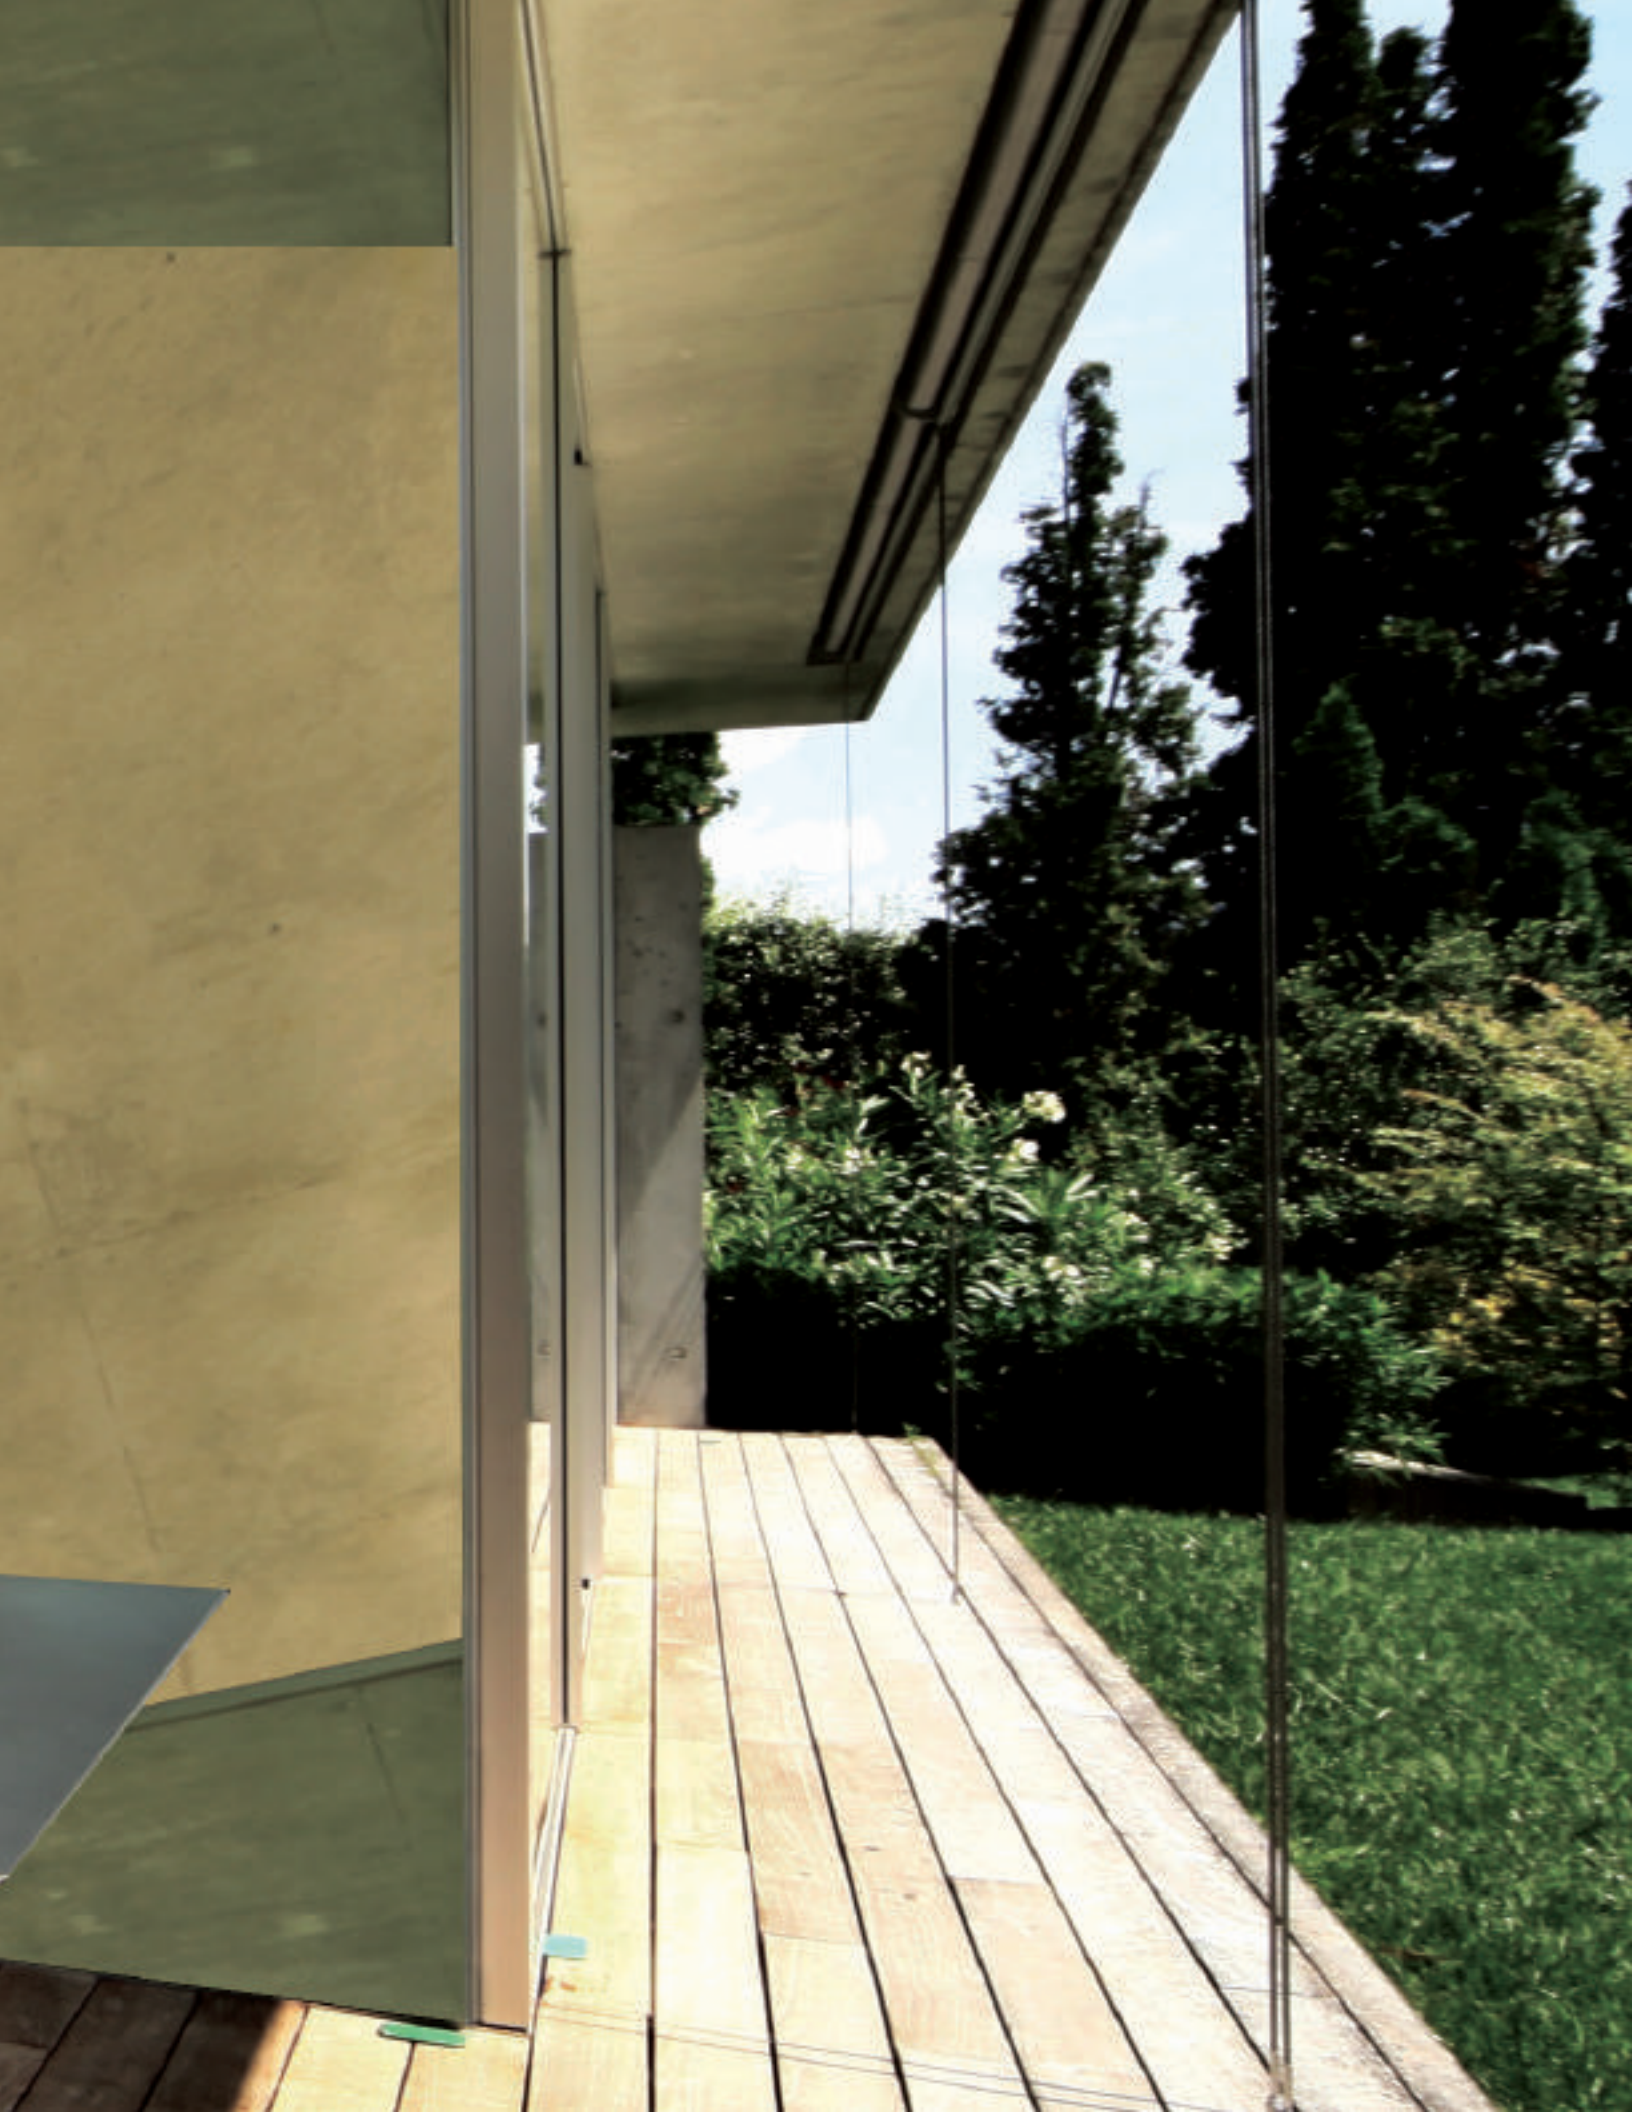

# Warlock

Commanding in its presence and the powerful way it dramatically illuminates spaces below. This imposing metal pendant is apposite for both interior and exterior spaces in either a brushed aluminum finish or bronze.



Graphite





Bronze

- All Aluminum construction
- ETL & cETL wet location listed, IP44 rated
- Full range dimming when used with compatible dimmers\*
- Dark Sky friendly
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-W99620</b>	18"	18W	120V-220V-277V	846	305	<b>GH</b> Graphite <b>BZ</b> Bronze

Example: **PD-W99620-GH**

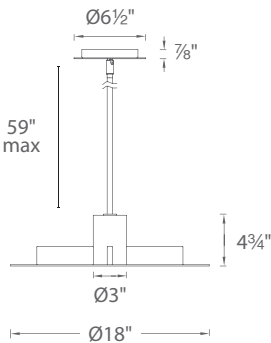

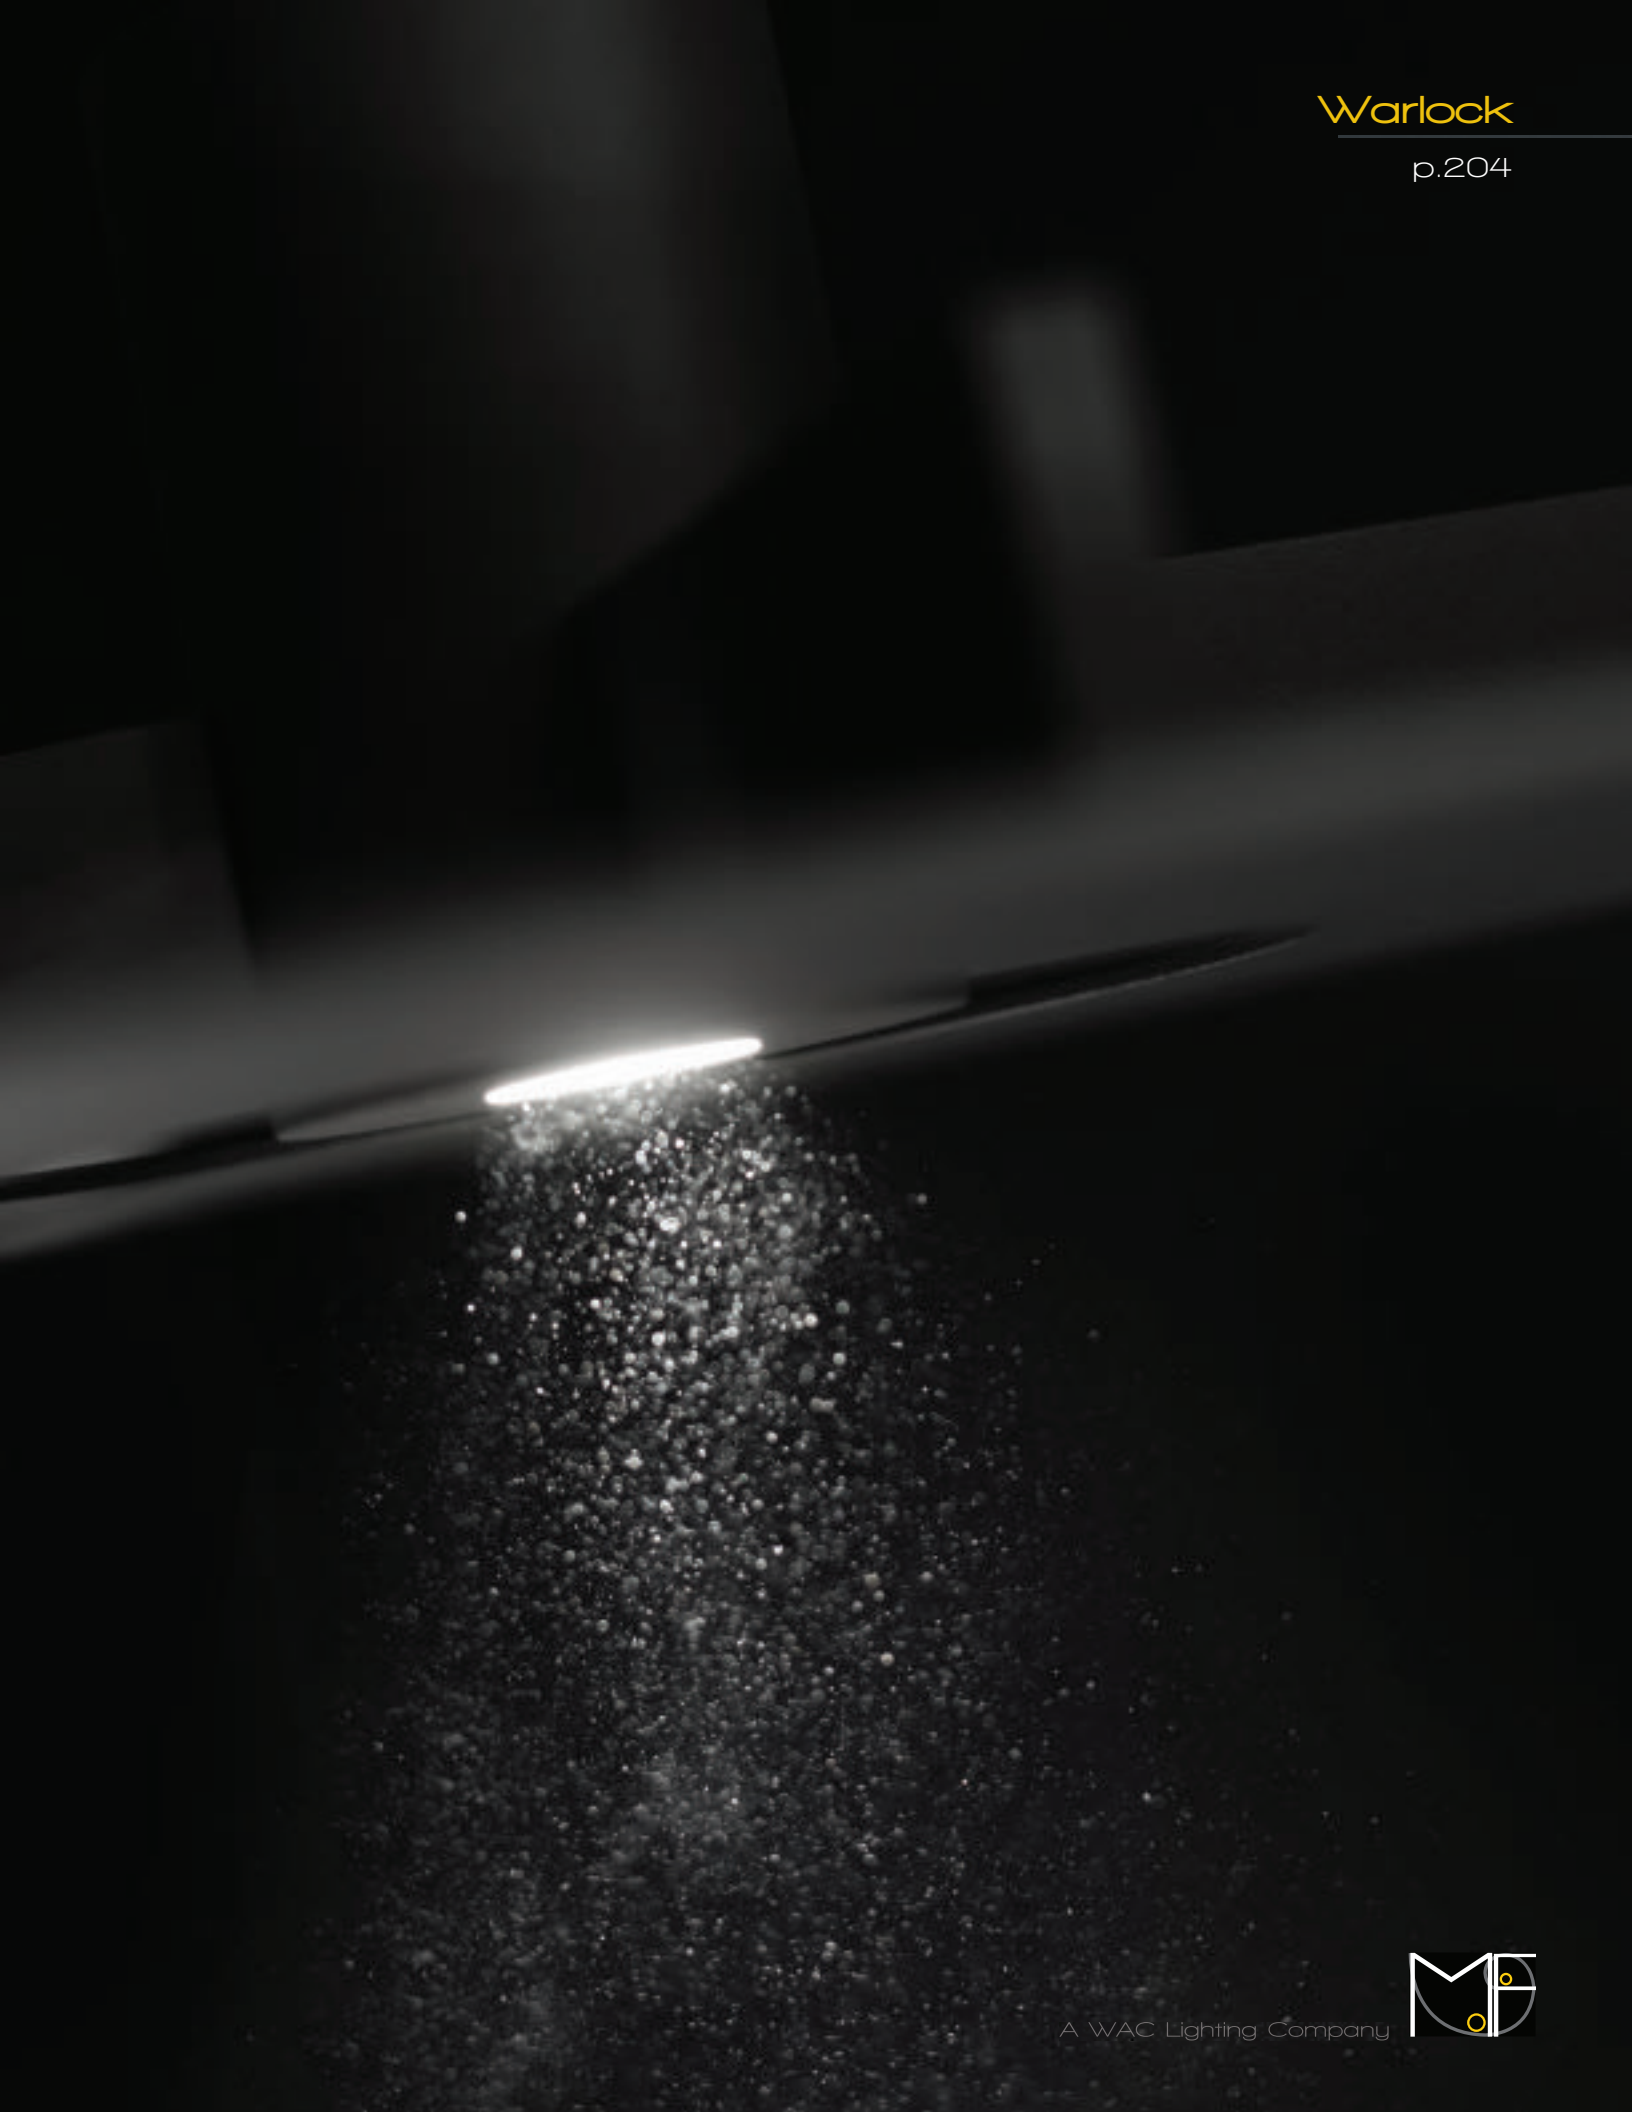



# Suspense


Giving the proverbial nod to tradition, it takes a powerful LED to pull off this look in a dark sky design. This contemporary lantern showcases a mouth blown clear glass element and is equipped with state of the art LEDs for a filament-free design.



- ETL & cETL wet location listed, IP65 rated
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- CEC Title 24 Compliant
- Dark Sky friendly
- Twist lock glass for minimal hardware
- Aluminum construction with a thick, mouth blown clear glass element
- Integral transformer in canopy
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- 50,000 hour potential life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	LED Lumens	Delivered Lumens	Finish
<b>PD-W1915</b>	10"	12W	722	677	<b>AL</b> Brushed Aluminum
					<b>BZ</b> Bronze

Example: **PD-W1915-AL**

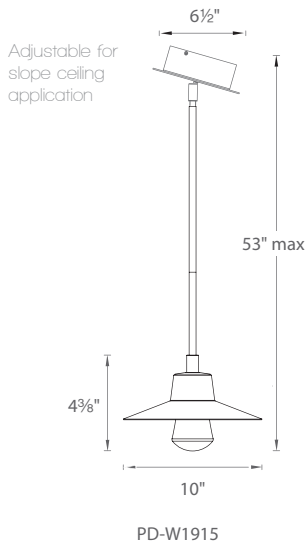

Suspense

p.206




# Lucid

A clearly defined orb gently encircles a cylinder of opal glass. Lucid is a clean and updated version of the traditional lantern. The pendant is available for cohesive specifications throughout upscale residential or hospitality commercial spaces. See pages 161-162 for coordinating wall sconces.




- See page 161-162 for wet rated interior & exterior wall sconce
- ETL & cETL wet location listed, IP65 rated
- Full range dimming when used with compatible dimmers\*
- Mouth blown clear etched opal glass
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- No transformer or driver required
- 277V option available *special order*
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Height	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-W74615</b>	14¾"	12W	120V	960	660	<b>BK Black</b> 

Example: **PD-W74615-BK**

For 277V special order, add an "F" before the finish: **PD-W74615F-BK**

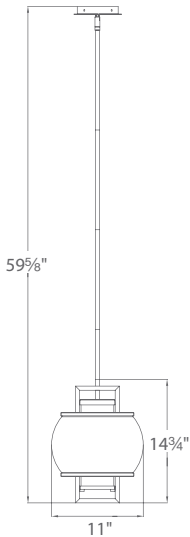



# Vessel

A sleek, minimalist profile supported by precision engineering using advanced proprietary LED technology. Integral reflectors ensure high performance optics for accent and wall wash lighting, pathway and facade illumination and building security.



Brushed Aluminum



White



Bronze



Black









Graphite

- Wall or ceiling mount
- ETL & cETL wet location listed, IP66 rated
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9100

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish	
	Flush Mount	<b>FM-W9100</b>	16.5W	1167	956	<b>AL</b> Brushed Aluminum 
						<b>BK</b> Black 
						<b>BZ</b> Bronze 
						<b>GH</b> Graphite 
						<b>WT</b> White 

Example: **FM-W9100-BK**  
For 2700K add "-27"; 4000K add "-40" before the finish: **FM-W9100-40-AL**





Brushed Aluminum



White



Bronze




Black




Graphite


- Wall or ceiling mount
- ETL & cETL wet location listed, IP66 rated
- Available in five architectural finishes
- CEC Title 24 Compliant
- Full range dimming when used with compatible dimmers\*
- Driver located in fixture
- Universal driver (120V-220V-277V)
- 60,000 hour rated life
- Color Temp: 3000K 2700K / 4000K available special order
- CRI: 90



FM-W9200

Type	Model	Wattage	LED Lumens	Delivered Lumens	Finish
	Flush Mount	<b>FM-W9200</b>	16.5W	1167	945
					<b>AL</b> Brushed Aluminum
					<b>BK</b> Black
					<b>BZ</b> Bronze
					<b>GH</b> Graphite
					<b>WT</b> White

For 2700K add "-27"; 4000K add "-40" before the finish: **FM-W9200-27-GH**




# Circa


Bright ambient illumination evokes from a clean, round white glass that fits perfectly into handsome finished hardware to match seamlessly with nearly any décor in residential and commercial settings. Advanced LED technology delivers high output and CRI.



- Illuminates evenly without hot spots or shadowing
- Wall or ceiling mount available
- ETL & cETL wet location listed, IP44
- ADA compliant, low profile design
- Listed for use in closets
- CEC Title 24 Compliant
- Replaceable LED module
- Transformer located in outlet box
- Full range dimming when used with compatible dimmers\*
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2115-30	14"	25W	120V	2355	1050	TT Titanium 

Example: **FM-2115-30-TT**  
For 277V special order, add an "F" before the color temperature: **FM-2115F-30-TT**








# Matrix

Designed and crafted with clean square geometric styling, this sleek and simple ceiling luminaire blends with any residential or commercial setting. Optimal LED illumination delivers uniform bright lighting in nearly any room. Smooth thick wall etched glass is complemented with a stunning new Titanium finish.




- Illuminates evenly without hot spots or shadowing
- Durable stamping aluminum canopy, with thick opal glass
- Wall or ceiling flush mount
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-2012-30	12"	25W	120V	2200	985	TT Titanium 

Example: **FM-2012-30-TT**

For 277V special order, add an "F" before the color temperature: **FM-2012F-30-TT**

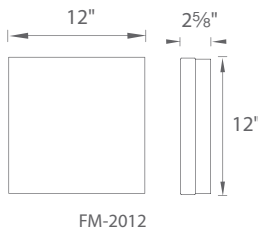



# Ledge

A luminous architectural profile and superior construction make this ceiling flush mount or wall sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Allows for cohesive specifications across residential and commercial interior and exterior applications. Also available as a wall luminaire in various lengths. See pages 33, 35 and 117.



Brushed Aluminum

- ETL & cETL wet location listed, IP65 rated
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-1410</b>	8"	17W	120V	1104	750	<b>AL</b> Brushed Aluminum
<b>FM-1414</b>	14"	38W		2772	1475	<b>BK</b> Black
						<b>BZ</b> Bronze
						<b>GH</b> Graphite

Example: **FM-1414-AL**




Bronze



Graphite



Black

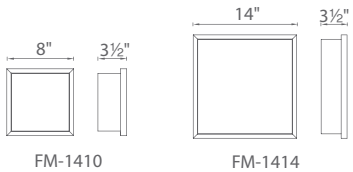





LED

Interior  
Pendants, Chandeliers  
& Flush Mounts







# Tango


Rhythmic beats reverberate in a dramatic larger than life pendant. A luxuriously cinched drum design carefully adorned in gold leaf or silver leaf and thinly lacquered for a lustrous matte finish. Tango is simple made sexy.



- ETL & cETL damp location listed
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers\*
- 85,000 hour potential life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-34620	20"	41	120V-220V-277V	2400	1192	<div><div>GL Gold Leaf</div><div>SL Silver Leaf</div></div>

Example: PD-34620-GL

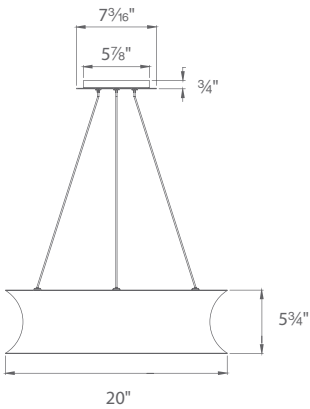

Tango

p.222



# Marimba

New 24" Size

Percussion perfection. This extraordinary cluster of seven LED luminaires, each delivering generous diffused illumination, transforms into a state-of-the-art chandelier. Custom LED modules provide high quality lumens and dimming control. Hand finished with a stunning dark bronze and gold leaf or white and silver leaf. Now also available as a 24" pendant with overstated proportions for a grand statement.




Silver Leaf/White



Gold Leaf/Dark Bronze

- ETL & cETL damp location listed
- Twist lock glass inside
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

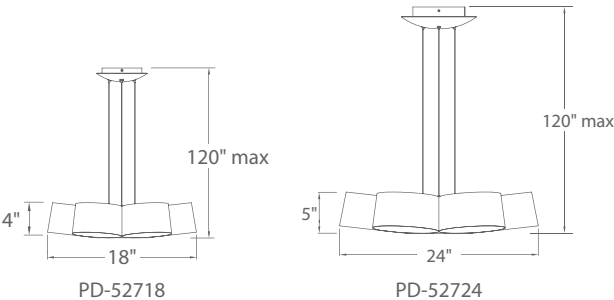


Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	Canopy-Interior/Exterior
PD-52718	18"	55W	120V	2885	1255	GL	Gold Leaf/Dark Bronze
PD-52724	24"	59W		3755	1395	SL	Silver Leaf/White

Example: PD-52718-GL

Marimba

p.224

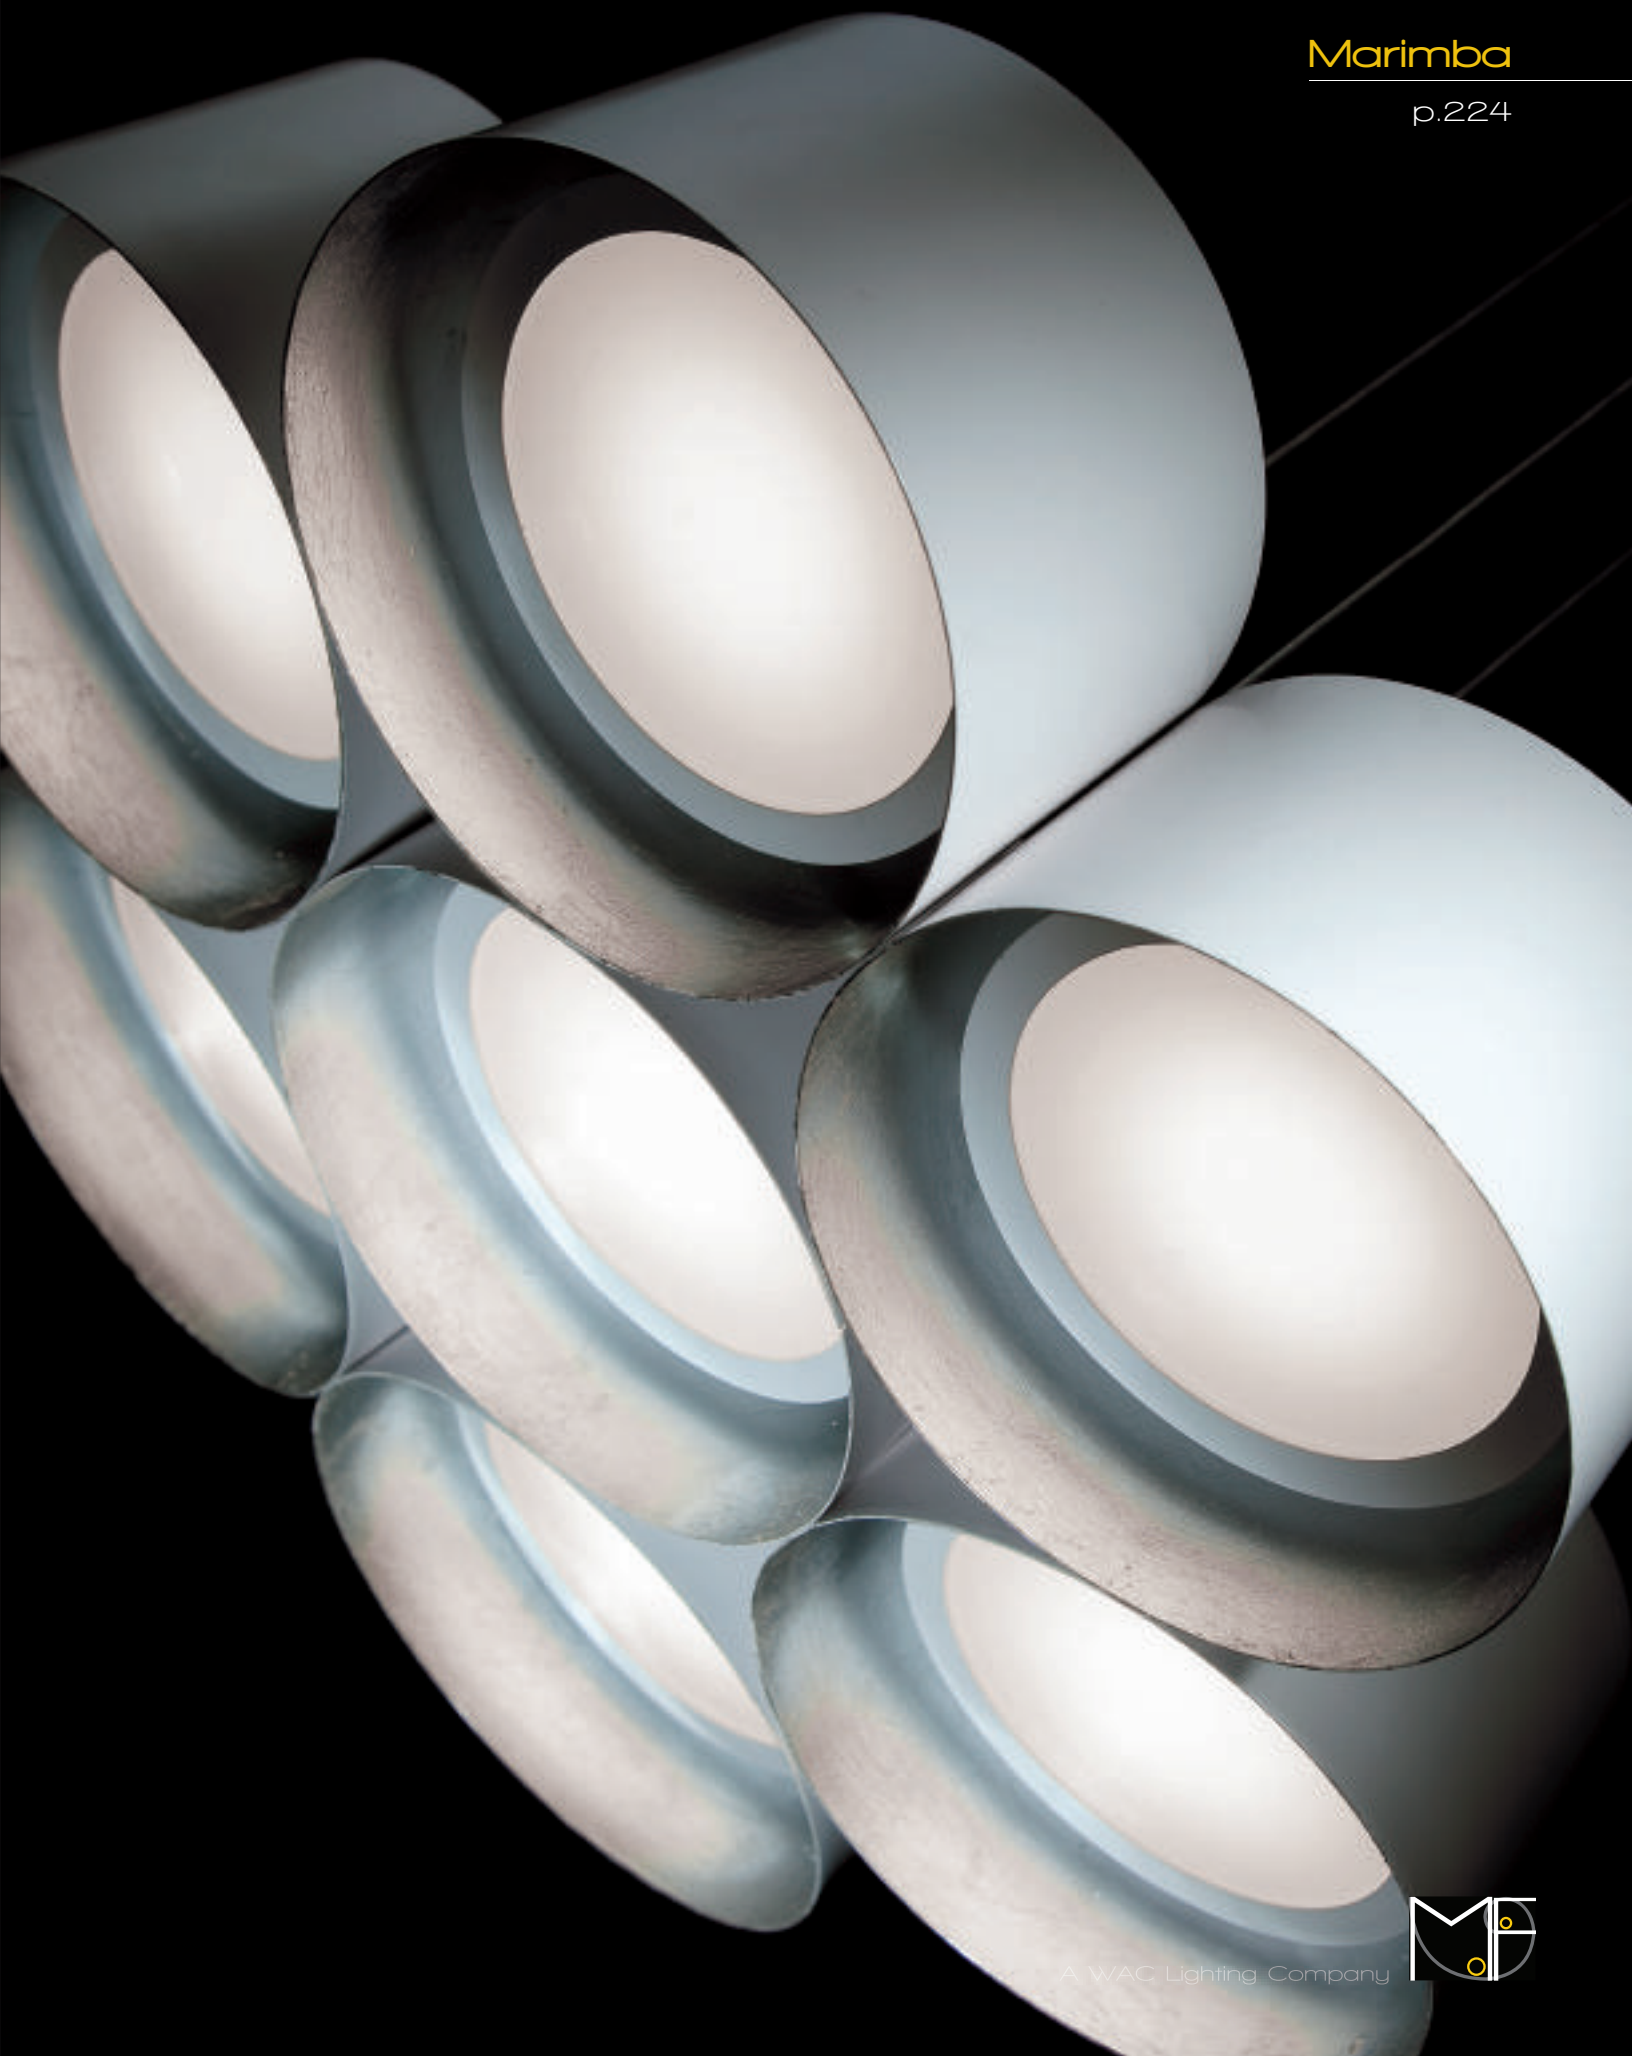


A WAC Lighting Company





# Gilt

A modern medallion glows above from LEDs lighting upward from the pendant while concealed down lighting delivers perfect illumination on tabletops and surfaces below. Hand finished in dark bronze with gold leaf interior or white with silver leaf interior for an opulent textured appeal.

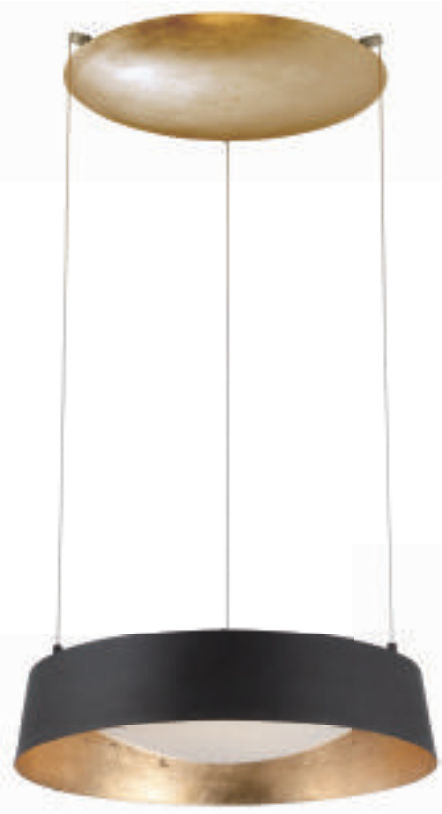

Gold Leaf/Dark Bronze




Silver Leaf/White

- ETL & cETL damp location listed
- Up & down lights
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish	Canopy-Interior/Exterior
PD-51318	18"	52W	120V	4050	1190	GL SL	Gold Leaf/Dark Bronze Silver Leaf/White


Example: PD-51318-SL

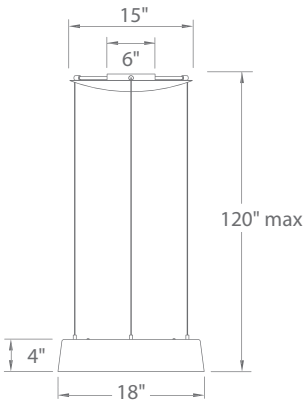




# Blaze


A radiating spectacle of warm indirect illumination from hand applied gold leaf. Offered in three proportional sizes to design in multiples on walls or ceilings.



WS-30612

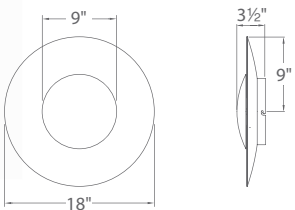

WS-30618

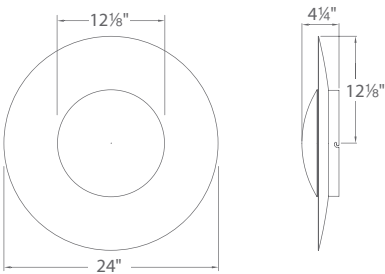


WS-30624

- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design in WS-30612, WS-30618
- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-30612	12"	10.5W	120V-220V-277V	787	250	GL Gold Leaf/Gold Plated SL Silver Leaf/Polished Nickel
WS-30618	18"	25W		1979	605	
WS-30624	24"	31W		2393	700	

Example: WS-30612-GL

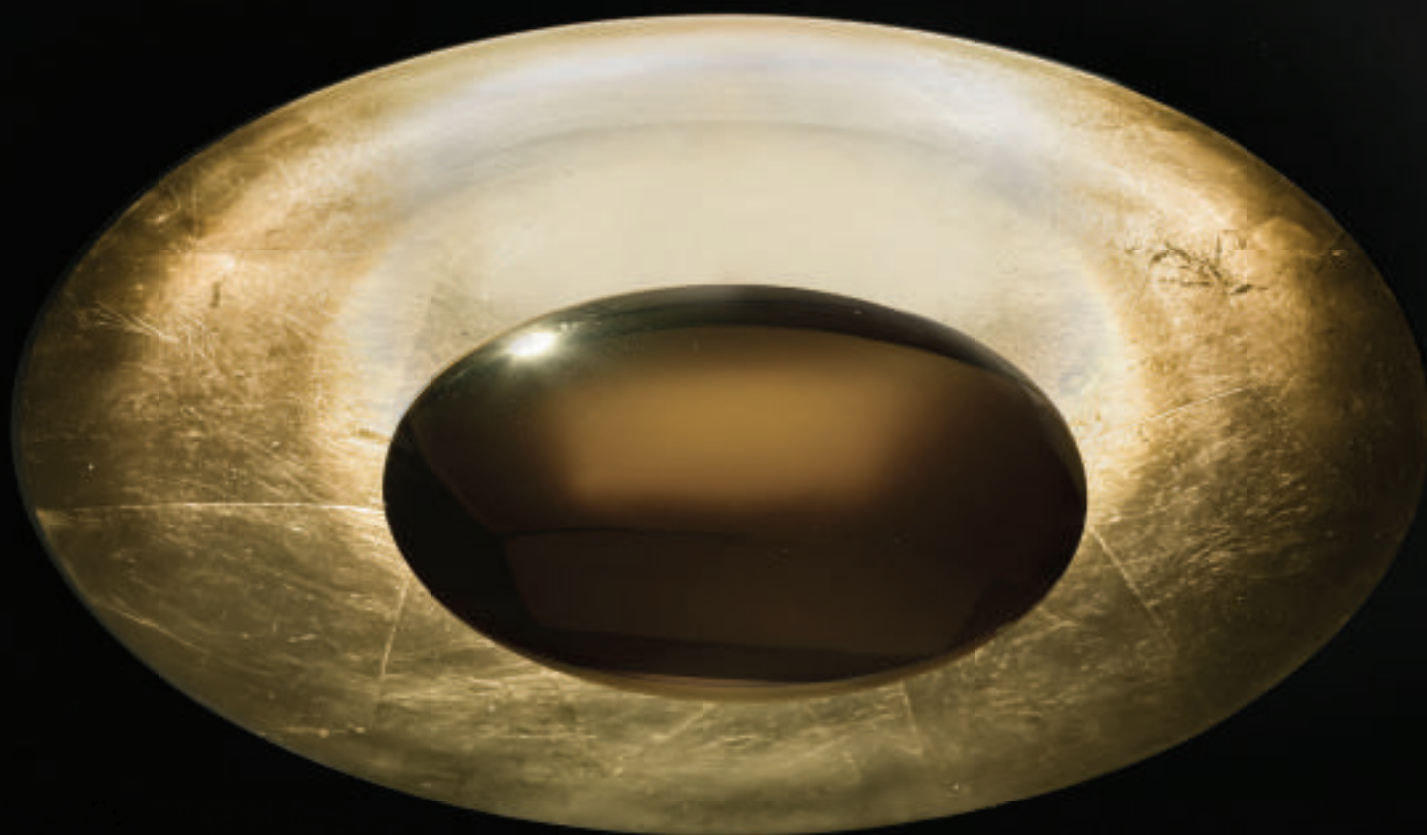



# BDSM


Leather-bound luxury and control. Designed with handsome vintage black or white leather and clean styling, this unique linear LED pendant is the perfect complement to an executive office. A thin streamlined profile conceals robust LED down lighting with cutting edge full-range dimming controllability.

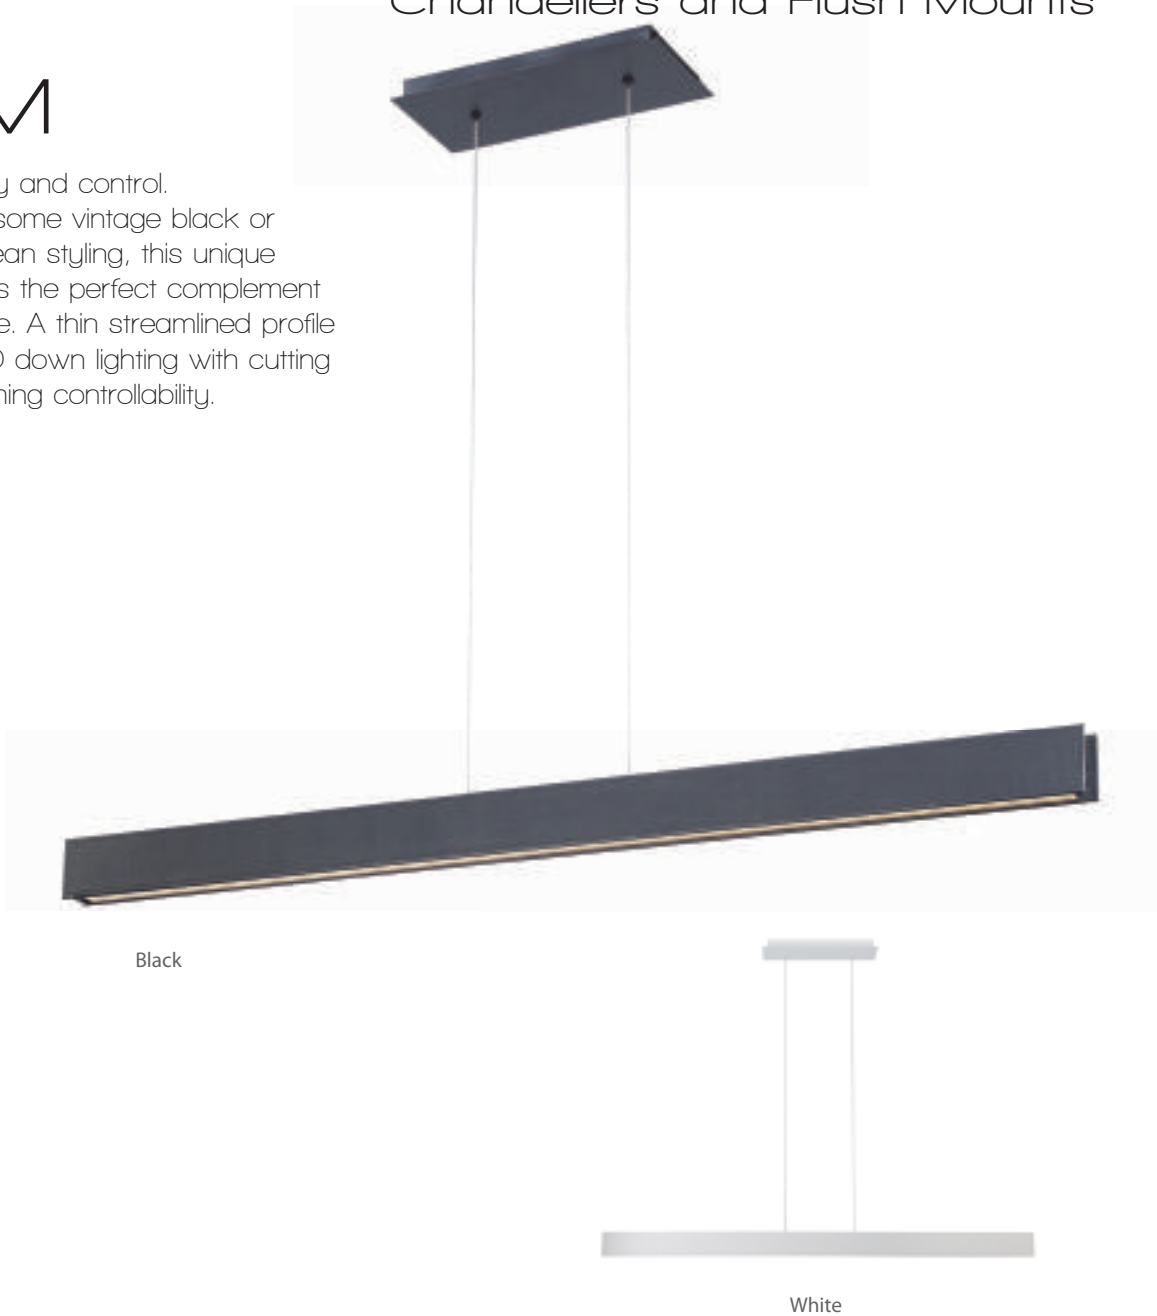

- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-51542</b>	42"	49W	120V	3750	1700	<b>BK</b> Black  <b>WT</b> White 

Example: **PD-51542-WT**

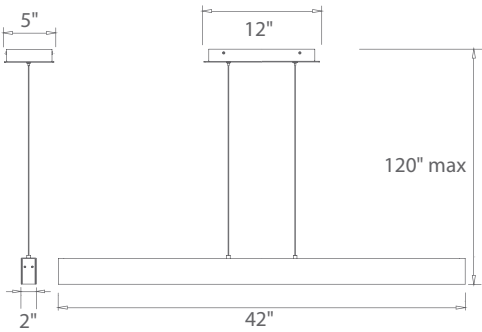





# Davos


A modern work of art. The sleek LED design in an ultra-thin profile and automotive gloss finishes balances cutting-edge style and substance. Destined to become a recognizable icon that astonishes.



- ETL & cETL damp location listed
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- Replaceable LED module
- 70,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-51645</b>	45"	49W	120V	3750	1700	<b>EB</b> <i>Ebony Black</i>
						<b>FR</b> <i>Ferrari Red</i>
						<b>PW</b> <i>Pearl White</i>
						<b>TT</b> <i>Titanium</i>

Example: **PD-51645-EB**

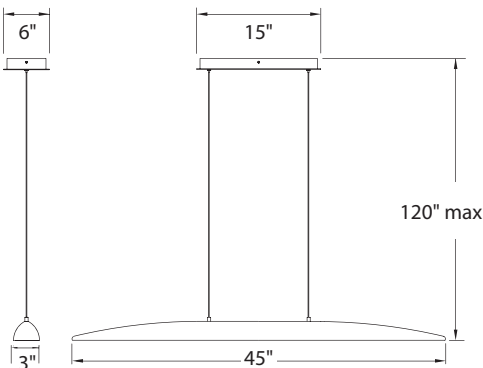




# Acid

Surrealistic droplets of metallic liquid artfully suspended. Powerful LED downlights concealed within these chrome-plated metal shades provide functional illumination comparable to halogen MR16s. String individually or drop them in clusters for the full mind-blowing experience.




- ETL & cETL damp location listed
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers\*
- 70,000 hour potential life
- Color Temp: 3000K
- CRI: 90




PD-15604




PD-64608



PD-61610

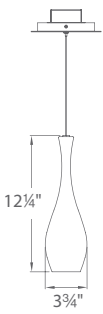

PD-66612

Model	Wattage	LED Lumens	Delivered Lumens	Finish
PD-15604	11W	640	485	PN Polished Nickel 
PD-64608		690	580	
PD-61610		670	495	
PD-66612		665	490	

Example: PD-15604-PN

ACID

p.234



A WAC Lighting Company







# Magic

Gloriously sparkly stalks of Piastra crystal alluringly remarkable both as a slender, individual pendant or as a 21-light chandelier with customizable proportions.



- See pages 61-62 for complementary 1 light & 2 light sconces
- Cylindrical crystalized art glass shade
- ETL & cETL damp location listed
- Driver located in canopy
- Universal driver (120V-220V-277V)
- Cylindrical crystalized art glass shade
- Full range dimming when used with compatible dimmers\*
- 75,000 hour potential life
- Color Temp: 3000K
- CRI: 90

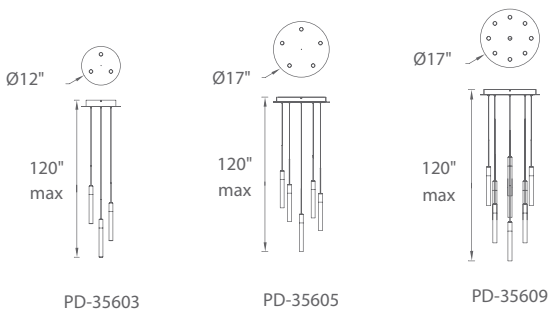


Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35603	3 lights	16.5W		673	620	PN Polished Nickel 
PD-35605	5 lights	26.5W	120V-220V-277V	1122	1033	
PD-35609	9 lights	47.5W		2020	1858	


Example: PD-35603-PN



PD-35615

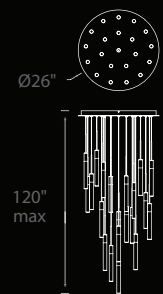

PD-35621

Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-35615</b>	15 lights	79.5W	120V-220V-277V	3366	3097	<b>PN</b> Polished Nickel 
<b>PD-35621</b>	21 lights	110W		4713	4336	


Example: **PD-35615-PN**

# Magic


Gloriously sparkly stalks of Piastra crystal alluringly remarkable both as a slender, individual pendant or as a 21-light chandelier with customizable proportions.




- See page 61-62 for complementary 1 light & 2 light sconces
- Cylindrical crystalized art glass shade
- ETL & cETL damp location listed
- Driver located in canopy
- Universal driver (120V-220V-277V)
- Cylindrical crystalized art glass shade
- Full range dimming when used with compatible dimmers\*
- 75,000 hour potential life
- Color Temp: 3000K
- CRI: 90


Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-35601	1 light	5.5W	120V-220V-277V	225	207	PN Polished Nickel 

Example: PD-35601-PN

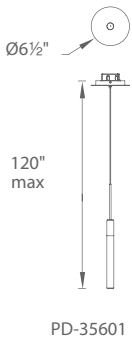


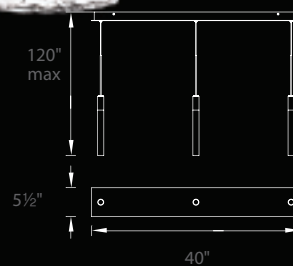

PD-35603L

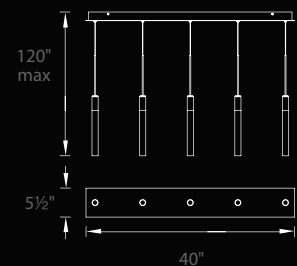

PD-35605L

Model	# of lights	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-35603L</b>	3 linear	16.5W	120V-220V-277V	673	620	<b>PN</b> Polished Nickel 
<b>PD-35605L</b>	5 linear	26.5W		1122	1033	

Example: **PD-35603L-PN**

# Soleil

Old world craftsmanship embraces modern aesthetics. An oversized medallion of Piastra art glass illuminated from within a spun metal frame of striking finishes for an incomparable designer look.



Light Bronze



White




Brushed Nickel

- ETL & cETL damp location listed
- Piastra glass diffuser
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>PD-51418</b>	18"	28W	120V	2025	770	<b>BN</b> Brushed Nickel <b>LB</b> Light Bronze <b>WT</b> White

Example: **PD-51418-LB**

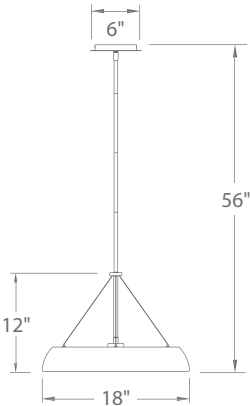





# Ethereal


Capturing your imagination and fulfilling dreams, this striking pendant appears lighter than its volume implies. Designed with mouth blown clear glass and an intricately detailed Piastra glass insert that illuminates with energy efficient LEDs for beautiful ambience.



- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers\*
- Transformer located in canopy
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-51218	18"	9W	120V	625	405	AL Brushed Aluminum

Example: PD-51218-AL

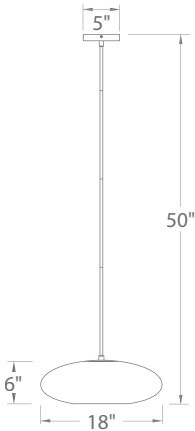

Ethereal

p.242




# Swing

A playful swing. Creative application of LED technology and luminaire design sparkle in a chrome framed multi-faceted block of art glass. Suspend in multiples over a bar or counter to make a dramatic statement.

- CEC Title 24 Compliant
- ETL & cETL damp location listed
- Up & down light
- Hang straight swivel
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Full range dimming when used with compatible dimmers\*
- Replaceable LED module
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-52512	5"	11W	120V	830	535	CH Chrome

Example: PD-52512-CH

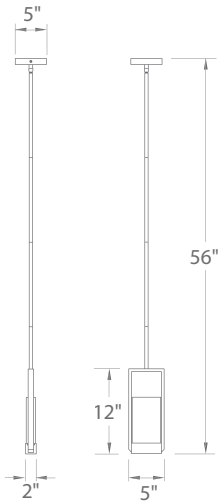









# Punk

Modern with a slight edge. Punk orbs combine shiny chrome with soft opal glass in a variety of sizes. Simple to incorporate and endure the test of time.



- See page.247 for complementary flush mount & wall sconces
- ETL & cETL damp location listed
- Hang straight swivel
- CEC Title 24 Compliant
- Mouth blown etched opal glass
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available).
- Driver located in outlet box
- Universal driver (120V-220V-277V)
- Full range dimming when used with compatible dimmers\*
- 50,000 hour potential life
- Color Temp: 3000K
- CRI: 90

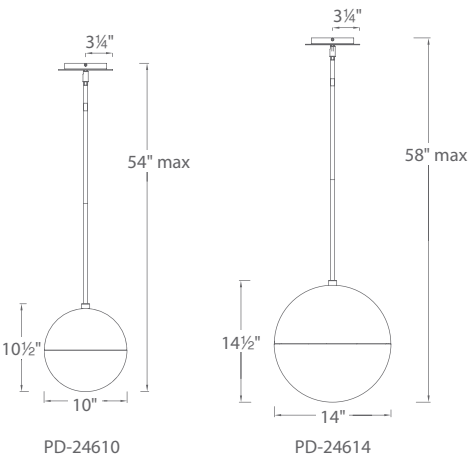

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
PD-24610	10"	18W	120V-220V-277V	1451	758	PN Polished Nickel 
PD-24614	14"	30W		2527	1563	

Example: PD-24610-PN

Punk




A WAC Lighting Company

# Punk

Half empty or half full. Punk orbs combine shiny chrome with soft opal glass in a variety of sizes and coordinating flush mounts or sconces. Simple to incorporate and endure the test of time.



- Wall or ceiling mount available
- ETL & cETL damp location
- CEC Title 24 Compliant
- Aluminum construction with mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- Listed for use in closets
- No transformer or driver required
- 277V option available *special order*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90


Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-12306</b>	6"	9.5W	120V	800	680	<b>PN</b> Polished Nickel 
<b>FM-12309</b>	9"	18W		1600	1428	

Example: **FM-12306-PN**

For 277V special order, add an "F" before the color temperature: **FM-12306F-PN**



FM-12306



FM-12309




# Loft


Understated simplicity and versatility to complement a broad range of interior schemes. Streamlined opal glass diffusers and fashionable back plates epitomize a polished aesthetic and contemporary design for baths and hallways.




- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design
- ETL & cETL damp location listed
- Mouth blown etched opal glass
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 60,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-3610</b>	10"	21W	120V	1350	585	<b>WT</b> White 
<b>FM-3615</b>	15"	28W		2025	880	

Example: **FM-3610-WT**



FM-3610

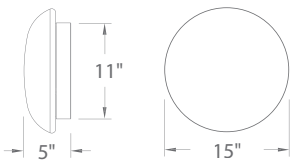

FM-3615







# Dune

A luminous centerpiece for any room. Mouth blown etched opal glass with an intriguing subtle profile. Perfect for wall and ceiling illumination. Full range dimming control. Available in two sizes.



- Wall or ceiling mount
- ETL & cETL damp location listed
- Transformer located in outlet box
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

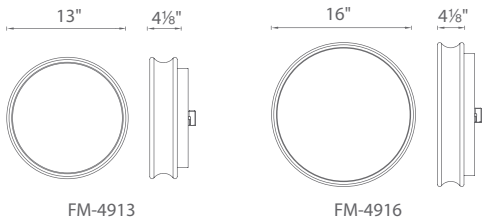

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-4913</b>	13"	26.5W	120V	1400	880	<b>BN</b> Brushed Nickel 
<b>FM-4916</b>	16"	31W		1573	1085	

Example: **FM-4916-BN**




# Circa

Bright ambient illumination evokes from a clean, round white glass that fits perfectly into handsome finished hardware to match seamlessly with nearly any décor in residential and commercial settings. Advanced LED technology delivers high output and CRI.




- Illuminates evenly without hot spots or shadowing
- Wall or ceiling mount available
- ETL & cETL wet location listed, IP44
- ADA compliant, low profile design
- Listed for use in closets
- CEC Title 24 Compliant
- Replaceable LED module
- Transformer located in outlet box
- Full range dimming when used with compatible dimmers\*
- 277V option available special order
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-2111-30</b>	11"	31W	120V	1635	940	<b>TT</b> Titanium 
<b>FM-2115-30</b>	14"	25W		2355	1050	

Example: **FM-2111-30-TT**

For 277V special order, add an "F" before the color temperature: **FM-2111F-30-TT**

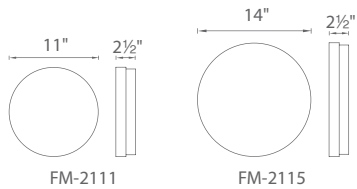






# Sprocket


Scalloped pressed glass acid etched in soft white.  
A ceramic white interior ensures even illumination.  
Low profile design dims beautifully and renders  
exquisite color with extended life.



- Illuminates evenly without hotspots or shadowing
- Wall or ceiling mount
- Damp location listed
- Transformer located in outlet box
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- 277V option available special order
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Diameter	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-4812-30</b>	12"	31W	120V	1646	1085	<b>BN</b> <i>Brushed Nickel</i> 

Example: **FM-4812-30-BN**  
For 277V special order, add an "F" before the color temperature: **FM-4812F-30-BN**






# Matrix

Designed and crafted with clean square geometric styling, this sleek and simple ceiling luminaire blends with any residential or commercial setting. Optimal LED illumination delivers uniform bright lighting in nearly any room. Smooth thick wall etched glass is complemented with a stunning new Titanium finish.




- Illuminates evenly without hot spots or shadowing
- Durable stamping aluminum canopy, with thick opal glass
- Wall or ceiling flush mount
- ETL & cETL damp location listed
- ADA compliant, low profile design
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- Replaceable LED module
- 277V option available special order
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 90

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FM-2009-30</b>	9"	31W	120V	1376	910	<b>TT</b> Titanium 
<b>FM-2012-30</b>	12"	25W		2200	985	

Example: **FM-2009-30-TT**

For 277V special order, add an "F" before the color temperature: **FM-2009F-30-TT**

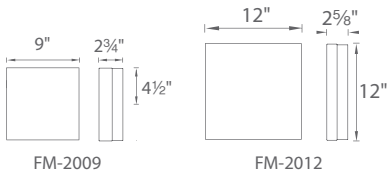



# Razor

A matching complement to the family of Razor LED wall luminaires, this impressive flush mount provides bright and beautiful lighting for task and general applications in residential and hospitality environments. Thick walled glass enhanced with detailed crosshatch metal hardware also works well as an ADA sconce.




Bronze



Stainless Steel

- ADA compliant when mounted on walls
- ETL & cETL damp location listed
- CEC Title 24 Compliant
- Listed for use in closets
- Full range dimming when used with compatible dimmers\*
- No transformer or driver required
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 90

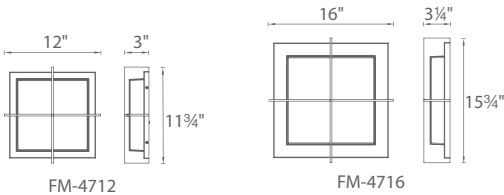

Model	Width	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FM-4712	12"	21.5W	120V	1560	725	BZ Bronze
FM-4716	16"	40W		2800	1160	SS Stainless Steel

Example: **FM-4712-SS**





# Neo


Marvel at this ultra-thin flush mount/sconce collection which adapts the latest technology from the television and display industry, to create phenomenal light output from a half inch deep luminaire. The amazing uniform light is free from glare, hot spots and color-over-angle changes.



- See pages 31-32 for complementary linear sconces or vanities
- ETL & cETL damp location listed
- Flush mounts to ceiling or wall as sconce
- ADA compliant, low profile design
- Full range dimming when used with compatible dimmers\*
- Transformer located in outlet box
- 50,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Width	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
FM-3712	12"	25W	120V	1940	1135	AL Brushed Aluminum


Example: FM-3712-AL





# LED Task



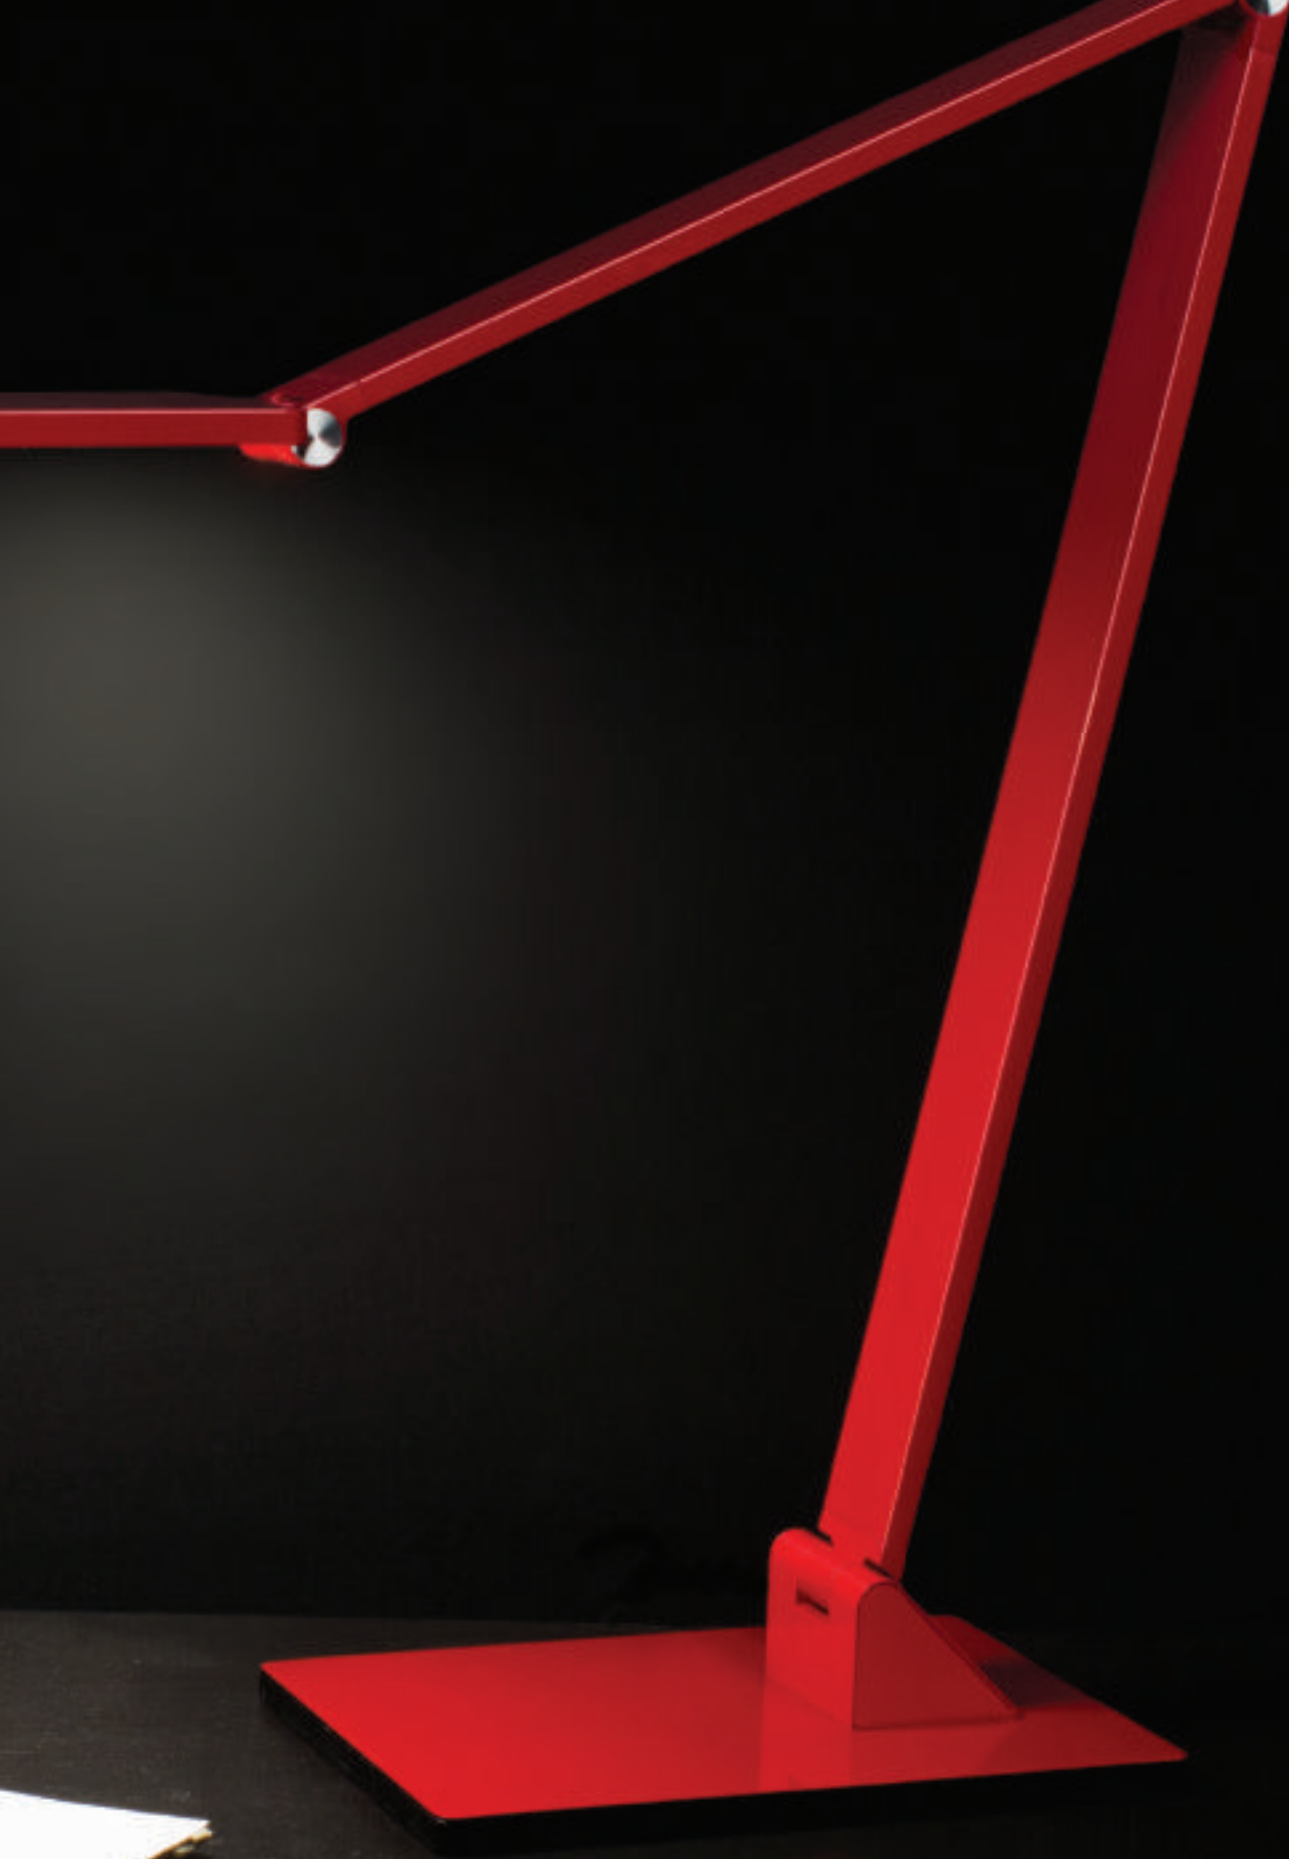



# Disc

Inspired by the sense of balance and stability of the well-rounded. The high-tech LED luminaire features a simple fingertip touch dimmer at the base for ease and convenience, staying true to its style.



- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1610	12W	120V-220V	780	624	AL Brushed Aluminum
					BK Black
					FR Ferrari Red

Example: TL-1610-BK



# Boxie

Minimalism as an art form. This modern task light adjusts smoothly and easily with grace and sophistication while integrating an LED module and movable arm. Dimming is easy with a fingertip touch dimmer. Perfect for reading and other task applications.



- Damp location listed
- Fingertip touch dimming
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1210	12W	120V	900	815	AL Brushed Aluminum
					BK Black
					FR Ferrari Red

Example: TL-1210-BK



# Suspension

A progressive design reminiscent of suspension bridges, cranes and levers. The Suspension task lamp performs with a 180 degree adjustable arm with high powered LED module, and features both a simple fingertip touch dimmer at the base and a USB power connector that enables you to recharge accessories.



- Built-in USB charging outlet
- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>TL-1710</b>	12W	120V-220V	230	212	<b>TT</b> <i>Titanium</i> <b>BK</b> <i>Black</i>


Example: **TL-1710-TT**





# Suspension


A progressive design reminiscent of suspension bridges, cranes and levers. The Suspension floor lamp features a 180 degree adjustable arm with high powered LED module and a conveniently located fingertip touch dimmer.

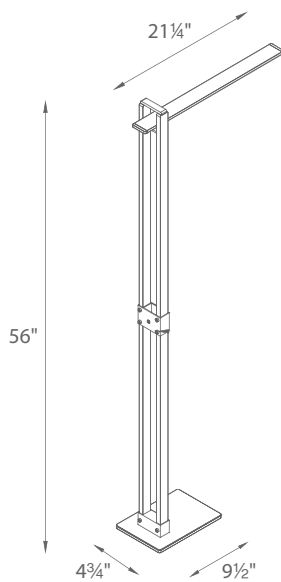

- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FL-1750</b>	14W	120V-220V	268	255	<b>TT</b> Titanium <b>BK</b> Black


Example: **FL-1750-TT**

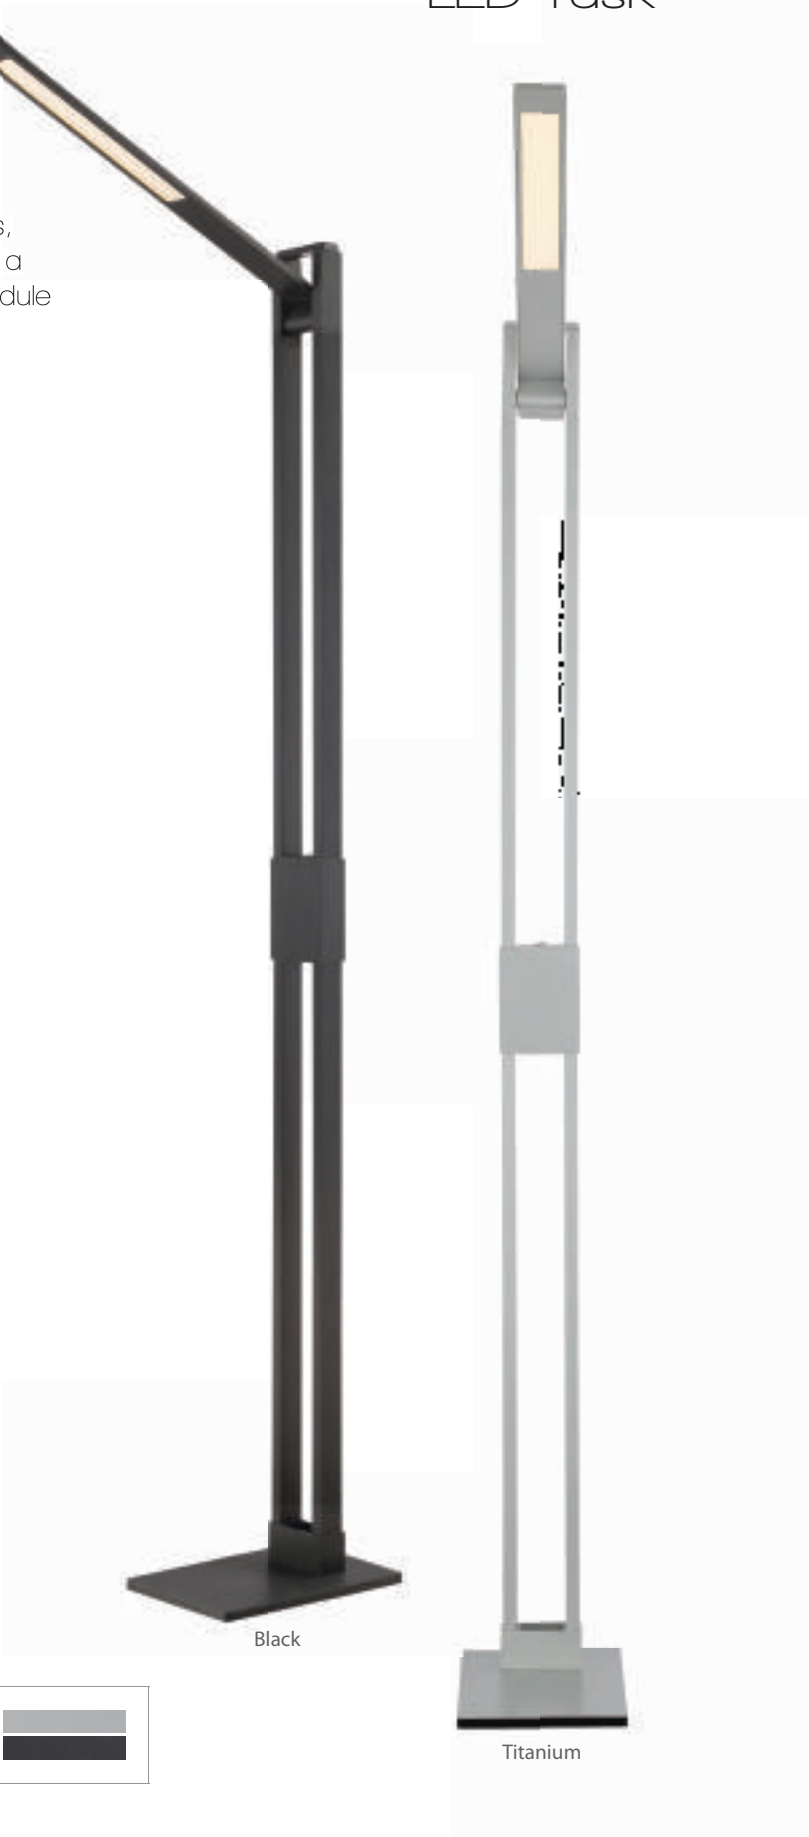



# Dove


A peaceful simple folded form transformed into a lovely modern task light. The adjustable head with high powered LEDs provide functional lighting, and features both fingertip touch dimmer and USB power connector at the base.

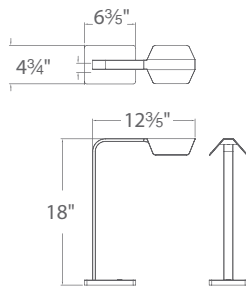

- Built-in USB charging outlet
- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85




Black

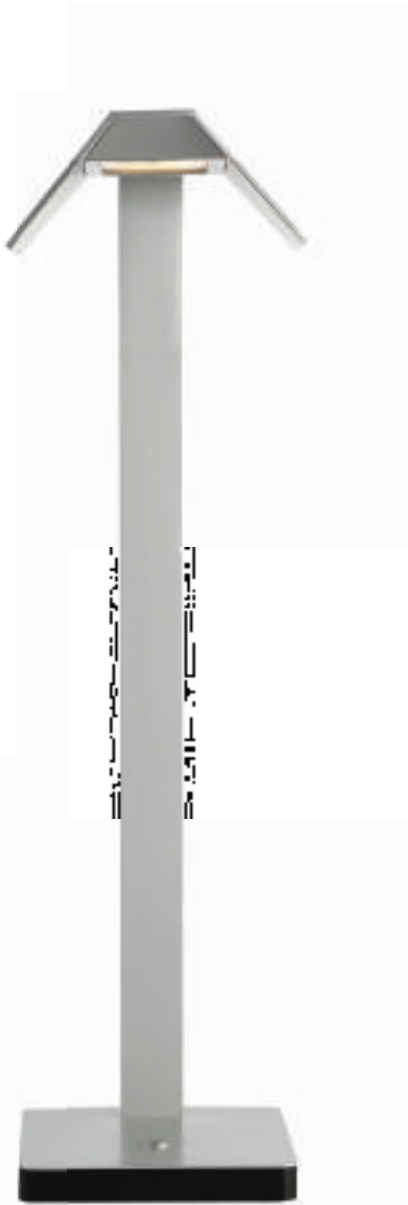

Titanium

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>TL-1510</b>	12W	120V-220V	500	454	<b>TT</b> Titanium <b>BK</b> Black


Example: **TL-1510-TT**

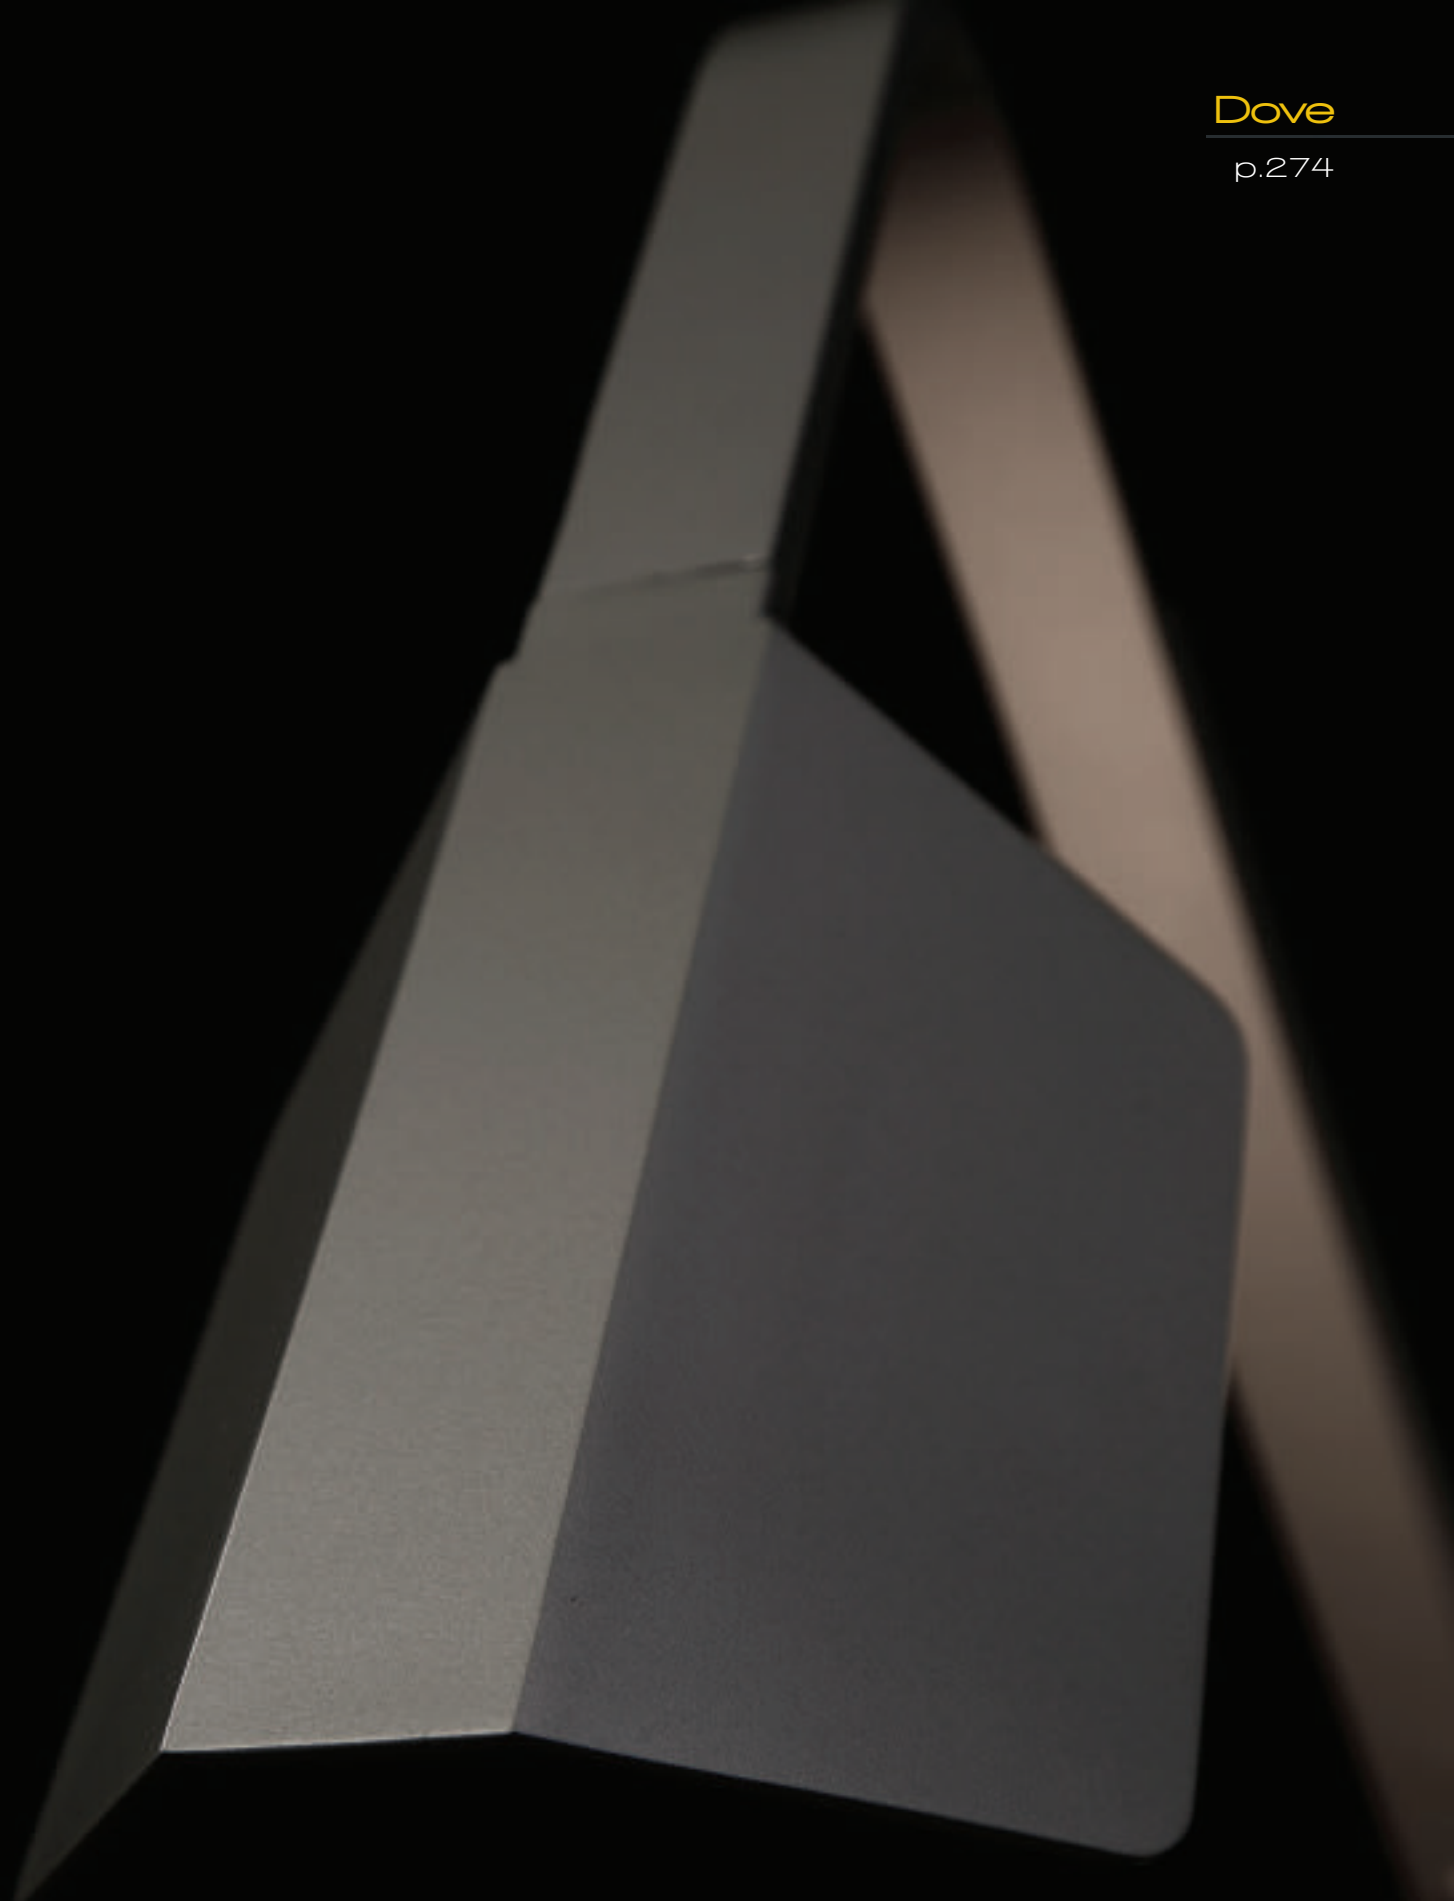



# Dove


A peaceful simple folded form transformed into a lovely modern task floor lamp. The adjustable head with high powered LEDs provide functional lighting, and features a conveniently located fingertip touch dimmer.

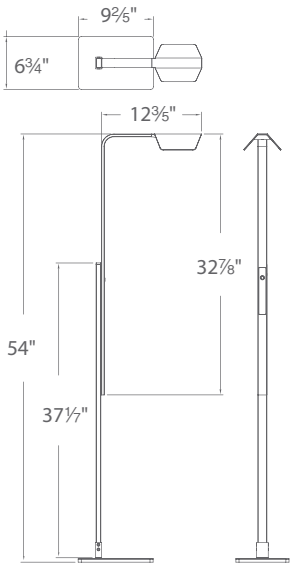

- ETL & cETL damp location listed
- CEC Title 20 Compliant
- Fingertip touch dimming
- Universal voltage (120V-220V)
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>FL-1550</b>	10W	120V-220V	464	402	<b>TT</b> Titanium <b>BK</b> Black

Example: **FL-1550-TT**

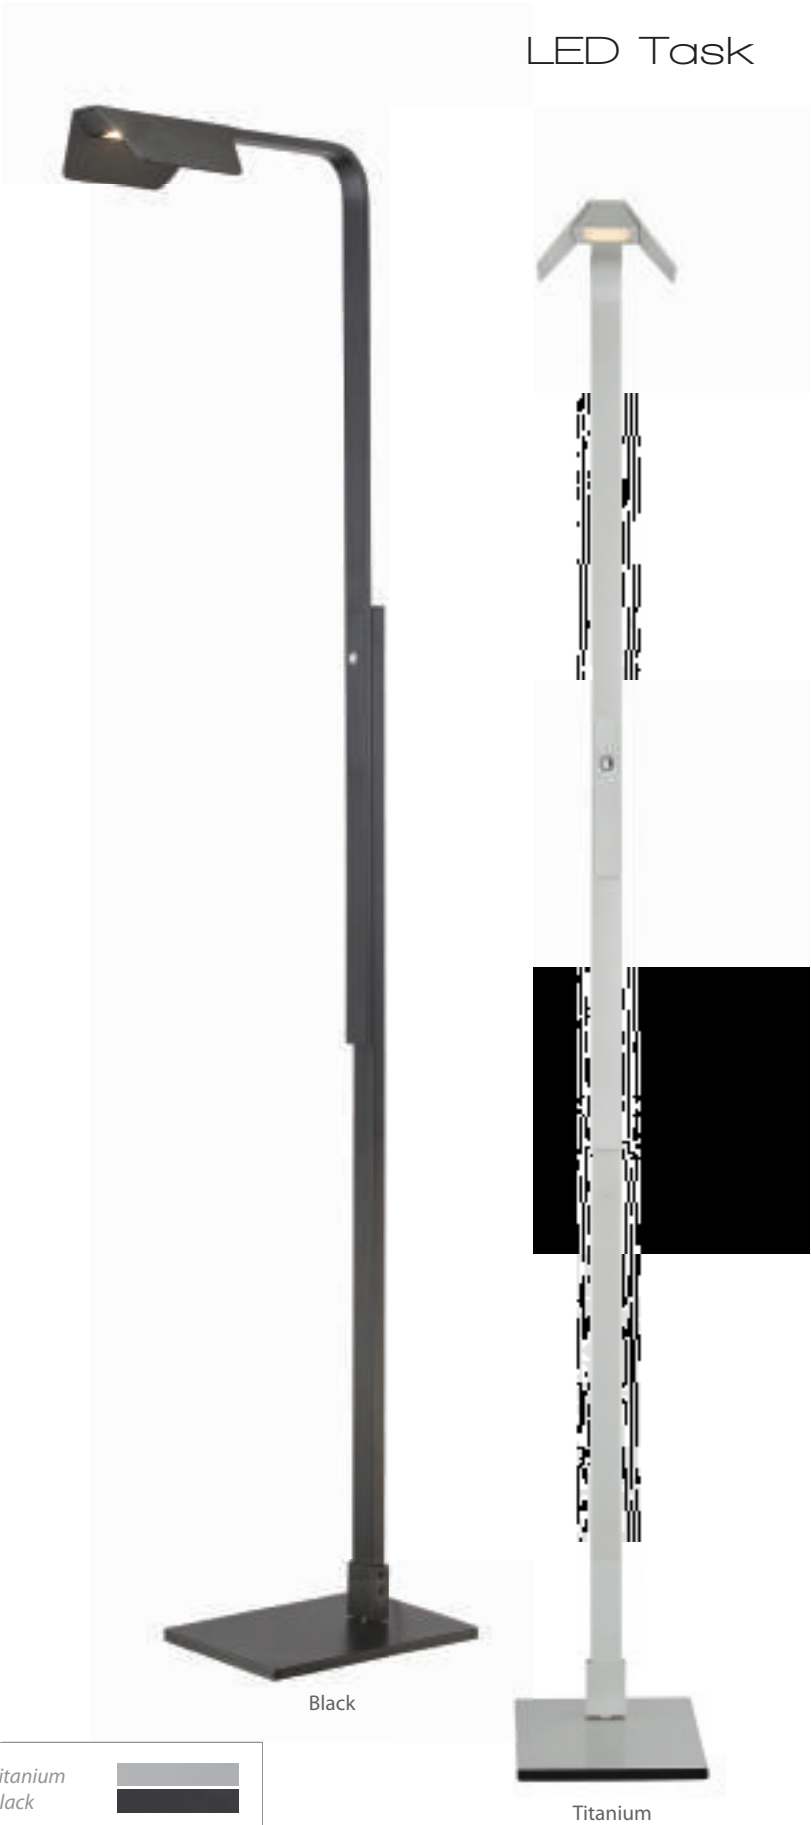

Black

Titanium

Dove

p.276




# Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision adjustment is available with easy access and control for desk and table tops.




Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
<b>TL-1010</b>	11W	120V	630	455	<b>AL</b> Brushed Aluminum <b>BK</b> Black <b>MC</b> Multicolor

Example: **TL-1010-MC**

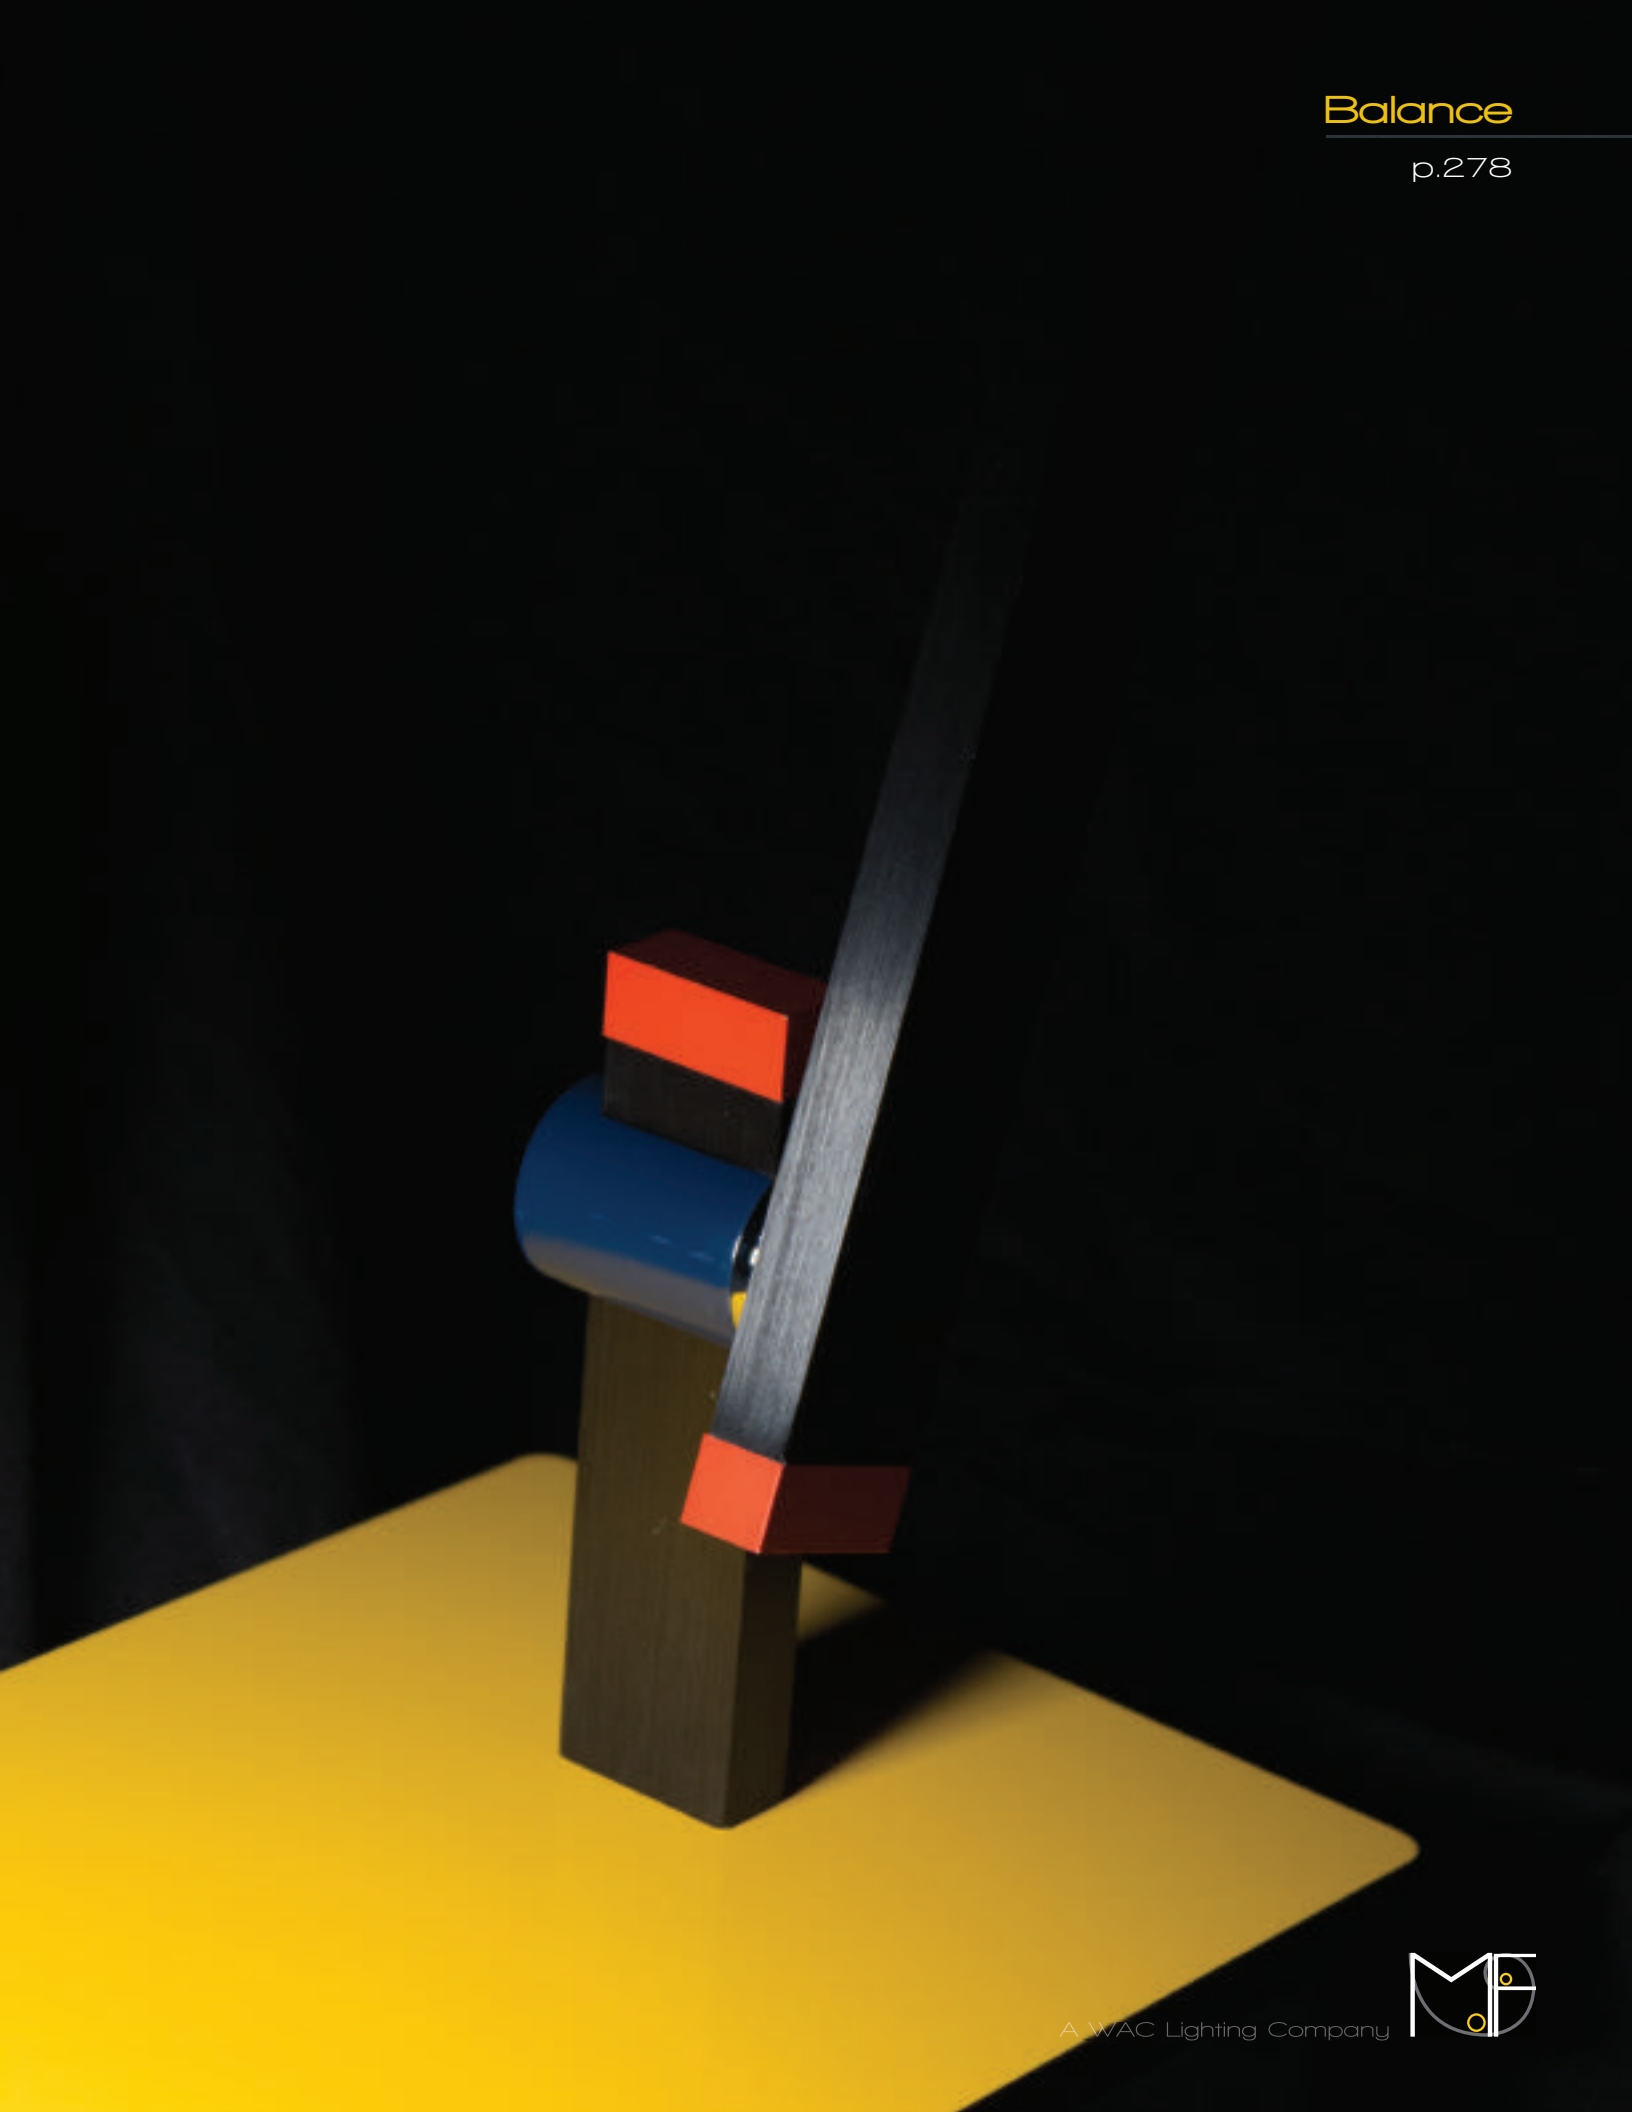

# Balance

Flexible versatility greets a chic composition. The adjustable swing arm fully dimmable LED luminaire blends function with vibrant aesthetics. With fingertip touch dimming, precision floor lamp adjustment is available with easy access and control. Balance delivers robust illumination and remains cool to the touch.

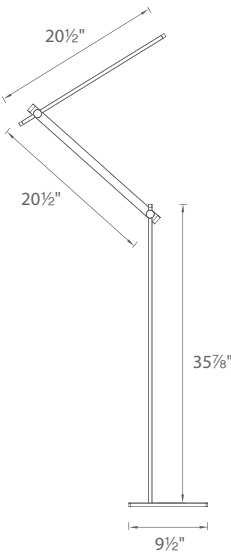

- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming on base
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1050	11W	120V	630	455	<div><div>AL Brushed Aluminum</div><div>BK Black</div><div>MC Multicolor</div></div>

Example: FL-1050-BK







# Flat

This minimalist, modern task lamp incorporates an LED module with an adjustable arm that makes it the ideal luminaire for desktops, countertops and other work and reading surfaces. Ideal for small spaces, this lamp folds neatly out of the way. This compact, high-tech luminaire is fully dimmable, with a fingertip touch dimmer and ease of operation.




- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming on base
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
TL-1110	12W	120V	943	785	AL <i>Brushed Aluminum</i> BK <i>Black</i>

Example: TL-1110-BK


Flat

p.282

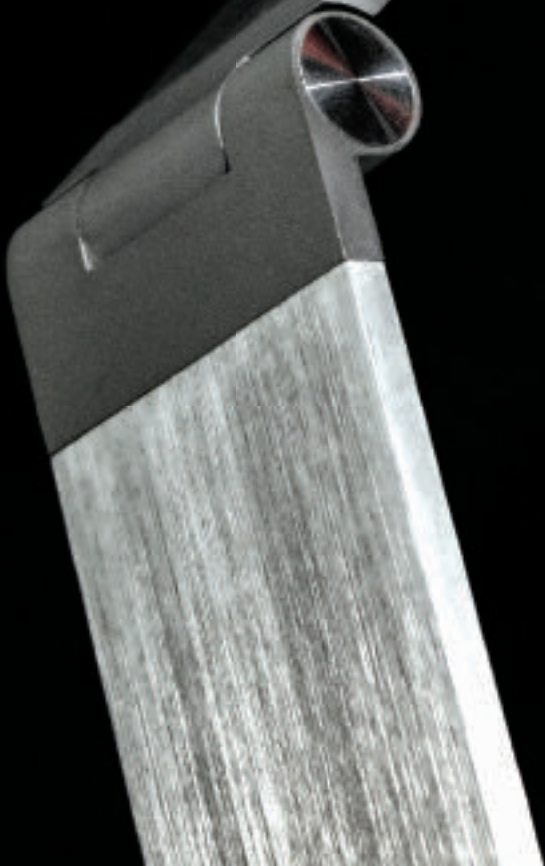

# Flat

This minimalist, modern floor lamp flips up with an LED module utilizing an adjustable arm while staying true to its style. Great for small spaces, this lamp folds up for storage. The compact, high-tech luminaire operates optimally on floors in fine homes and boutique hotels. Fully dimmable, with a fingertip touch dimmer conveniently located for ease and convenience.

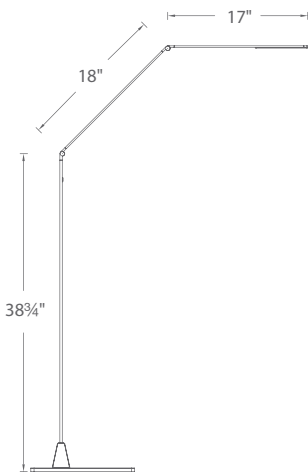

- CEC Title 20 Compliant
- ETL & cETL damp location listed
- Fingertip touch dimming
- Driver located at the plug
- 80,000 hour rated life
- Color Temp: 3000K
- CRI: 85

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
FL-1150	12W	120V	943	785	AL <i>Brushed Aluminum</i> BK <i>Black</i>

Example: **FL-1150-BK**



Flat

p.284

