

Assembly Instructions For Towel Ring, Toilet Paper Holder, Hook, Soap Dish, Tumbler #2032(E) REV 6/06

1. Hold base of the product on desired wall location and lightly mark outline of base. Place mounting plate in vertical position, with rounded edge facing up at center of marked outline and mark a dot at center of each of it's two slotted holes.

2. Dry wall or Tile on Dry Wall Installation:

Pre-drill holes using 3/8" drill bit. (Tile on dry wall installation requires 3/8" masonry drill bit).

NOTE: For more secure installation of the product onto a dry wall, we recommend screwing directly onto vertical wood stud/s or horizontal wood brace (horizontal plank in between vertical studs) located behind the wall. Use an electronic stud finder to locate stud or brace. If stud or brace do not exist at desired location, then recommend hiring a qualified contractor to install a wood brace behind the wall.

Wood Wall Installation: Pre-drill holes using 1/8" drill bit.

Masonry Wall or Tile on Masonry Wall Installation:

Pre drill holes using 3/16" masonry drill bit)

3. Dry Wall or Tile on Dry Wall Installation: Insert machine screws thru two slotted holes in mounting plate. Thread butterfly anchors into machine screws as shown in diagram. Pinch together the ends of butterfly anchors and push into predrilled 3/8" holes until anchors spring open inside of wall. While pulling mouting plate away from wall, tighten screws with a screw driver.

NOTE: For more secure installation of the product onto a dry wall, we recommend screwing directly onto vertical wood stud/s or horizontal wood brace (horizontal plank in between vertical studs) located behind the wall. Use an electronic stud finder to locate stud or brace. If stud or brace do not exist at desired location, then recommend hiring a qualified contractor to install a wood brace behind the wall.


Wood Wall Installation: Insert sheet metal screws thru two slotted holes in mounting plate. Fasten screws directly into predrilled 1/8" holes.

Masonry or Tile on Masonry Wall Installation: Insert plastic anchors into pre-drilled 3/16" holes. Insert sheet metal screws thru two slotted holes in mounting plate. Fasten screws into plastic anchors.


4. Mount the product onto mounting plate and tighten set screw at bottom of base with provided hex key.

Care and Cleaning Instructions


Using a soft cloth or sponge wash with warm and soapy water. Do not use abrasive cleaners or cleaner containing bleach.

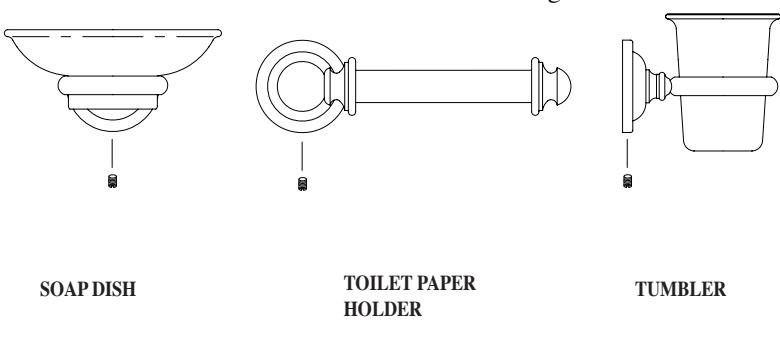

**WOOD WALL or
MANSONRY WALL or
TILE ON MANSONRY WALL INSTALLATION:**



**DRY WALL or
TILE ON DRY WALL INSTALLATION:**



Mounting Plate

Base

Set Screw

HOOK

Hex Key

TOWEL RING

SOAP DISH

TOILET PAPER
HOLDER

TUMBLER