

FIG: 1 CHAIN HUNG INSTALLATION


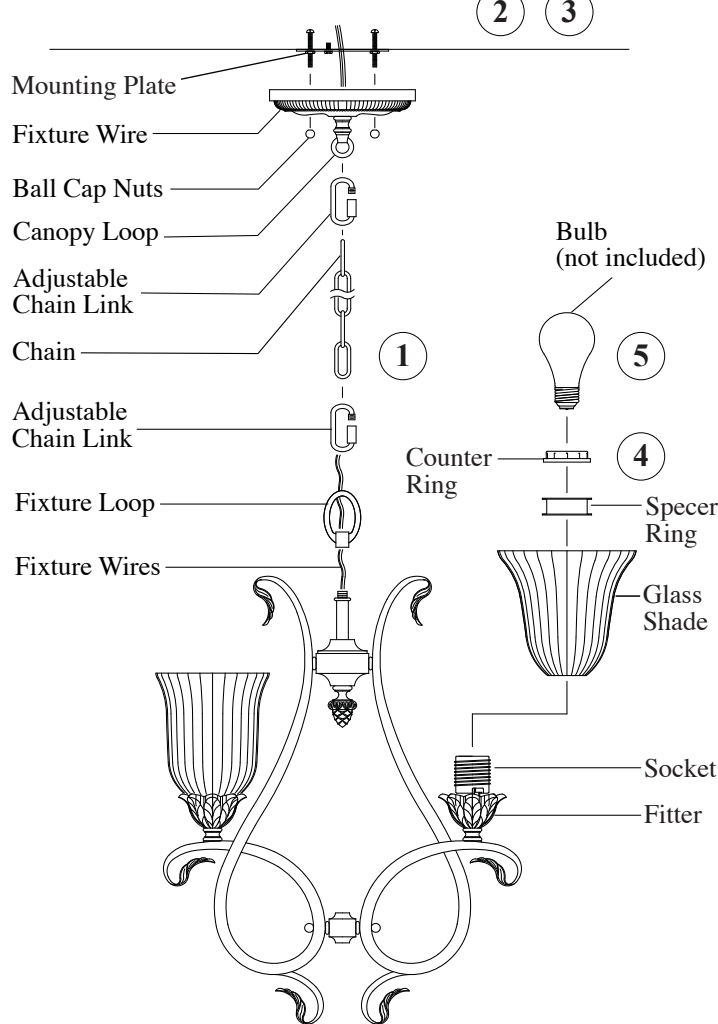


FIG: 2 FLUSH INSTALLATION

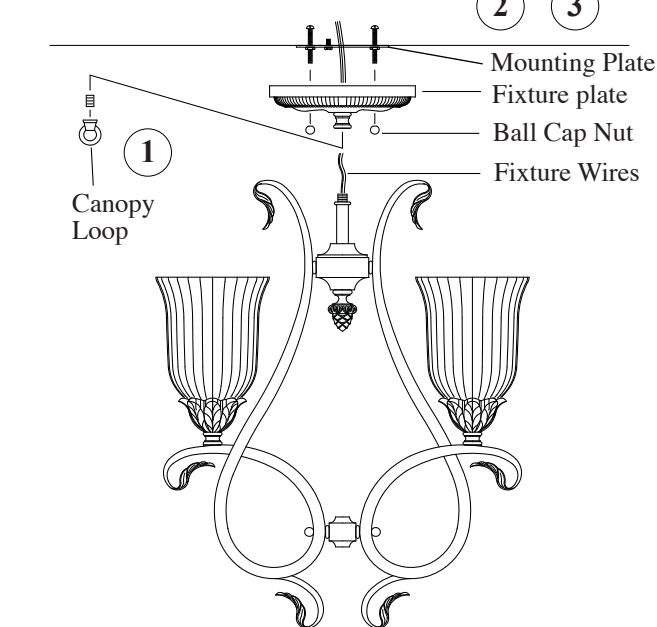

IMPORTANT

TURN OFF POWER AT MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs are not included.

1. This fixture can be mounted onto ceiling either as chain hung or flush mount:

CHAIN HUNG INSTALLATION- Fig. 1:

- A. Take fixture wire (with plastic insulation) and ground wire and thread through fixture loop. Then install loop onto threaded pipe located at top of fixture.
- B. This fixture is supplied with 2 threaded chain links. These links are opened and closed by twisting cylinder on chain link. One threaded chain link should be installed onto canopy loop and the other should be installed onto fixture loop. The standard chain should be installed in between these 2 threaded chain links.
- C. Determine the desired length of chain to hang. Remove any unwanted links with chain plier.
- D. Take ground wire and weave through above chain links, then thread through center hole in canopy loop. Repeat with fixture wire (wire with plastic insulation).

FLUSH MOUNT INSTALLATION- Fig. 2:

- A. Remove and discard canopy loop and threaded pipe from fixture plate.
 - B. Thread ground wire and fixture wire through fixture plate. Install fixture plate by screwing onto threaded pipe.
2. Cut excess wires leaving only 6" (15cm) length of wires above canopy. Split fixture wire into two strands. Then strip off 3/4" (19mm) of outer plastic insulation.
 3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.

NOTE: Before starting wire connection, enlist a helper to support the fixture, or make a hook from a wire coat hanger and temporarily suspend the fixture from mounting plate.

4. Install glass shade onto fitters by fastening with spacer ring and counter ring.
5. Install light bulbs (not included). See label located at socket area for type and maximum allowed wattage.