



# Assembly Instructions For **F2277/6** (E) 10/07

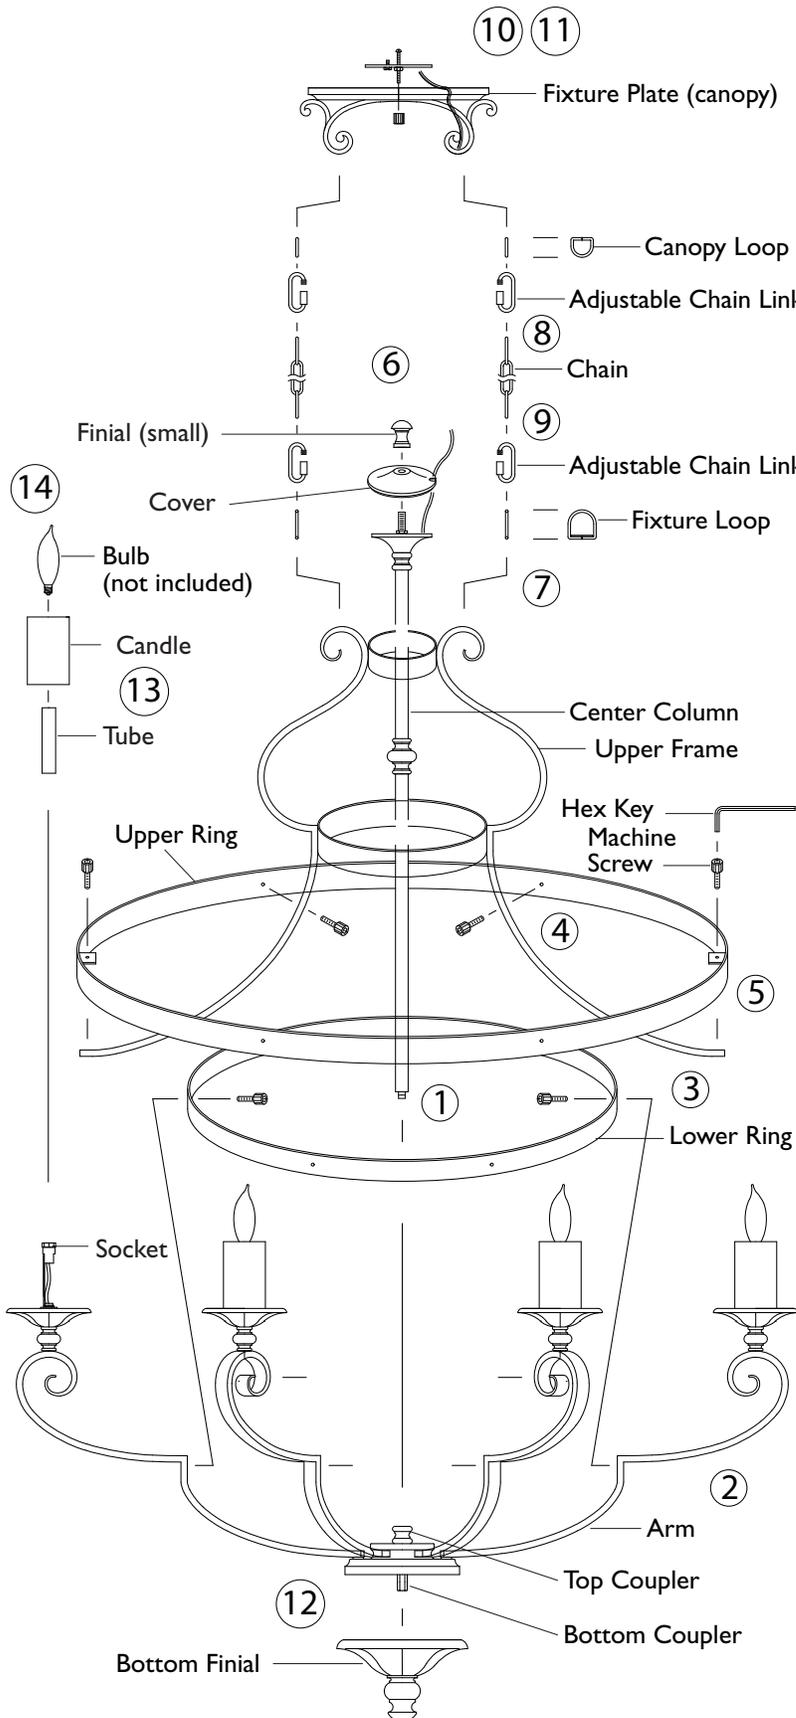

**IMPORTANT  
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT  
BREAKER BOX  
BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulb not included.

- Slip center column through fixture wires, which are located above the top coupler. Then while gently pulling wires from above, install the column by screwing securely onto the coupler.
- Spread open arms so they are evenly spaced apart from each other.
- Install lower ring onto arms by fastening with machine screws. See illustration for correct location. Use supplied hex key to tighten.
- Install upper ring onto arms by fastening with machine screws. See illustration for correct location. Use hex key to tighten.
- Install upper frame by placing under two tabs located at upper ring and then fastening with two machine screws.
- Install cover onto top of center column by fastening with finial. **NOTE:** Place fixture wires onto notch before closing the cover onto the column.
- A. Insert fixture loop onto curls located at upper frame.  
B. Insert canopy loop onto curls located at fixture plate.
- Attach Chains:**  
A. Open adjustable chain links by turning small round tube at one side.  
B. Hook chain onto open adjustable chain link. Then attach adjustable chain link onto loop located at fixture plate. Close adjustable chain link by turning back small round tube.  
C. Repeat other side.  
D. At this point determine the desired length of chains to hang. Remove any unwanted chain links. Additional chains can be purchased through your local Murray Feiss retailer.  
E. Hook another open adjustable chain link at bottom of each chain. Then attach adjustable chain links onto loop located at top of fixture arm curls. Close adjustable chain links by turning back small round tube.
- Take ground wire (without plastic insulation) and weave through above chain links. Then thread through hole in fixture plate loop. Repeat with fixture wires (with plastic insulation).
- Cut excess fixture and ground wires leaving only 6" (15 cm) length above canopy. Split the fixture wires into two strands. Then strip 3/4" (19 mm) of outer plastic insulation.
- Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
- Install bottom cover by screwing onto bottom coupler.
- Slip tube over sockets. And then slip candle over tube. **Note:** Deeper hollow section of candle must be located at bottom.
- Install bulb (not included). See relamping label located at socket area for type and maximum allowed wattage.



**MURRAY  
FEISS**

Generation Brands™