


Assembly Instructions For

F2279/10+5 (E) 10/07

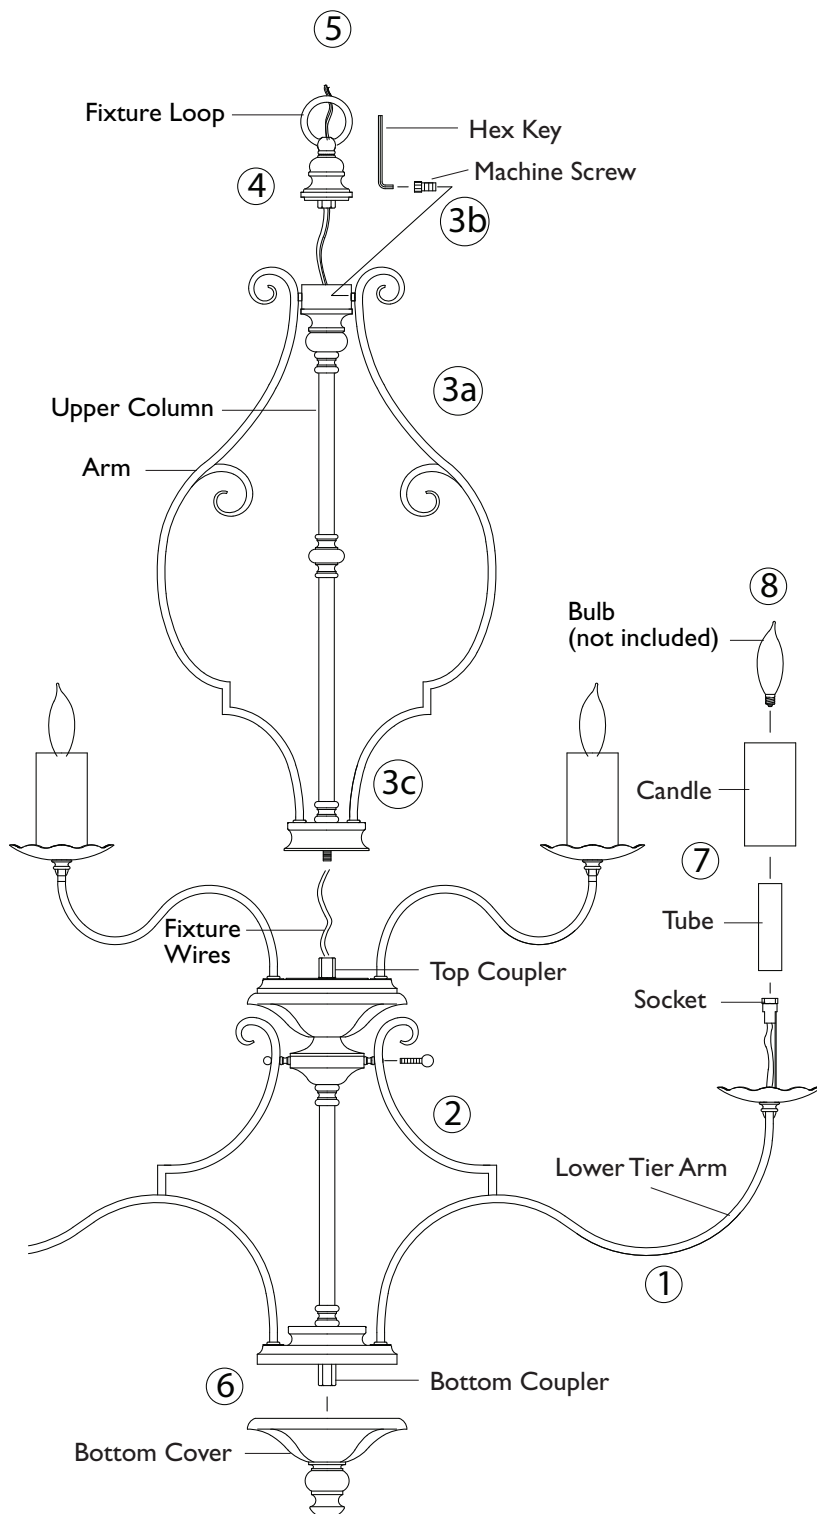


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. Spread open all arms so they are evenly spread out to each other.
2. Lock lower tier arms by fastening with cap screw onto center body.
3. A. Spread open the arms on upper column so they are evenly spread out from each other.
B. Install arms onto center body, located at top section of center column, by fastening with machine screws. Use enclosed hex key to tighten machine screws.
C. Thread fixture wires through upper column. Then install column by screwing onto top coupler. Make certain to remove slack of wires during screwing by pulling from above.
4. Slip fixture loop through fixture wires, located above upper column. Then install fixture loop by screwing on top of column.
5. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
6. Install bottom cover by screwing onto bottom coupler.
7. Slip tube over sockets. And then slip candle over tube. Note: Deeper hollow section of candle must be located at bottom.
8. Install bulb (not included). See relamping label located at socket area for type and maximum allowed wattage.



MURRAY
FEISS
Generation Brands™