


Assembly Instructions For

F2282/3 (E) 10/07

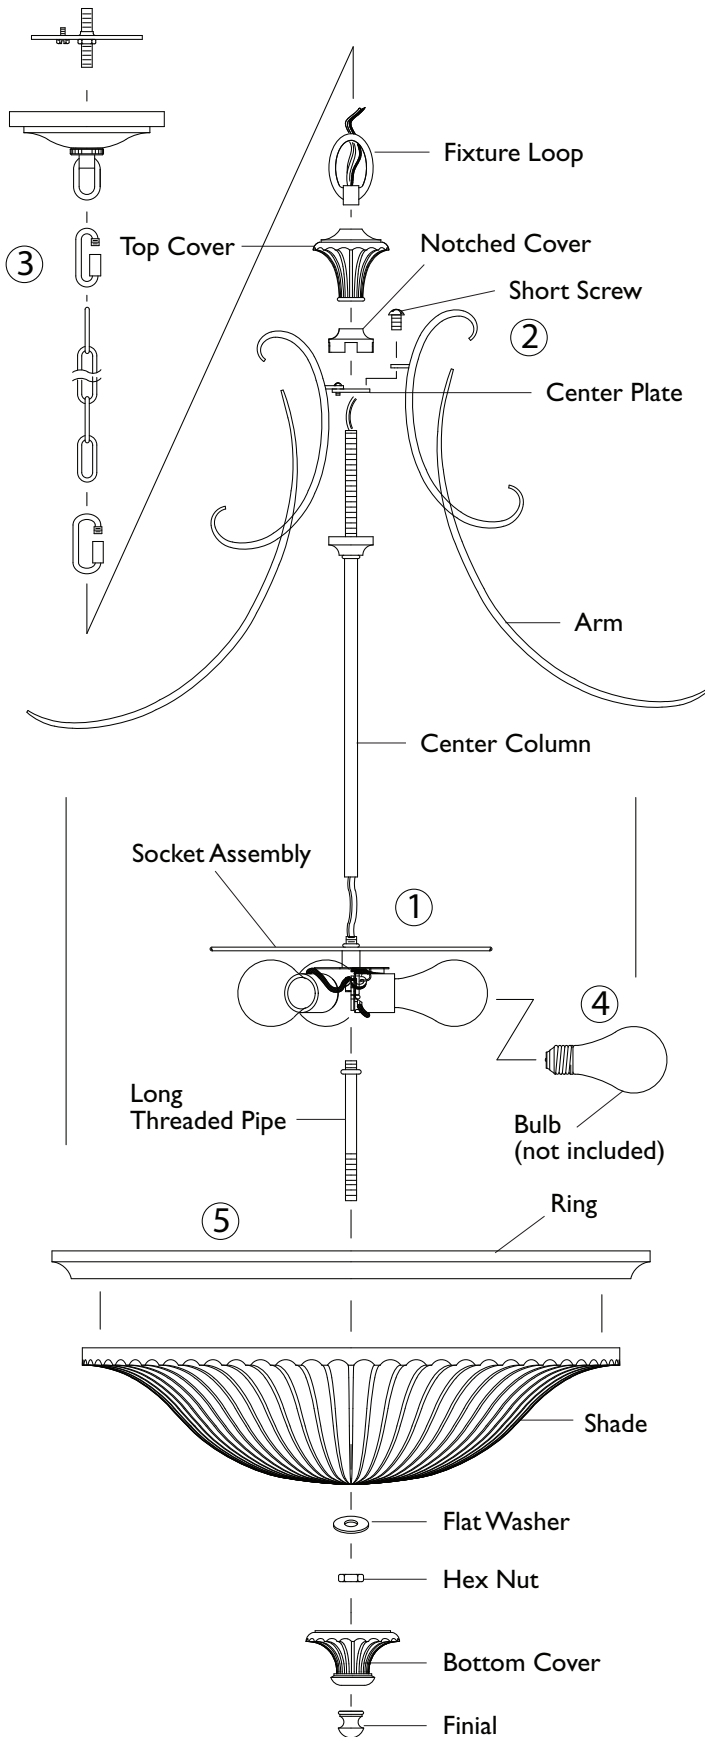


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. Slip center column through fixture wires. Then install by screwing onto top of socket assembly.
2. A. Install upper section of arms onto center plate by securely fastening with screws. Repeat other arms.
B. Slip center plate through fixture wires. Then place on top of center column.
C. Spread open the arms so they are equally spaced apart from each other.
D. Slip notched cover until arms are locked into it's notches. Then slip top cover and lock them together by fastening with fixture loop.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
4. Instal light bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
5. A. Install long threaded pipe by screwing into bottom of socket assembly. See illustration for correct position of pipe.
B. Sit ring on top of glass shade. Then while holding securely onto the glass shade, slide through the installed threaded pipe until ring touches bottom end of arms.
C. Secure into position by fastening with a flat washer and hex nut.
D. Slip bottom cover through the same pipe. And secure by fastening with finial.



MURRAY
F E I S S

Generation Brands™