


Assembly Instructions For

F2293/5 (E) 10/07

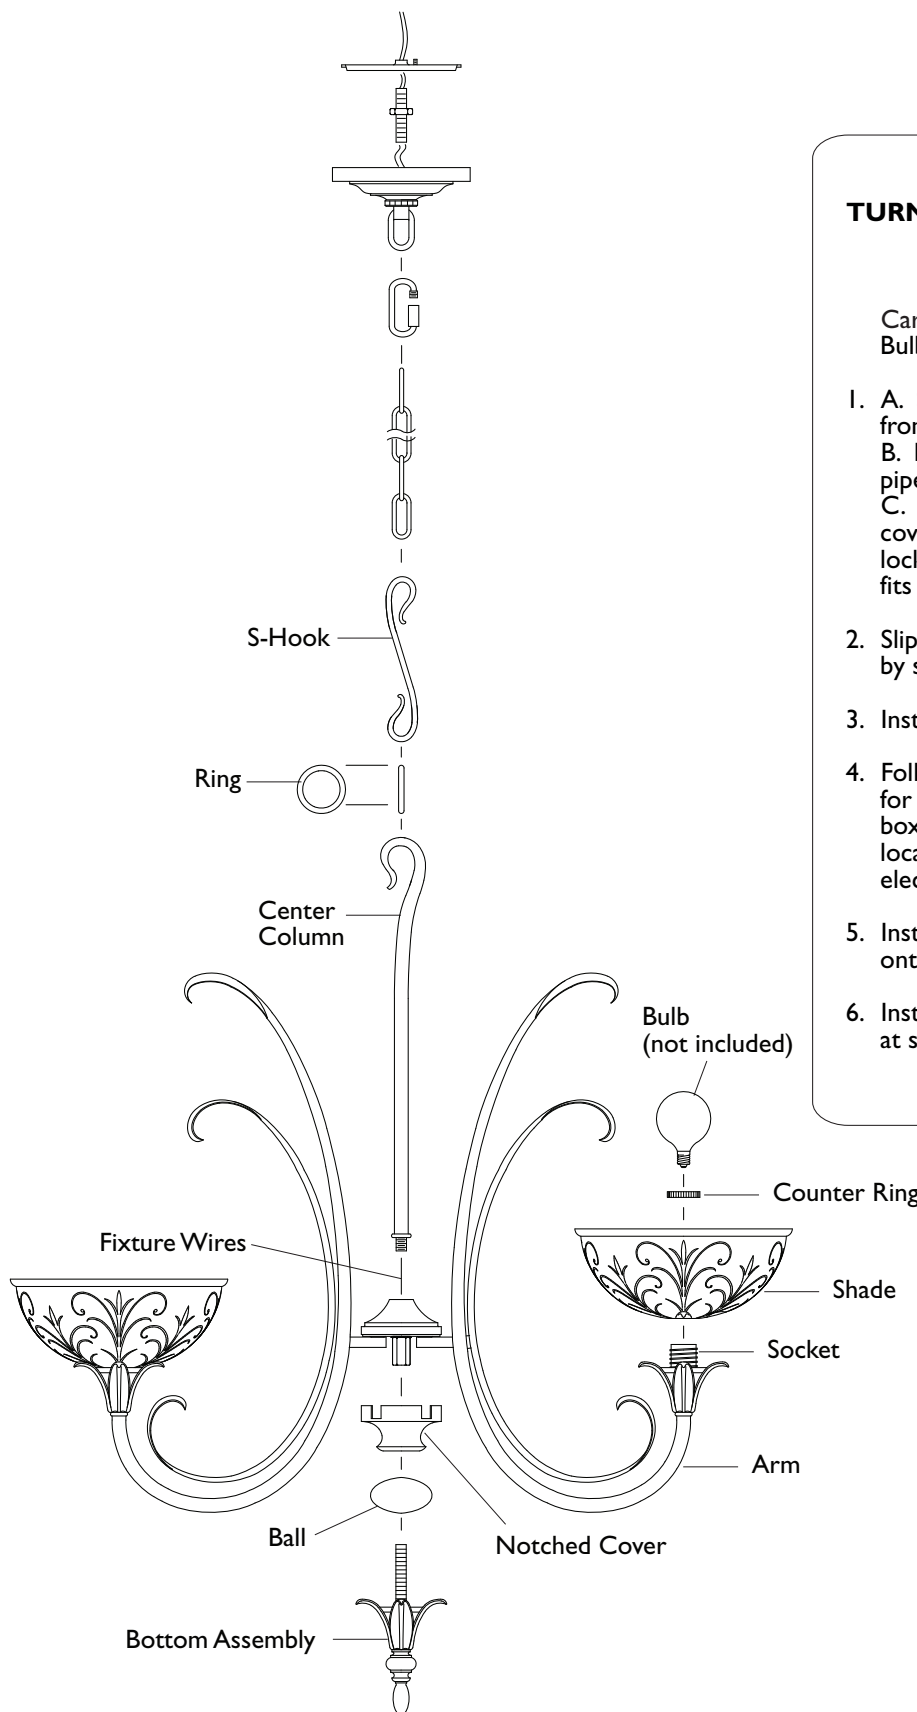


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.
Bulb not included.

1. A. Spread open arms so they are evenly spaced apart from each other.
B. Insert ball and notched cover onto the threaded pipe located at the bottom assembly.
C. Install bottom assembly, along with ball and notched cover, onto bottom of fixture. Make certain arms are locked into notches of the cover. Once notched cover fits securely then finish tightening the bottom assembly.
2. Slip center column through fixture wires. Then install by screwing into top of fixture.
3. Install ring and S-hook by hooking onto fixture loop.
4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
5. Install shades onto fitters by fastening counter rings onto threaded sockets.
6. Install bulbs (not included). See relamping label located at socket area for type and maximum allowed wattage.



MURRAY
F E I S S
Generation Brands™