
Assembly Instructions For

F2717/3 (E) 12/11

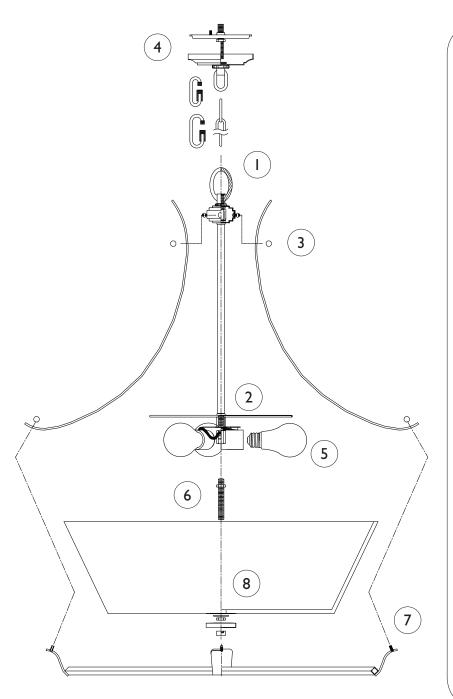

IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX **BEFORE STARTING INSTALLATION**

Carefully unpack and identify all parts before assembly. Bulbs not included.

- 1. Install the fixture loop onto the top of the fixture.
- 2. Install the socket assembly onto the center pipe.
- 3. Then install the arms onto the fixture and secure with the ball cap nuts as shown on the diagram.
- 4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture then hire a qualified electrician to create one.
- 5. Install light bulb (not included). See relamping label at socket area for type and maximum allowed wattage.
- 6. Screw the long threaded pipe into coupler located at bottom of socket assembly. Note correct position of threaded pipe at illustration.
- 7. Then while one person is firmly holding onto the metal ring, have another person secure the ring onto the bottom part of the arms by fastening with the cap nuts.
- 8. Slip shade through the threaded pipe until it securely checks into bottom of crown. Then secure into position by fastening with knurled nut, cap, and finial.



