


ASSEMBLY INSTRUCTIONS FOR OL4513

(E) 4/26/06

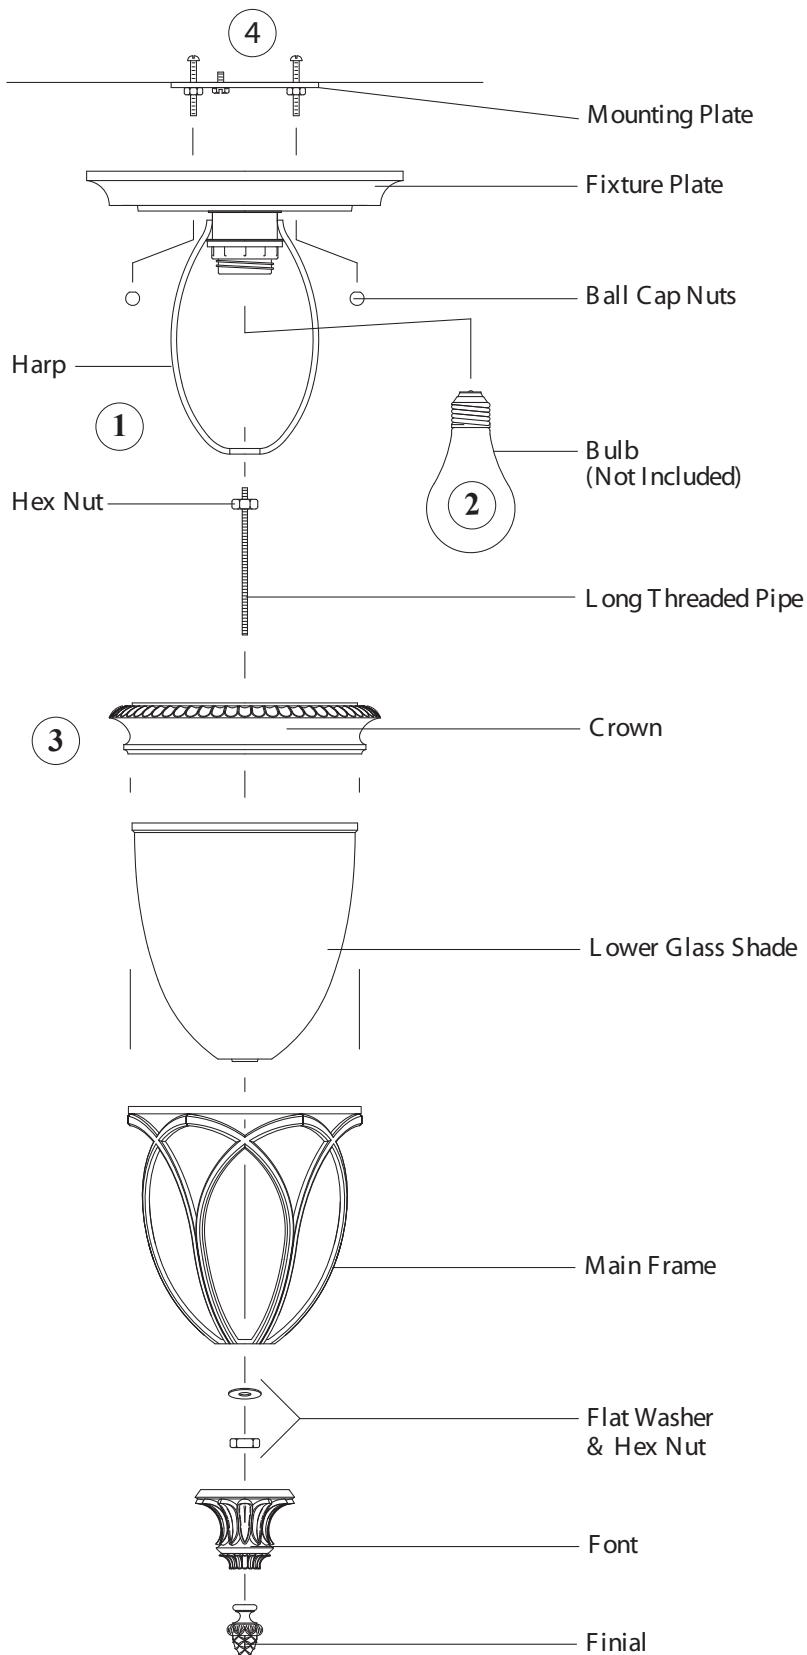

IMPORTANT:
TURN OFF POWER AT MAIN FUSE
OR CIRCUIT BREAKER BOX BEFORE
STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Install a hex nut onto one end of center pipe leaving about 3/8" (10 mm) of thread exposed. Install same end of threaded pipe by screwing into harp. Then tighten hex nut.
2. Install bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.
3. Gently sit the lower glass shade inside of main frame. Then sit crown on top of main frame. Carefully slide them through the already installed threaded pipe until top of crown checks securely inside of the upper glass shade. Lock them into position by fastening with a flat washer and hex nut. Do not over tighten. NOTE: Make certain the crown is sitting properly in between the upper glass shade and main frame. Then slip the font and secure by fastening with finial.
4. Follow enclosed " Fixture Installation Instructions" for electrical and fixture installation onto house outlet box.