


Assembly Instructions For

SF244, SF245 (E) 10/07

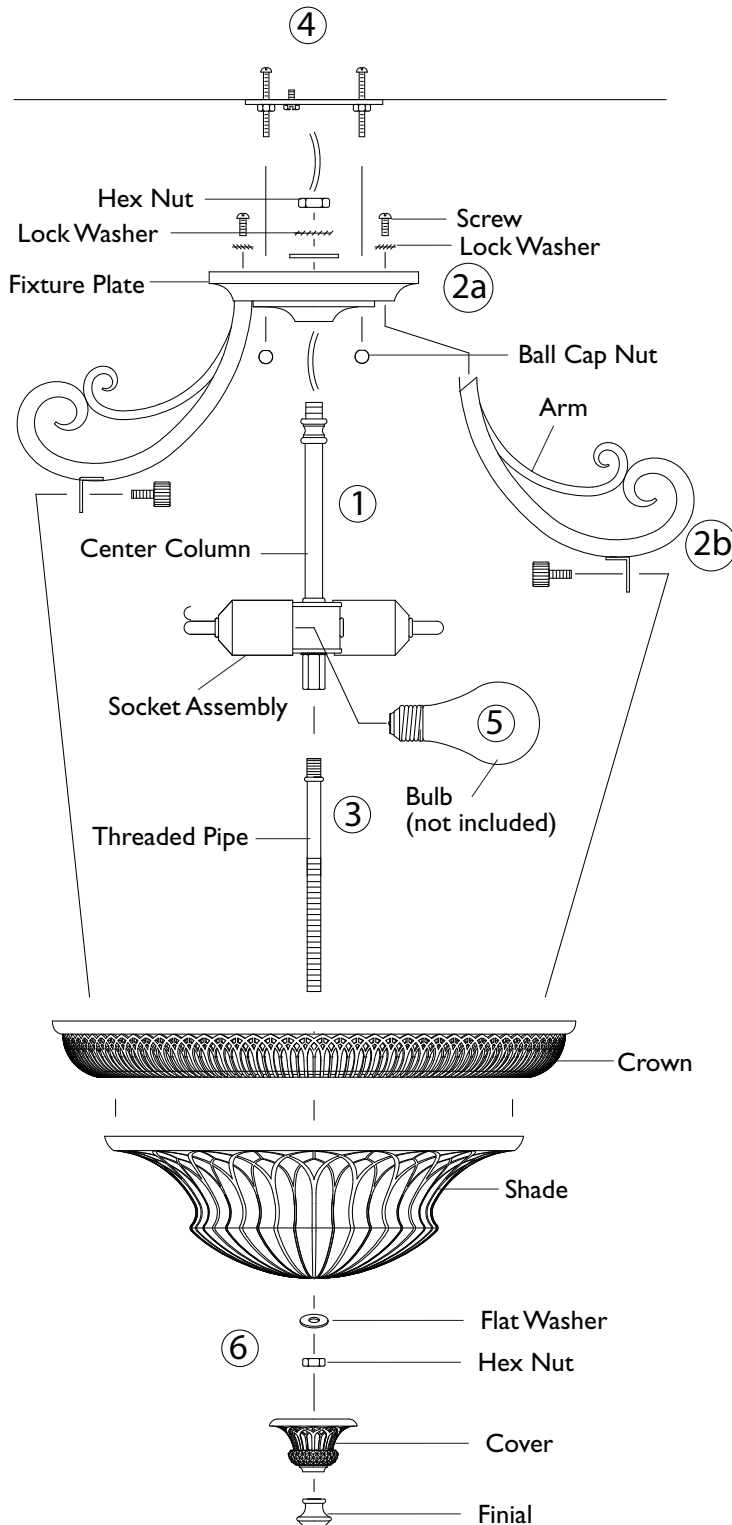


IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Take fixture wire and ground wire exiting above center column and thread through, fixture plate, lock washer and hex nut. Lock all together by tightening hex nut.
2. A. Install upper section of arms onto fixture plate by fastening with screw (short) and small lock washer.
B. Install lower section of arms onto crown by fastening with thumb screws.
3. Screw the long threaded pipe into coupler located at bottom of socket assembly. Note correct position of threaded pipe at illustration.
4. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
5. Install light bulb (not included). See relamping label located near socket area for type and maximum allowed wattage.
6. A. Slide glass shade through the installed threaded pipe until it securely checks onto crown. Secure in position by fastening with a washer and hex nut. **IMPORTANT: DO NOT OVER TIGHTEN.**
B. Slip cover through the pipe and secure by fastening with finial. Do not over tighten.



MURRAY
F E I S S

Generation Brands™