


# Assembly Instructions For

# SF247 (E) 10/07

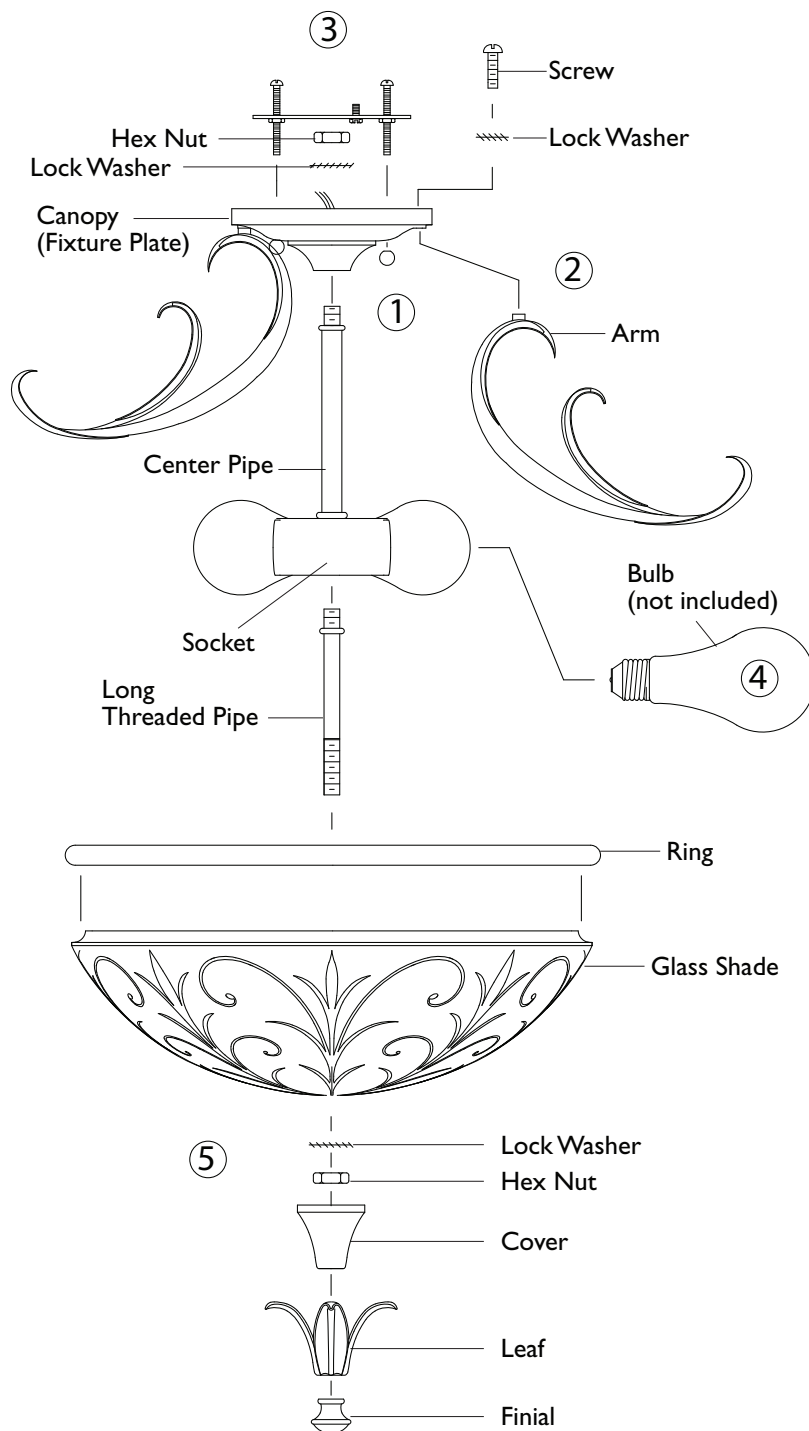


## IMPORTANT

### TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly.  
Bulbs not included.

1. Take fixture wires and ground wire exiting above center pipe and thread through fixture plate, lock washer, and hex nut. Then while removing any slack of wires in between parts, lock all together by fastening hex nut.
2. Install upper section of arms onto fixture plate by fastening with screw (short) and small lock washer.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
4. Install light bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.
5. A. Install long threaded pipe by screwing into bottom of socket assembly. See illustration for correct position of pipe.  
B. Sit ring on top of glass shade. Then while holding securely onto the glass shade, slide through the installed threaded pipe until ring touches bottom end of arms.  
C. Secure into position by fastening with a flat washer and hex nut.  
D. Slip cover and leaf through the same pipe. And secure by fastening with finial.



**MURRAY  
FEISS**  
Generation Brands™