


READ ALL INSTRUCTIONS
BEFORE ASSEMBLING LAMP



Unpack lamp parts onto carpeted surface or blanket. Be sure to place parts in a line that closely resembles assembled lamp. All wires are connected when unpacking. Be careful handling wires during assembly.

- Before proceeding with below instructions follow enclosed “**Multiple Standard Installation Instructions**” for electrical and fixture installation onto wall outlet box.
- Thread Font into Lamp Body and turn to tighten.
- Place Harp to fit into Yoke by squeezing the bottom of Harp.
- Install a Type A, 100 Watt Max. On-Off Medium Base Bulb (not included) into Socket as noted on relamping label at Socket area.
- Unscrew Finial from Harp and set aside. Place Lampshade over screw thread of Harp and tighten Finial back in place.
- ELECTRICAL PLUG IN:**
Option 1: Plug onto existing wall outlet receptacle: Run wall bracket electrical wire down wall and plug into existing house wall outlet. Attach cord cover assembly to wall using supplied plastic anchor's. (see option 1)

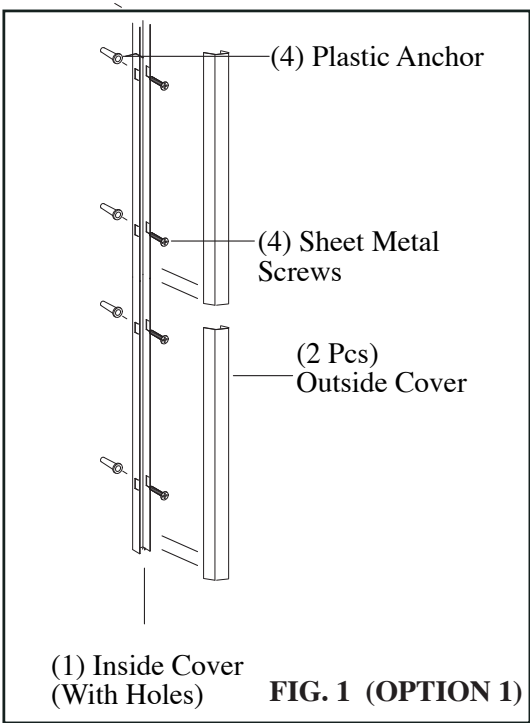


CAUTION: DISCONNECT POWER DURING INSTALLATION

Hardwire Installation

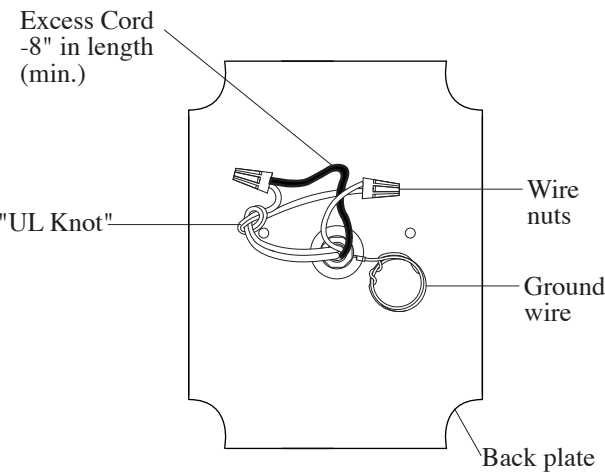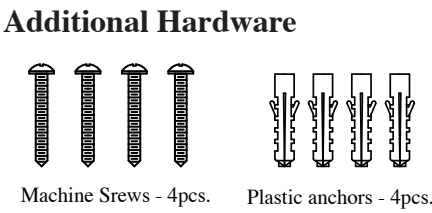

For Hardwire Application

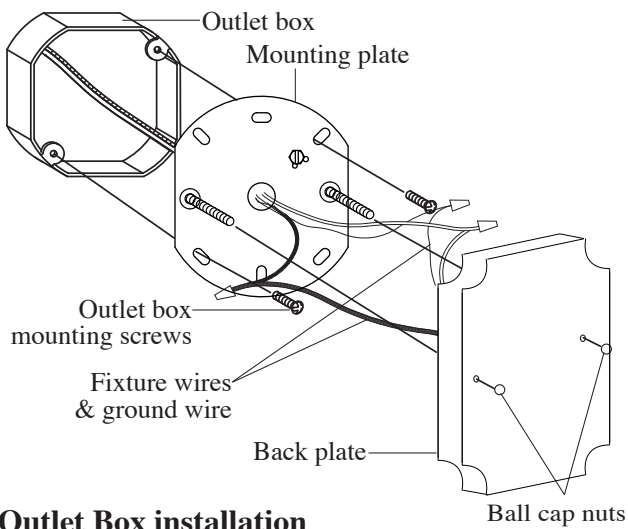

Outlet Box installation

- If you are replacing an existing fixture disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
- Thread the machine screws into the opposite side of the mounting strap from the green ground screw. Lock the machine screws into place with lock nuts.
- Fasten the mounting strap to the outlet box using the two screws supplied with the outlet box.
- Release wire nuts and un-tie "UL Knot" CAUTION: Must remove remaining cord from bottom where Polarized Plug exits lamp and discard.
- Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires on the other side.
- Grounding Instructions:**
Wall lamp is provided with a ground wire. If used with cord and plug as a wall lamp, then remove ground wire by cutting it off close to the back of back plate. If used to mount to an outlet box (or hard wired) as a fixture, then the ground wire must be used as follows.
Connect fixture ground wire to ground wire from outlet box with wire connector (provided) after following the above steps. **Never connect ground wire to black or white power supply wires.**
- To make electrical connections:**
Connect the white wire(s) from the fixture to the white wire of the outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box.
NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.
- Place fixture against mounting surface allowing the machine screws or threaded pipe to pass through fixture back plate. Secure with cap nut(s).