

MAGNETA Pendant

120v : **3-608-xxx**

277v : **37-608-xxx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-14 Polished Chrome




-40 Aged Brass




-24 Satin Nickel

Diffusers:



-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE 1 x 5.12W LED, 3000K, CRI 90

LUMINAIRE POWER 6.66W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: (-1) Glass: 319 lm (LM-79)
Acrylic: 266 lm (LM-79)

INPUT VOLTAGE 120V or 277V

DRIVER OUTPUT 150mA, 6W

DIMMING 0-10v & Phase (ELV) Dimming - 50/60hz 100%
to 10% Dimming

CONSTRUCTION Plated Steel and Acrylic /or Glass

METAL FINISH / DIFFUSER

(-114) White Opal Glass / Polished Chrome
(-124) White Opal Glass / Satin Nickel
(-140) White Opal Glass / Aged Brass
(-14) Matte White Acrylic / Polished Chrome
(-24) Matte White Acrylic / Satin Nickel
(-40) Matte White Acrylic / Aged Brass

MOUNTING 4" Octagonal J-Box, 2" x 3" J-Box

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598, Certified
CAN/CSA, STD C22.2 No 250.0.


Order example for standard fixture:

3-608-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-608-27124**

27: 2700K, 35: 3500K, 40: 4000K

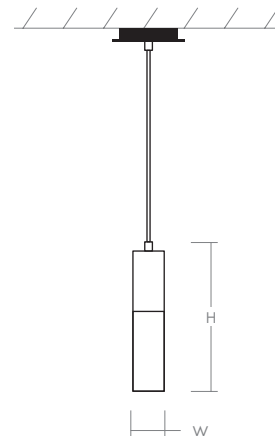

DIMENSIONS

Dia. Canopy: 5.88"

Dia Fixture: 2.50"

H. Fixture: 14.15"

Supplied with 8 ft braided cord

