


Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Brushed Nickel	Antique Bronze		A	B
P3480		-20	2 (m) 60w	15-1/4	4-5/8
P3481		-20	3 (m) 60w	19-3/8	5-1/2
P3482	-09	-20	4 (m) 60w	27-3/8	7-1/8

Type _____
-09 -20

P3480 ☐
P3481 ☐
P3482 ☐ ☐

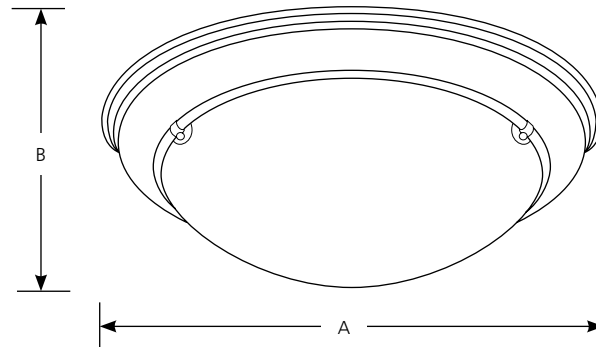

Specifications:

General

- Satin white glass bowl
- Plated Brushed Nickel (-09) finish
- Painted Antique Bronze (-20) finish
- Steel construction
- Decorative clips to secure glass and eliminate exposed fasteners
- Flush mount design
- Companion Close-to-ceiling, Hall and Foyer, Sconce, fixtures are available

Mounting

- Ceiling mount
- Ceiling pancovers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included

Electrical

- Medium base ceramic sockets
- Pre-wired

Labeling

- UL-CUL listed

P3480

ECLIPSE - FLUSH MOUNT




Report No. 2000001

No. Lamps: 2 Type Lamp: 60A19-GE Total Lumens: 1730

Fixture Efficiency: 55.0%

S/MH Ratio: 1.3

Quick Calculator Charts

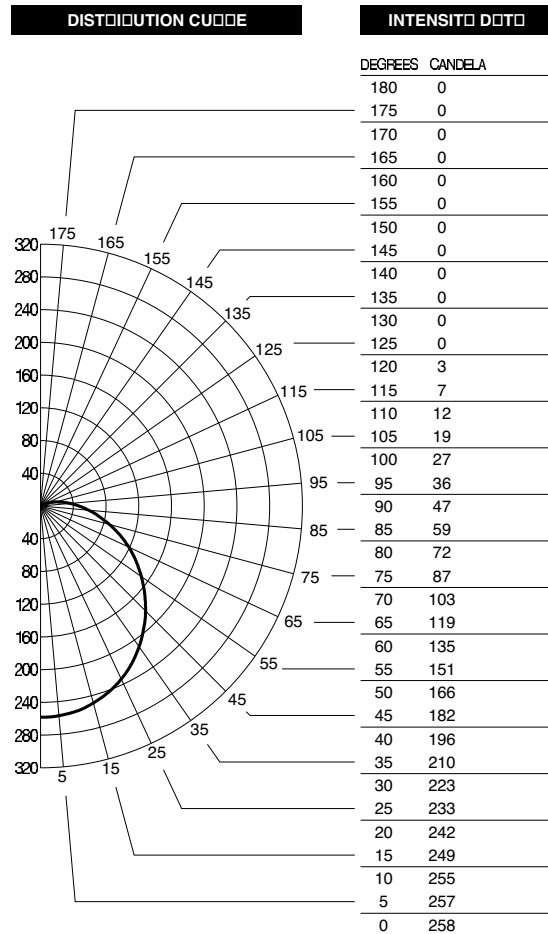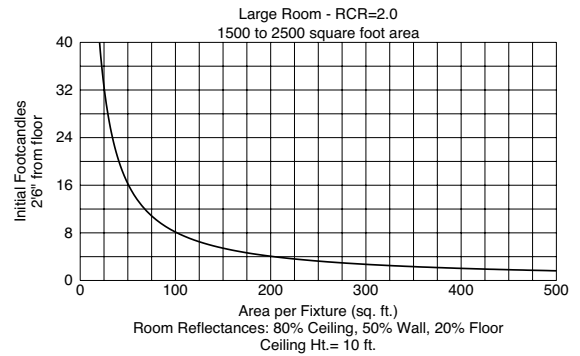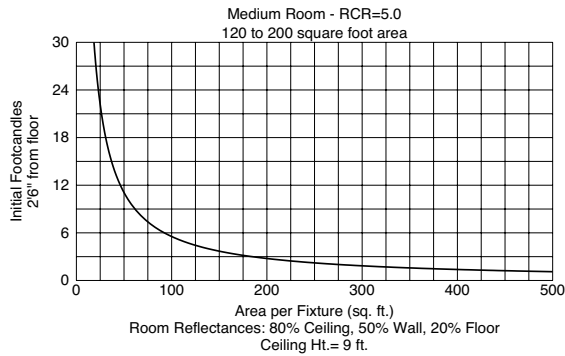

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	0.9	16	8.5	4.3	7
10	0.5	22	4.6	2.3	10
12	0.3	28	2.9	1.4	12
14	0.2	34	2.0	1.0	15
16	0.1	40	1.4	0.7	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

COEFFICIENTS OF UTILIZATION																						
Effective Floor Coefficient Reflectance 0.20																						
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	0		
0	65	65	65	65	63	63	63	63	59	59	59	56	56	56	53	53	53	51				
1	57	54	51	49	56	53	50	48	49	47	45	47	45	43	44	43	41	40				
2	52	47	42	39	50	45	41	38	43	39	36	40	37	35	38	36	34	32				
3	47	40	36	32	45	39	35	31	37	33	30	35	32	29	33	30	28	26				
4	43	36	30	26	41	35	30	26	33	29	25	31	27	24	29	26	24	22				
5	39	32	26	23	38	31	26	22	29	25	22	28	24	21	26	23	20	19				
6	36	28	23	20	35	28	23	19	26	22	19	25	21	18	24	20	18	17				
7	33	26	21	17	32	25	20	17	24	20	17	23	19	16	22	18	16	15				
8	31	23	19	15	30	23	18	15	22	18	15	21	17	14	20	17	14	13				
9	29	21	17	14	28	21	17	13	20	16	13	19	16	13	18	15	13	12				
10	27	20	15	12	26	19	15	12	18	15	12	18	14	12	17	14	11	10				

P3481

P3481




Report No. 98208

No. Lamps: 3 Type Lamp: 60A19-GE Total Lumens: 2595

Fixture Efficiency: 45.9%

S/MH Ratio: 1.3

Quick Calculator Charts

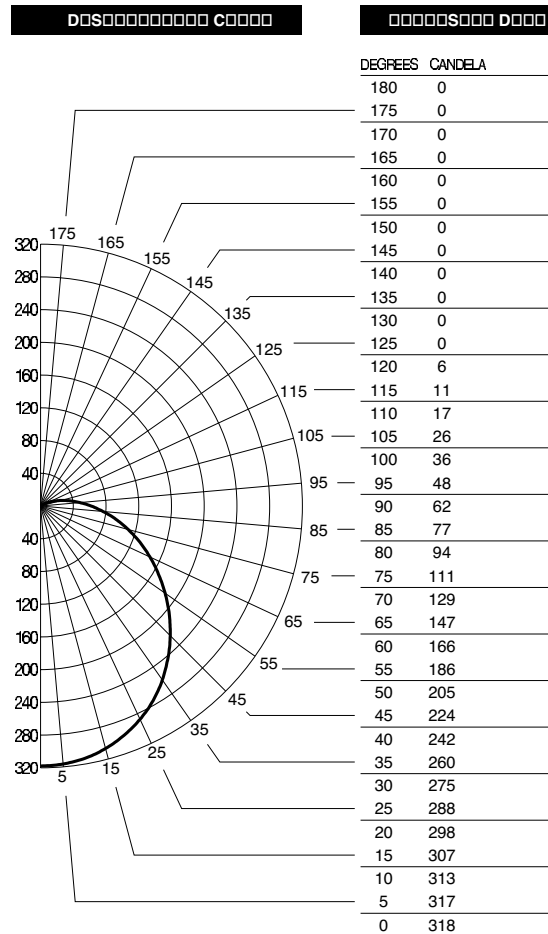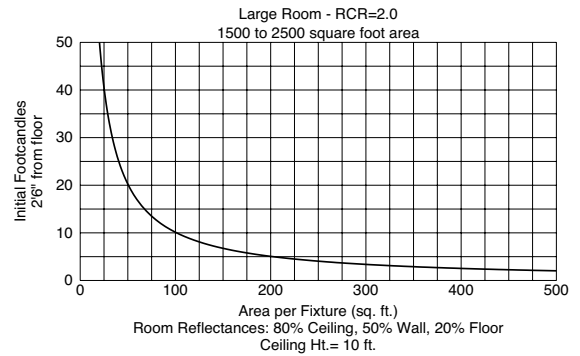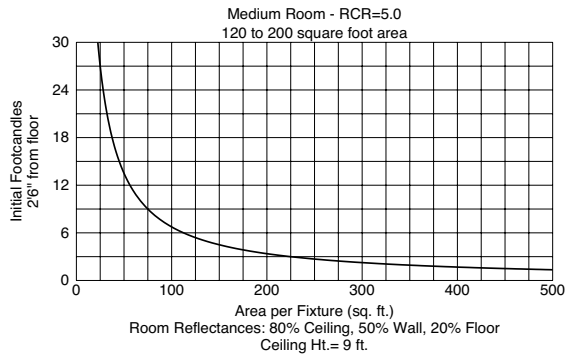

Single Fixture Data

	10% Values		Zero Degrees	50% Values	
Ceiling Ht.(Ft.)	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.1	16	10.5	5.3	7
10	0.6	22	5.6	2.8	10
12	0.4	28	3.5	1.8	12
14	0.2	34	2.4	1.2	15
16	0.2	40	1.7	0.9	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

Effect of Floor Reflectance 0.20																				
RC	80				70				50				30				10			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0	54	54	54	54	52	52	52	52	49	49	49	46	46	46	44	44	44	42	42	42
1	48	45	43	41	46	44	42	40	41	39	38	39	37	36	36	35	34	33	33	33
2	43	39	35	32	41	38	34	31	35	33	30	33	31	29	31	29	28	26	26	26
3	39	34	30	26	38	33	29	26	31	27	25	29	26	24	27	25	23	22	22	22
4	36	30	25	22	34	29	25	22	27	24	21	26	23	20	24	22	20	18	18	18
5	33	26	22	19	31	26	21	18	24	21	18	23	20	17	22	19	17	16	16	16
6	30	24	19	16	29	23	19	16	22	18	16	21	18	15	20	17	15	14	14	14
7	28	21	17	14	27	21	17	14	20	16	14	19	16	13	18	15	13	12	12	12
8	26	19	15	13	25	19	15	12	18	15	12	17	14	12	16	14	12	11	11	11
9	24	18	14	11	23	17	14	11	17	13	11	16	13	11	15	12	10	10	10	10
10	23	16	13	10	22	16	12	10	15	12	10	15	12	10	14	11	9	9	9	9

P3482

ECLIPSE - FLUSH MOUNT



Report No. 2000002

No. Lamps: 4 Type Lamp: 60A19 - GE Total Lumens: 3460

Fixture Efficiency: 48.9%


S/MH Ratio: 1.3

Quick Calculator Charts

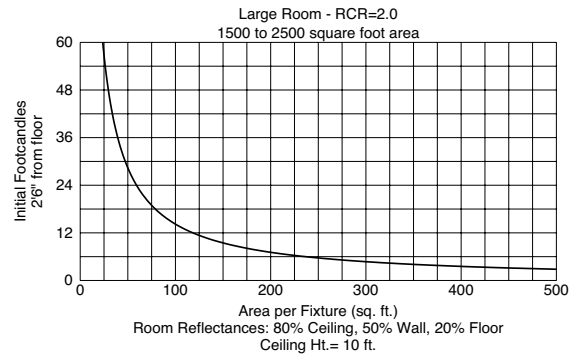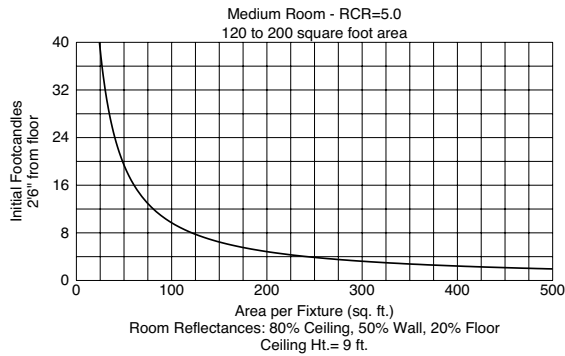

DISTRIBUTION CURVE

INTENSITY DATA

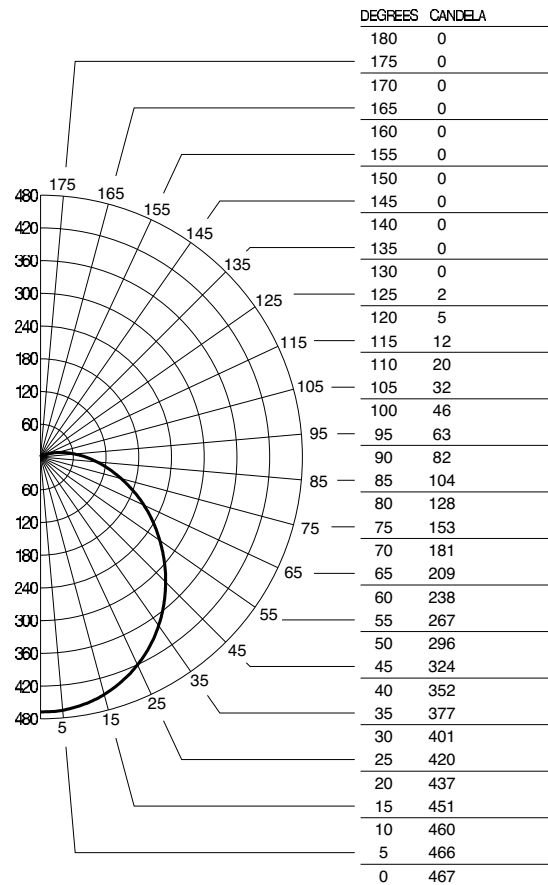

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values Beam Angle - 112		Zero Degrees Ft.-C	50% Values Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.5	16	15.4	7.7	7
10	0.8	22	8.3	4.2	10
12	0.5	28	5.2	2.6	12
14	0.4	34	3.5	1.8	15
16	0.3	40	2.6	1.3	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

COEFFICIENTS OF UTILIZATION

		Effective Floor Ceiling Reflectance 0.20															
		80				70				50				30			
RC	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	0	57	57	57	57	56	56	56	56	52	52	52	49	49	49	47	47
1	1	51	48	46	43	49	47	44	42	44	42	40	42	40	39	39	38
2	2	46	41	38	34	44	40	37	34	38	35	32	36	33	31	34	32
3	3	42	36	32	28	40	35	31	28	33	30	27	31	28	26	29	27
4	4	38	32	27	24	37	31	27	23	29	25	23	28	24	22	26	23
5	5	35	28	24	20	34	27	23	20	26	22	19	25	21	19	23	21
6	6	32	25	21	17	31	25	20	17	23	20	17	22	19	16	21	18
7	7	30	23	18	15	29	22	18	15	21	18	15	20	17	14	19	16
8	8	28	21	17	14	27	20	16	13	19	16	13	19	15	13	18	15
9	9	26	19	15	12	25	19	15	12	18	14	12	17	14	12	16	13
10	10	24	18	14	11	23	17	13	11	17	13	11	16	13	11	15	12