



solid state

Bingo
Energy Star® qualified


Close-To-Ceiling

Type _____

-0930K -7430K

P3695 ☐ ☐

Catalog No.	Finish		Light Source	Dimensions (Inches)		
	Brushed Nickel	Venetian Bronze		A	B	C
P3695	-0930K	-7430K	LED (included)	11-5/8	3-3/8	40

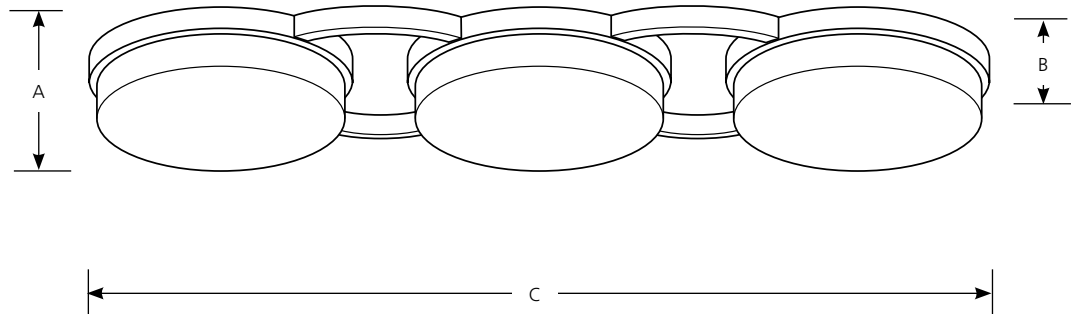

Specifications:

General

- White acrylic diffusers: 11" dia.
- Plated Brushed Nickel (-0930K), Venetian Bronze (-7430K) finishes
- Steel construction
- Complies with "Americans with Disabilities Act" - ADA
- Energy Star® qualified
- LED Module is replaceable
- 5 year warranty
- Matching fixtures P3737, P3747 and P3756

Mounting

- Wall or ceiling mount
- ceiling pancovers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included

Electrical

- Pre-wired

Light Engine

- 17w / 0.15 amps at 120VAC, 60Hz
- Lumens: 1195
- 68.1 lumens per watt
- TM-21 42000 hour life
- 3000K CCT
- 82 CRI
- Dimmable to 10% brightness, see list below for known compatible controls:
 - Lutron: DVCL-153P, MAELV-600, NTELV-300, SPSELV-60
 - Leviton: AWRMG-EAW
 - We do not recommend using digital dimmer controls
 - Compatibility with incandescent dimmers varies by load, due to this factor, we recommend ELV type dimmers for best performance.

Labeling

- cCSAus Damp location listed



Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 07/14