


Type _____
 -30
 PE001 ☐
 PE002 ☐

| Catalog No. | Finish | Letters | Dimensions (Inches) | | |
|-------------|--------|---------|---------------------|-------|-------|
| | White | | A | B | C |
| PE001 | -30 | Red | 12-1/4 | 8-5/8 | 2-1/2 |
| PE002 | -30 | Green | 12-1/4 | 8-5/8 | 2-1/2 |

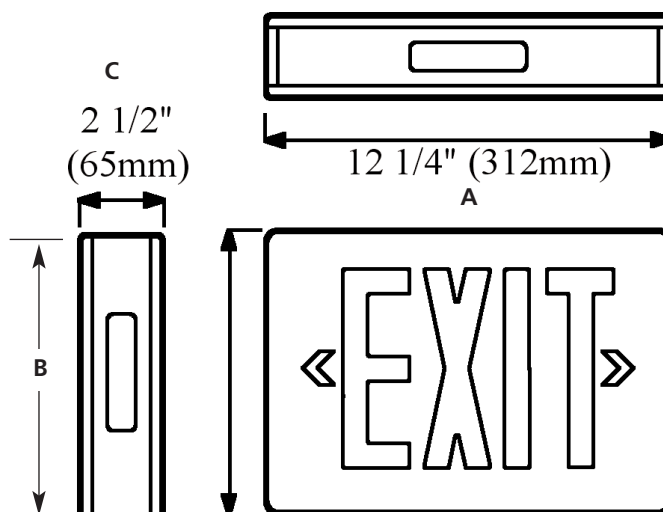

Specifications:

General

- Injected molded white plastic housing with soft corners
- Included snap fit canopy and second face permit top, end or surface mounting
- Single or double face
- Snap fit replaceable chevrons for directional indication
- Long life Light Emitting Diode (LED) lamps provide maximum lamp life and energy savings
- Integral battery pack permits unit to be self powered during power outages
- Ambient temperature range: 0° C (32° F) to 40° C (104° F)

Mounting

- Top, end, or surface mounted
- Snap-in canopy for end or top mounting
- Canopy or housing covers a standard recessed 4" octagonal outlet box.
- Mounting hardware included

Electrical/Battery

- 120/277v dual input
- 2.3W input power
- Sealed Nickel Cadmium battery provides a minimum 1-1/2 hour emergency operation
- Low voltage disconnect prevents deep discharge and maintains battery life
- Automatic solid state charger
- Test switch with LED charge indicator/AC voltage indicator

Labeling

- UL damp location listed
- UL924 listed
- Housing is UL94-5V rated
- Meets Life Safety NFPA 101 requirements