

Quoizel, Inc.  
6 Corporate Parkway  
Goose Creek, SC  
29445

Customer Service  
Phone 631.273.2700  
Fax 631.231.7102  
www.quoizel.com

## Assembly Instruction Sheet #IS-CKSR43525 For Style CKSR43525

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, gloves, safety glasses.

**Bulb Recommended:** None.

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the mirror. Contact customer service for replacement parts.




### Warnings and Cautions

These instructions are provided for your safety. It is very important you read them completely before installing the mirror. We strongly recommend that a licensed, professional electrician perform the installation.

Quoizel recommends 2 people for each step during assembly.

### Package Contents



Part	Description	Quantity
A	Mirror Hanger	2 pcs.
B	Lock Screw	4 pcs.
C	Hanger Nail	4 pcs.
D	Backing with Mirror	1 pc.
E	Mirror Frame	1 pc.

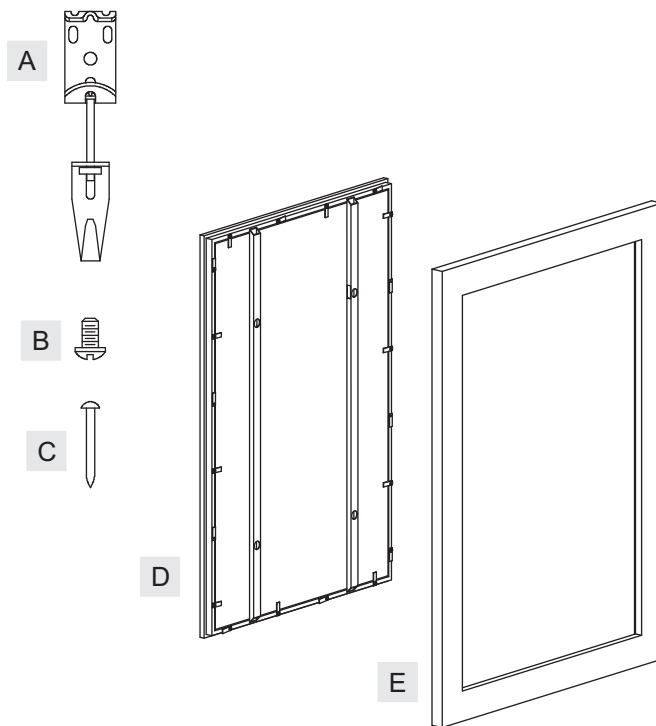

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

CKSR43525

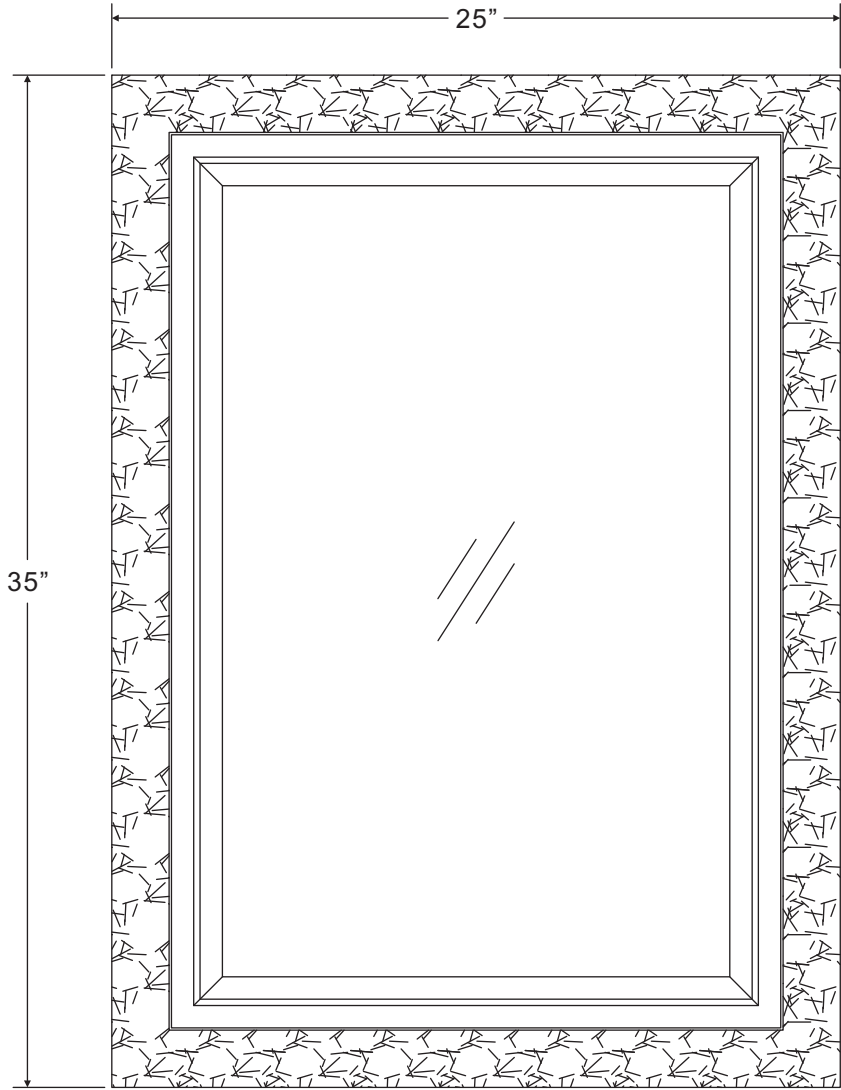

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.

# Assembly Instruction Sheet #IS-CKSR43525

## For Style CKSR43525

### STEP 1 – Assemble the Mirror

- A. Place the Mirror with Backing (D) onto a flat surface with the back of the mirror facing you. Attach the step side of the Mirror Frame (F) onto the back of the Mirror with Backing (D). Once the back of the Mirror with Backing (D) and the back of the Mirror Frame (F) are lined up, rotate the Tabs around the Mirror with Backing (D) to catch the Mirror Frame (F). By using screwdrivers, tighten the Lock Screws on the Backing (D) to secure the Mirror Frame (F).

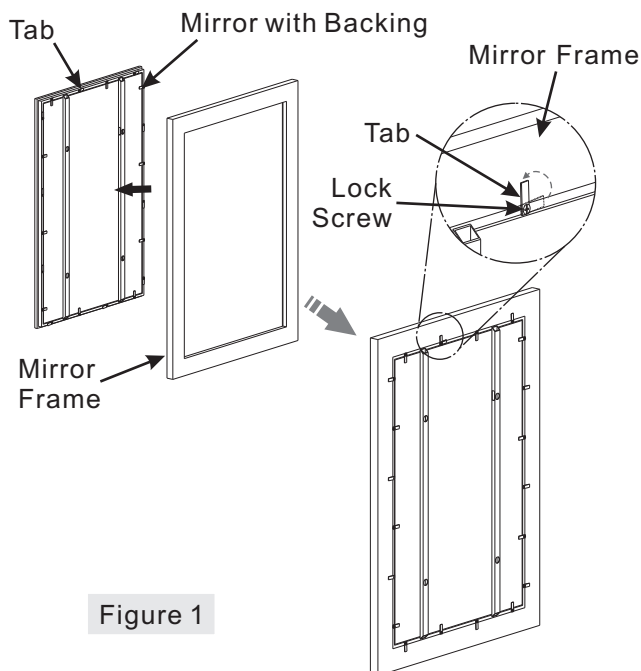


Figure 1

### FOR VERTICAL

### STEP 2 – Mark Points for Mirror Hangers

- A. Determine where the mirror will be placed on the wall and hold the mirror on the wall in the position you wish. This will be Measurement A, the distance from the floor to the bottom of the mirror. Mark this spot on the wall with pencil lightly.
- B. Place the mirror on a flat surface again and measure from the bottom of the mirror to the mounting holes that will be used to hang the mirror, this is measurement B.
- C. Add measurement A from step A above and measurement B together and mark this spot on the wall where the mirror will be hung. Measurement B is straight up from Measurement A you marked on the wall in step A above.
- D. Measure the distance between the center of each mounting hole on the crossbars and then divide this measurement by 2, this is Measurement C. In order to locate the exact mounting hole location on the wall, from Measurement B go to the right the distance of Measurement C and mark the wall. Do this going to the left of Measurement B as well and mark the wall. These two marks are the center of the mounting holes, Measurement C. The two marks you just made on the wall are the same distance apart as the two mounting holes on the crossbars.

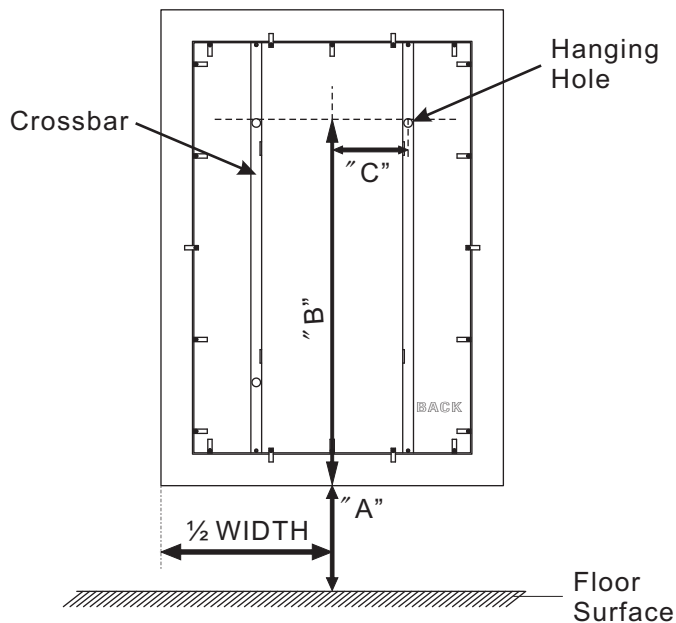


Figure 2

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

# Assembly Instruction Sheet #IS-CKSR43525 For Style CKSR43525

## STEP 3 – Locate the 2 Mirror Hangers

- To determine where the Mirror Hangers (A) will be fastened to the wall, measure up from Measurement C 3". Do this in two locations as illustrated and mark the wall.
- Using the Nails (C) provided with the Mirror Hangers (A) attach the 2 Mirror Hangers (A) to the wall at the position just marked 3" above Measurement C. **Please note the Mirror Hangers are adjustable allowing for easy leveling of the mirror as needed.**
- Once you have both Mirror Hangers (A) securely nailed in place, adjust as the length of the Mirror Hangers (A) so that each Mirror Hanger (A) is the same length.

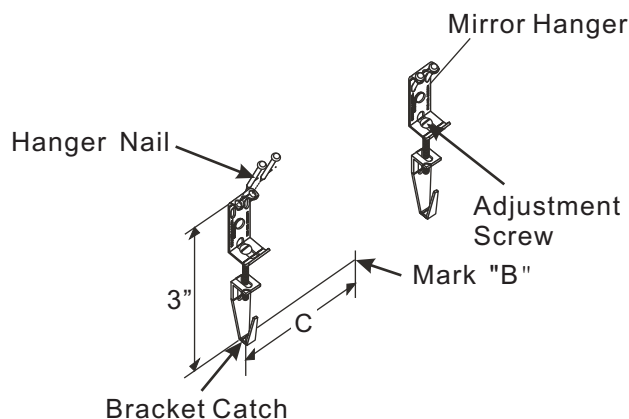


Figure 3

## STEP 4 – Locate the Mirror

- With the help of another person place the mirror onto the mirror hanger hooks. Making sure each hook is securely hooked into the mirror mounting holes before letting go of the mirror.
- If needed you may remove the mirror and adjust the mirror hanger hooks to level the mirror and replace the mirror.

Clean glass with household glass cleaner. Retain this sheet for future reference.

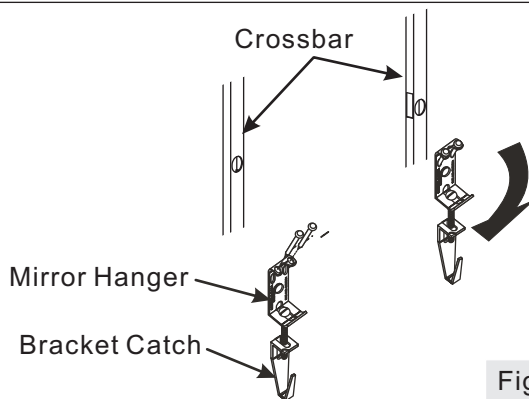


Figure 4

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

# Assembly Instruction Sheet #IS-CKSR43525 For Style CKSR43525

## FOR HORIZONTAL

### STEP 5 – Mark Points for Mirror Hangers

- Determine where the mirror will be placed on the wall and hold the mirror on the wall in the position you wish. This will be Measurement A, the distance from the floor to the bottom of the mirror. Mark this spot on the wall with pencil lightly.
- Place the mirror on a flat surface again and measure from the bottom of the mirror to the mounting holes that will be used to hang the mirror, this is measurement B.
- Add measurement A from step A above and measurement B together and mark this spot on the wall where the mirror will be hung. Measurement B is straight up from Measurement A you marked on the wall in step A above.
- Measure the distance between the center of each mounting hole on the crossbars and then divide this measurement by 2, this is Measurement C. In order to locate the exact mounting hole location on the wall, from Measurement B go to the right the distance of Measurement C and mark the wall. Do this going to the left of Measurement B as well and mark the wall. These two marks are the center of the mounting holes, Measurement C. The two marks you just made on the wall are the same distance apart as the two mounting holes on the crossbars.

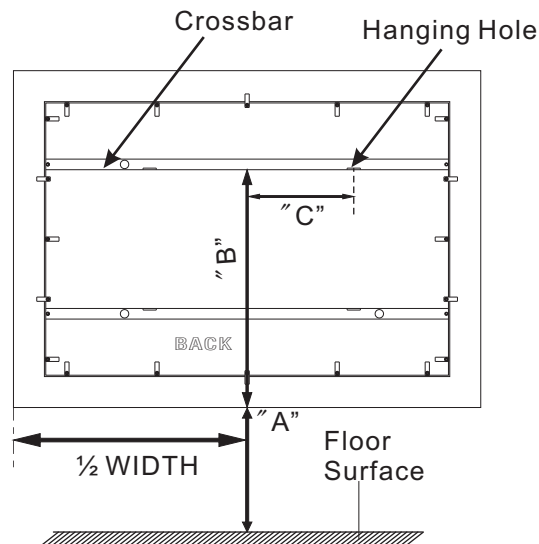


Figure 5

### STEP 6 – Locate the 2 Mirror Hangers

- To determine where the Mirror Hangers (A) will be fastened to the wall, measure up from Measurement C 3". Do this in two locations as illustrated and mark the wall.
- Using the Nails (C) provided with the Mirror Hangers (A) attach the 2 Mirror Hangers (A) to the wall at the position just marked 3" above Measurement C. **Please note the Mirror Hangers are adjustable allowing for easy leveling of the mirror as needed.**
- Once you have both Mirror Hangers (A) securely nailed in place, adjust as the length of the Mirror Hangers (A) so that each Mirror Hanger (A) is the same length.

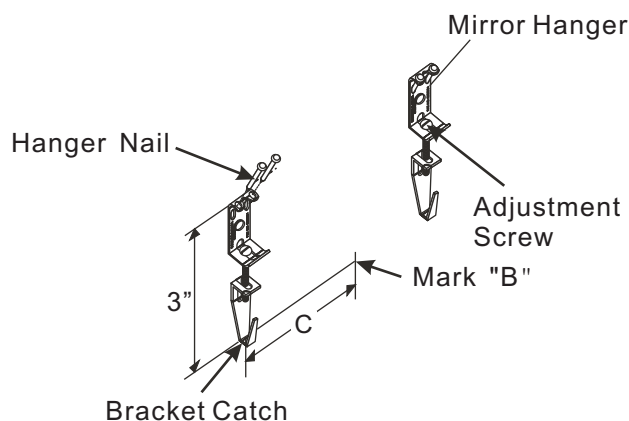


Figure 6

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www. quozel. com](http://www. quozel. com)

# Assembly Instruction Sheet #IS-CKSR43525 For Style CKSR43525

## STEP 7 – Locate the Mirror

- A. With the help of another person place the mirror onto the mirror hanger hooks. Making sure each hook is securely hooked into the mirror mounting holes before letting go of the mirror.
- B. If needed you may remove the mirror and adjust the mirror hanger hooks to level the mirror and replace the mirror.

Clean glass with household glass cleaner. Retain this sheet for future reference.

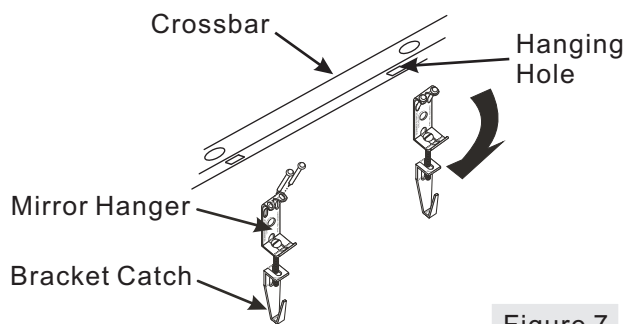


Figure 7

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www. quoizel. com](http://www. quoizel. com)