

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (3) B10 Candelabra Base bulbs 60W Maximum, bulbs not included.

Estimated Assembly Time: 30-45 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to ensure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact your original place of purchase.

Fixture can only be mounted in the direction indicated on page 2.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents




A Crossbar Assembly x 1



B Lock Screw A x 2




C Lock Screw B x 2



D Side Glass Panel x 2



E Front Glass Panel x 2

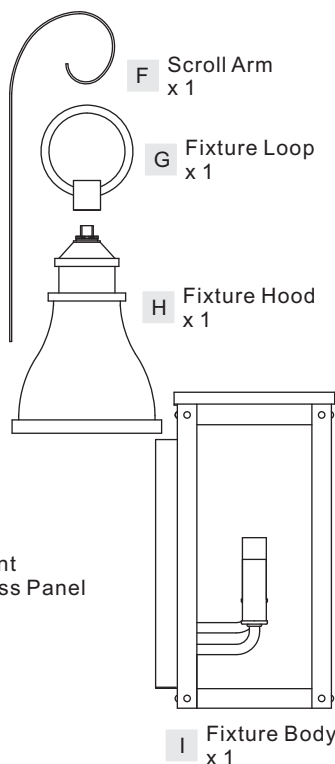

I Fixture Body x 1

F Scroll Arm x 1

G Fixture Loop x 1

H Fixture Hood x 1

STEP 1 – Install Fixture Loop

- A. Thread the Fixture Loop (G) onto the top of the Fixture Hood (H). Hand tighten until snug.




Figure 1

STEP 2 – Install Scroll Arm

- A. Place the scroll end of the Scroll Arm (F) through the loop on the top of the Fixture Hood (H). Align mounting holes on the other ends of the Scroll Arm (F) to holes on the bottom edge of the Fixture Hood (H). Secure them together by using Lock Screws A (B). Hand tighten until snug.
- B. Adjust the Fixture Loop (G) to make sure it is parallel to the Scroll Arm (F).

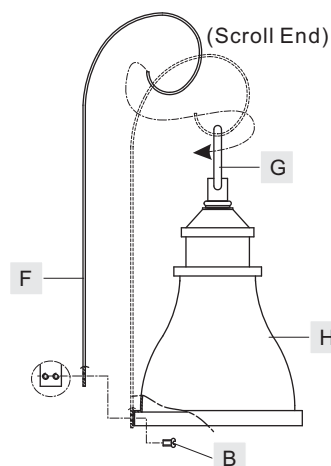


Figure 2

STEP 3 – Install Glass Panels

- A. Insert the Front Glass Panel (E) into the front slot of the Fixture Body (I) first. Secure by pressing tabs on the top edge of the Fixture Body (I) to the top edge of the Front Glass Panel (E).
- B. Insert Side Glass Panels (D) into side slots of the Fixture Body (I). Secure by pressing tabs on the top edge of the Fixture Body (I) to the top edge of Side Glass Panels (D).

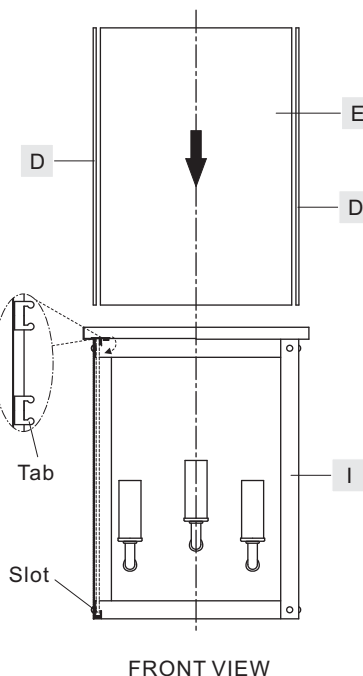


Figure 3

FRONT VIEW

STEP 4 – Install the Crossbar Assembly to Outlet Box and Adjust the length of the Nipple

- Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (not included), tighten until snug.
- Adjust the hex nut and lock washer underside of the crossbar to the middle of the nipple.
- Remove the mounting ball from the nipple. Place the backplate and the Fixture Body (I) over the nipple against the wall to determine the correct position of the nipple. Thread the mounting ball onto the nipple. Adjust the nipple to allow the backplate and the Fixture Body (I) to rest against the wall when held in place by the mounting ball.
- Remove the mounting ball and the Fixture Body (I). Tighten the lock washer and the hex nut against the crossbar to secure in place.

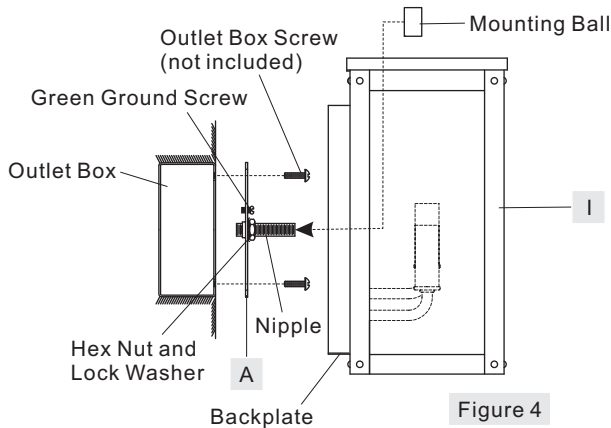


Figure 4

STEP 5 - Wire Connections

- Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
- Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

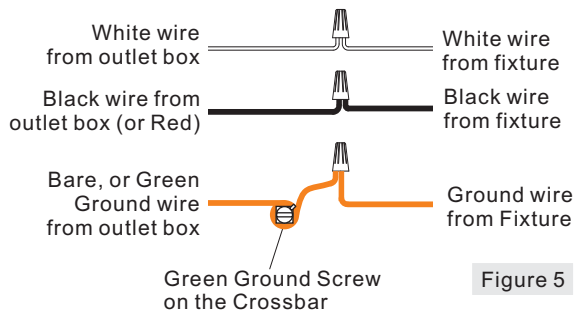


Figure 5

STEP 6 – Install Fixture Body to Crossbar Assembly

- Attach the backplate and the Fixture Body (I) over the end of the nipple and secure with previously removed mounting ball. Hand tighten until snug.

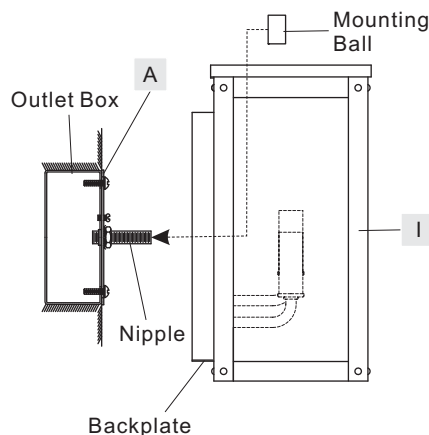


Figure 6

STEP 7 – Install Bulbs and Fixture Hood

- Insert bulbs onto sockets and screw snugly into place.
- Attach the Fixture Hood (H) onto the Fixture Body (I) and secure with Lock Screws B (C). Hand tighten until snug with screwdrivers.

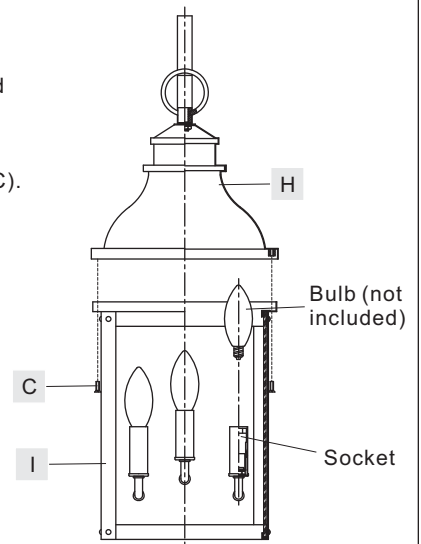


Figure 7

STEP 8 – Apply Silicone Sealer

- Make sure the exterior wall surface and fixture backplate are free of dirt before applying caulk. Using exterior grade caulk, caulk over top of backplate and down both sides. Do not caulk the bottom of the fixture backplate to ensure proper moisture drainage.

Your fixture is now assembled and ready to use. Enjoy!

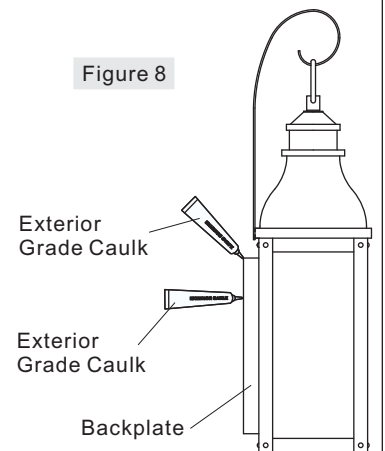


Figure 8

BRS8409AGV

FINISH: AGED VERDE

