

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (3) LED G9 4.5W Bulbs.

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Please go to Quoizel.com to see the G9 LED bulb specifications provided with your fixture.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.


These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


Package Contents



A Crossbar Assembly x 1




B Mounting screw x 2

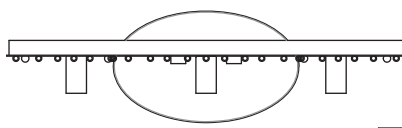



C Fixture Body x 1



D LED G9 Bulb x 3

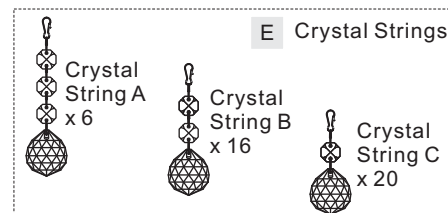

E Crystal Strings



STEP 1 – Install Crossbar Assembly

- A. Pass the supply wires with ground wire from outlet box through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to Outlet Box with the head of Green Ground Screw facing you. Secure it with Outlet Box Screws (not included). Tighten until snug.

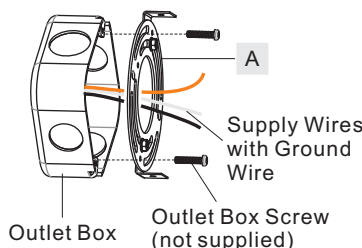


Figure 1

STEP 2 – Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

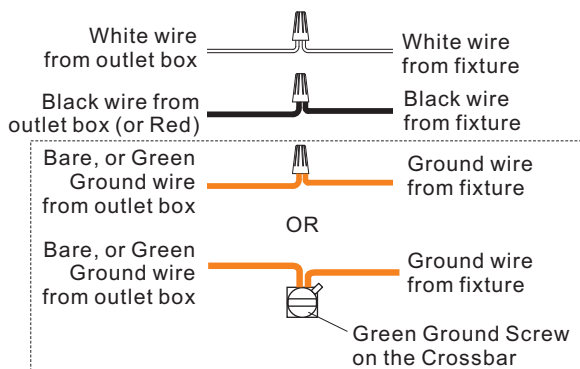


Figure 2

STEP 3 – Install the Fixture Body

- A. Fit excess cord and electrical wires in the backplate properly. Line up the holes on the side of the backplate to the mounting holes on the Crossbar Assembly (A). Secure them with Mounting Screws (B). Tighten until snug.




Figure 3

STEP 4 – Install Crystal Strings and Bulbs

- A. (Refer to CRYSTAL STRINGS DISTRIBUTION) Attach Crystal Strings A to locations "A" on the Fixture Body (C) first. Attach Crystal Strings B to locations "B" on the Fixture Body (C). Attach Crystal Strings C to locations "C" on the Fixture Body (C).
B. Install either the G9 Xenon bulb as specified (not provided) or install the G9 LED bulbs (provided) if the fixture purchased is the LED model.

Note: This fixture is rated to use 50W maximum G9 Xenon bulbs.

Your fixture is now assembled and ready to use. Enjoy!

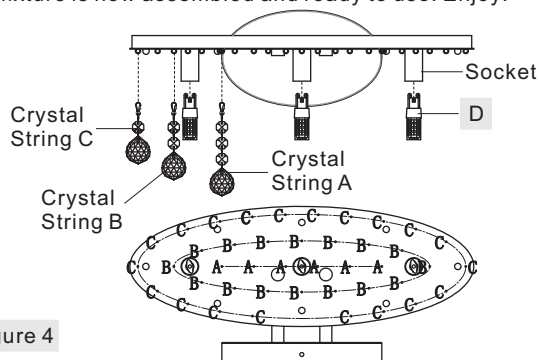



Figure 4

CRYSTAL STRINGS DISTRIBUTIONS



Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoizel.com

BRX8603CLED

FINISH: POLISHED CHROME



NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

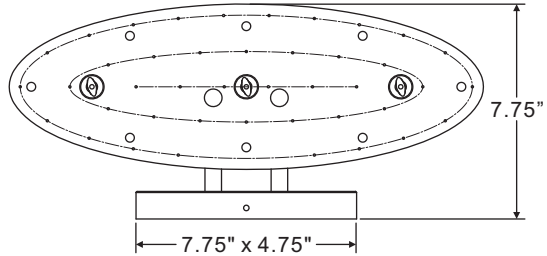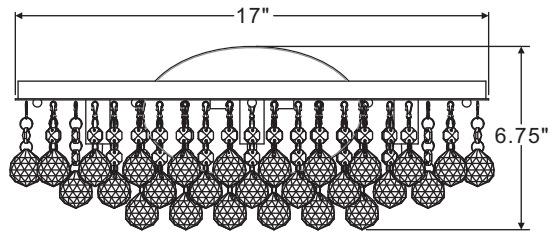

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-800-645-3184
or visit us on-line at www.quoise.com