QUOIZEL

Quoizel, Inc. 6 Corporate Parkway Goose Creek, SC 29445

Customer Service Phone 631,273,2700 Fax 631.231.7102 www.quoizel.com

Assembly Instruction Sheet #IS-MC6793M For Style MC6793M

Tools Required: None.

Bulb Recommended: (2) Medium Base 60W Maximum, Alternate bulb (2) 13W CFL

Estimated Assembly Time: 10-15 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

$oldsymbol{\Delta}$ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


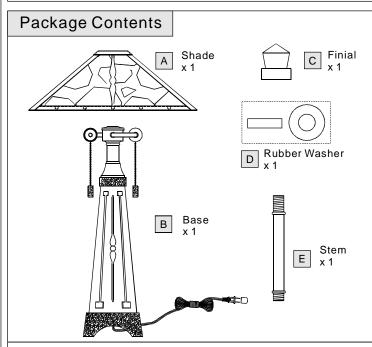


Figure 1


STEP 1 - Install Stem

A. Thread short nipple end of the Stem (E) into the Mounting Hole on the top center of the Base (B). Hand tighten until snug.



STEP 2 - Install Shade


A. Place the Shade (A) and the Rubber Washer (D) over the top end of the Stem (E). Secure by threading the Finial (C) onto the Stem (E). Hand tighten until snug.



STEP 3 - Install Bulb

A. This fixture uses standard bulb with medium base. Maximum 60 watts.

Your fixture is now assembled and ready to use. Enjoy!

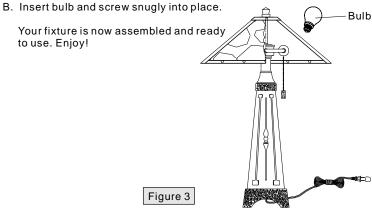

Thank you for purchasing a Quoizel product. Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

