


INSTRUCTION SHEET IS-QR787 STYLE NUMBER: QR787

PACKAGE CONTENTS

ISSUED 07-2009

Part	Description	Quantity
Α	Mirror Hanger	1pc
В	Lock Screw	2pcs
С	Hanger Nail	2pcs
D	Self-tapping Screw	1pc
Е	Holder	2pcs
F	Mirror Frame	1pc
G	Mirror	1pc

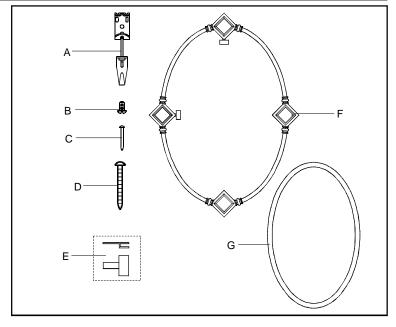



WARNINGS AND CAUTIONS

CAUTION:

• These instructions are provided for your safety. It is very important that they are read completely before the installation of your fixture.


PREPARATION

- Before beginning installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement part.
- Estimated Assembly Time: 15 30 minutes
- Tools Required for Assembly (not included): Flathead screwdriver, Phillips screwdriver, pliers.

ASSEMBLY INSTRUCTION

STEP 1:


- * Quoizel recommends 2 people for each step.
- a. Place the Mirror Frame onto a flat working surface with the back facing you. Carefully locate the Mirror and Backing into the channels on the Holders (Welded on the Frame).
- b. Locate the another two Holders onto the edge of the Mirror and Backing, line up holes on the Holders and mounting holes on the Mirror Frame. Using screwdriver, thread the Lock Screws into the Mounting Holes on the Mirror Frame and hand tighten until snug to secure them together.



FOR VERTICAL


STEP 2:

- a. Lift and position where the Mirror will reside on the wall surface and with a tape measure, mark distance from floor to the bottom edge of the frame with a pencil. Mark should be located at a point representing ½ of mirror width.
- b. Place the Mirror on a flat surface with back facing you. Measure the distance from the bottom edge of the Mirror Frame to Hanger on the bottom of the Mirror Frame. This represents distance "B" in the illustration.
- c. With tape measure, add this distance to Mark "A" on wall surface and mark with pencil.
- d. Measure distance between the Hangers on the top and bottom of the Mirror Frame. With tape measure, add this distance from Mark "B" and mark with pencil. Make sure Mark "B" and Mark "C" are vertical.
- e. Measure 3" up from Mark "C" and mark. These marks are locators for the Mirror Hanger.



STEP 3:

- a. Screw the Self-tapping Screw into the Mark "B" as shown. Please be sure there are proper length left for supporting the Hanger on the bottom of the Frame.
- b. Locate the Mirror Hanger and align the top center with 3" Locator mark. Secure them to wall surface with Hanger Nails. Please be noted that the Mirror Hangers are fully adjustable.



STEP 4:

- a. With the help of another person, pass the Holder on the bottom of the Frame over the Self-tapping Screw and pass the Holder on the top of the Frame over the Mirror Hanger so that the Hanger rests on the inside of the Bracket Catches.
- c. If needed, using Adjustment Screws on Mirror Hanger to achieve the proper hanging height.


STEP 5:

a. Clean glass with household glass cleaner. Retain this sheet for future reference.

FOR HORIZONTAL


STEP 6:

- a. Lift and position where the Mirror will reside on the wall surface and with a tape measure, mark distance from floor to the bottom edge of the frame with a pencil. Mark should be located at a point representing ½ of mirror width.
- b. Place the Mirror on a flat surface with back facing you. Measure the distance from the bottom edge of the Mirror Frame to Hanger on the bottom of the Mirror Frame. This represents distance "B" in the illustration.
- c. With tape measure, add this distance to Mark "A" on wall surface and mark with pencil.
- d. Measure distance between the Hangers on the top and bottom of the Mirror Frame. With tape measure, add this distance from Mark "B" and mark with pencil. Make sure Mark "B" and Mark "C" are vertical.
- e. Measure 3" up from Mark "C" and mark. These marks are locators for the Mirror Hanger.



STEP 7:

- a. Screw the Self-tapping Screw into the Mark "B" as shown. Please be sure there are proper length left for supporting the Hanger on the bottom of the Frame.
- b. Locate the Mirror Hanger and align the top center with 3" Locator mark. Secure them to wall surface with Hanger Nails. Please be noted that the Mirror Hangers are fully adjustable.



STEP 8:

- a. With the help of another person, pass the Holder on the bottom of the Frame over the Self-tapping Screw and pass the Holder on the top of the Frame over the Mirror Hanger so that the Hanger rests on the inside of the Bracket Catches.
- c. If needed, using Adjustment Screws on Mirror Hanger to achieve the proper hanging height.

STEP 9:

a. Clean glass with household glass cleaner. Retain this sheet for future reference.