

Quoizel, Inc.
6 Corporate Parkway
Goose Creek, SC
29445

Customer Service
Phone 631.273.2700
Fax 631.231.7102
www.quoizel.com

Assembly Instruction Sheet #IS-TF135TBC For Style TF135TBC

Tools Required: None

Bulb Recommended: (3) Medium Base Bulbs 75W Maximum

Estimated Assembly Time: 15-20 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents

Part	Description	Quantity
A	Nipple (5 1/4"L) with Knurled Nuts	1 pc.
B	Socket Assembly	1 pc.
C	Base	1 pc.
D	Finial	1 pc.
E	Shade	1 pc.
F	Check Ring	1 pc.
G	Spacer Tube 3/4"D x 5"L	1 pc.

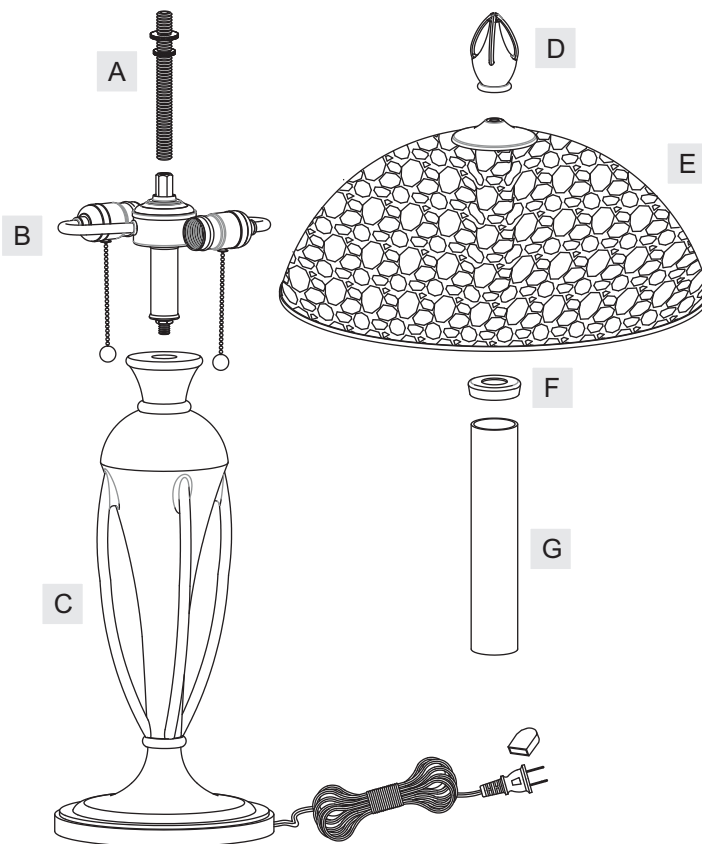


Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

TF135TBC

FINISH: BURNT CINNAMON

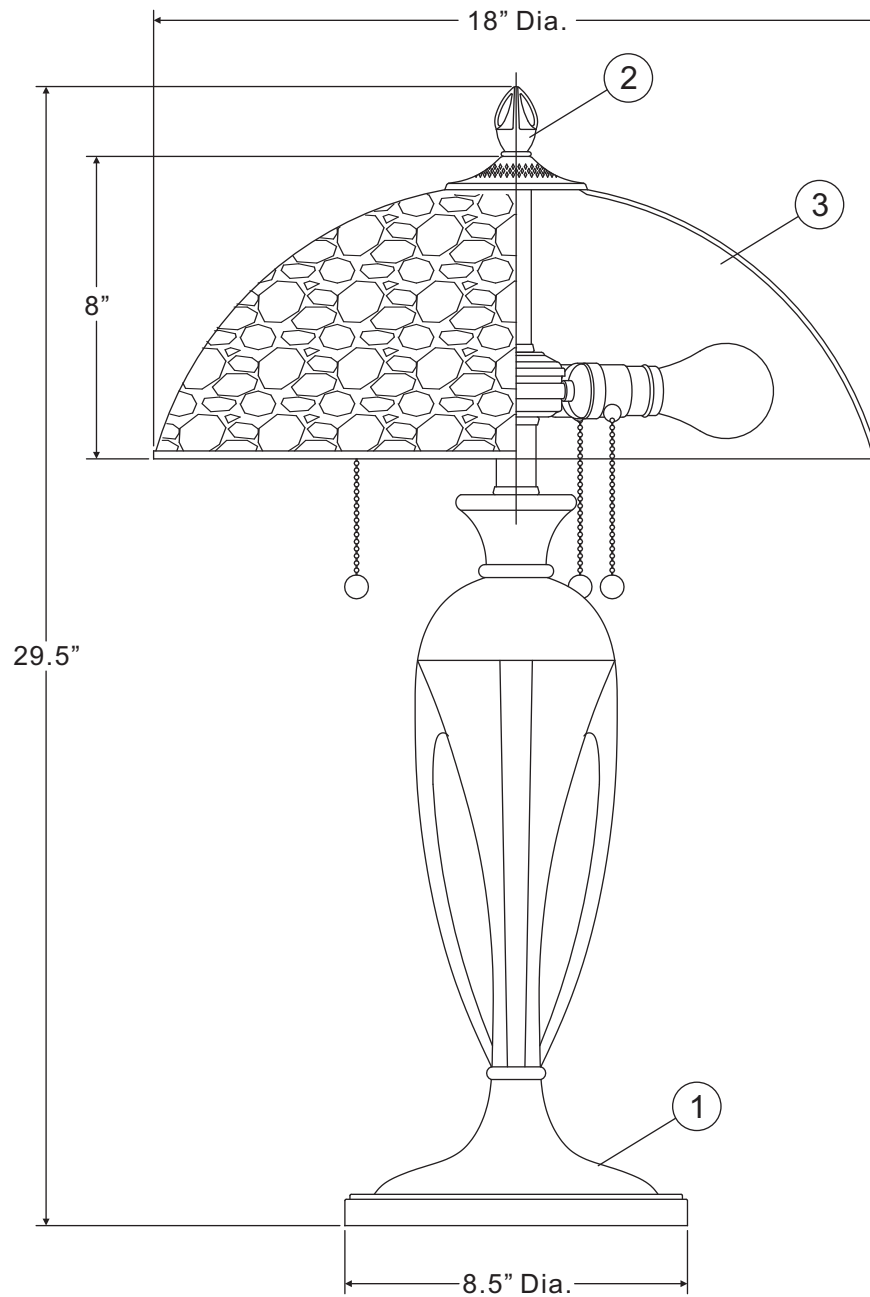

(3) 75W Medium
Base Bulbs
(Not Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	1135TBCT	BASE BURNT CINNAMON TABLE LAMP	1
2	M1462FIBC	FINIAL BURNT CINNAMON 1.75H X 1D	1
3	G8031SH	GLASS TIFFANY REPLACEMENT TF135T-FBC	1

Assembly Instruction Sheet #IS-TF135TBC

For Style TF135TBC

STEP 1 – Install the Socket Assembly

- A. Thread the Socket Assembly (B) onto the Base (C).
Hand tighten until snug.

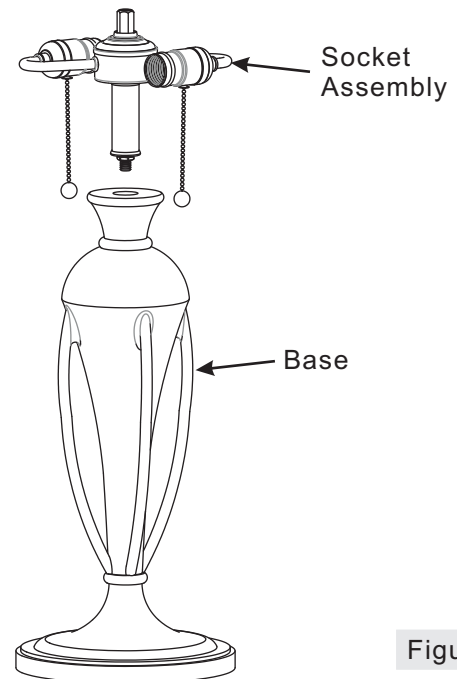


Figure 1

STEP 2 – Install the Nipple

- A. Remove the Knurled Nuts from the Nipple (A). Thread one end of the Nipple (A) into Hex Coupling on the top center of the Socket Assembly (B). Hand tighten until snug.

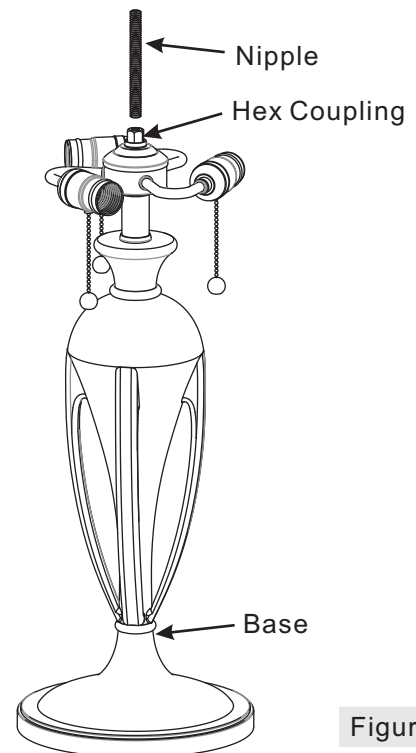


Figure 2

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

Assembly Instruction Sheet #IS-TF135TBC

For Style TF135TBC

STEP 3 – Install the Spacer and the Check Ring

- Place the Spacer (G) and the Check Ring (F) over the top end of the Nipple (A). Secure by threading the removed Small Knurled Nut back onto the Nipple (A). Hand tighten until snug.
- Thread the Big Knurled Nut back onto the Nipple (A) and adjust it to proper location for the Shade (E) and the Finial (D).

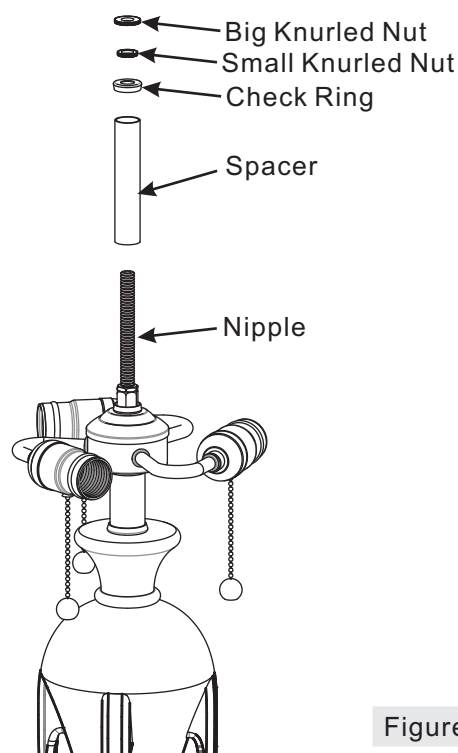


Figure 3

STEP 4 – Assemble Shade

- Place the Shade (E) over the top end of the Nipple (A) and secure with the Finial (D). Hand tighten until snug.

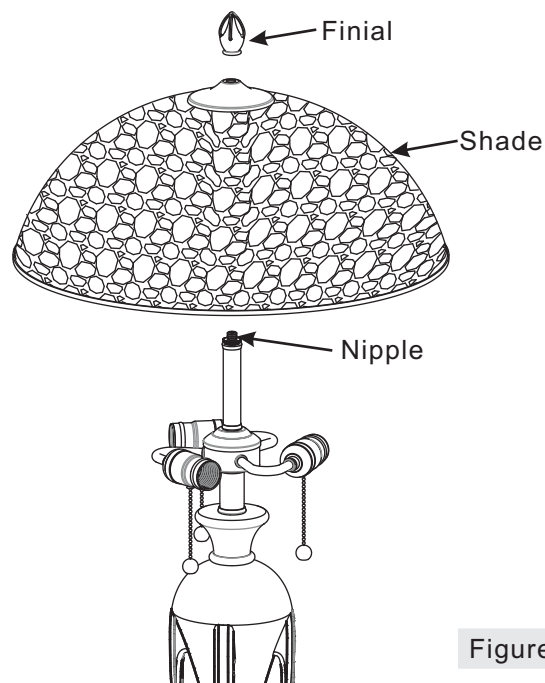


Figure 4

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

Assembly Instruction Sheet #IS-TF135TBC For Style TF135TBC

STEP 5 – Install Bulb

- A. This fixture uses standard bulbs with medium screw bases. Maximum 75 watts.
- B. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

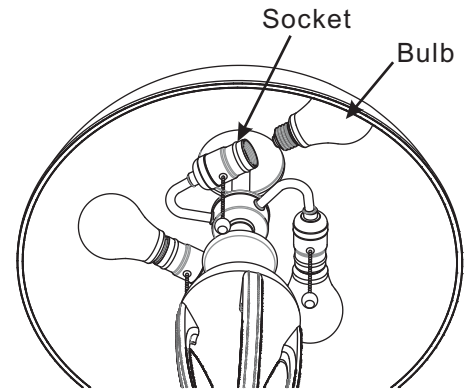


Figure 5

Thank you for purchasing a Quoizel product.

**Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quoizel. com**