


ASSEMBLY INSTRUCTIONS FOR YOUR BINARY SCONCE

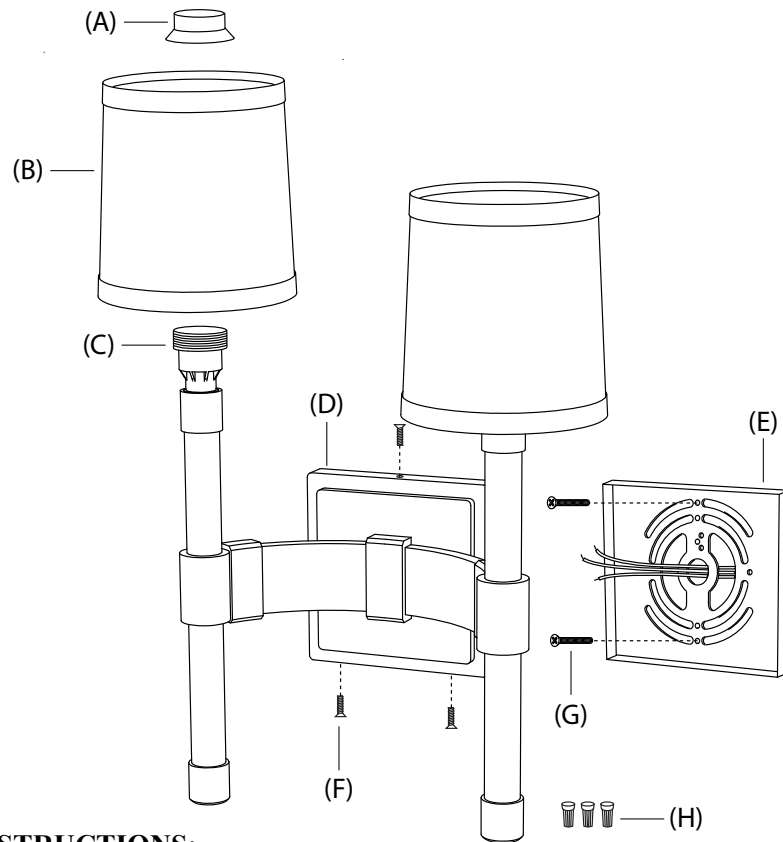

IMPORTANT SAFETY INSTRUCTIONS:

- *These instructions are provided for your safety. It's important that all safety instructions are read before beginning fixture installation.
- *We **STRONGLY** recommend installation by a licensed electrician.
- *Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- *Do not connect the electricity until lamp is fully assembled.

ASSEMBLY INSTRUCTIONS:

1. SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER. IT IS RECOMMENDED THAT A LICENSED ELECTRICIAN INSTALL THIS FIXTURE.
2. Remove mounting plate (E) from backplate (D) by removing screws (F). Set screws (F) aside.
3. Carefully pull the wiring from wall outlet box. Thread the wires through the center hole in mounting plate (E).
4. Affix mounting plate (E) to wall outlet box with mounting screws (G) provided.
5. Make proper electrical connections described in steps 6 - 8. A LICENSED ELECTRICIAN IS RECOMMENDED.
6. Connect ground wire from fixture (green or silver in color) to ground wire in the outlet box. Fasten wires together with wire nut (H) and tightly wrap the connection with electrical tape.
7. Attach hot wire from fixture (black in color or smooth side of wire) to hot wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape.
8. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from outlet box. Fasten wires together with wire nut (H) and tightly wrap connection with electrical tape. Carefully push wire connections back into wall outlet box.
9. Slide backplate (D) over mounting plate (E). Thread screws (F) into vacant holes at the top and bottom of backplate (D) to secure the fixture to the mounting surface.
10. Remove flange (A) from threaded socket (C).
11. Place shade (B) onto threaded socket (C).
12. Thread flange (A) onto socket (C) to secure the shade to the fixture.
13. Insert two (2) 60W MAX. B10.5 Candelabra base bulbs into sockets.
14. Reconnect main electrical supply at the fuse box/circuit breaker and test the fixture.

** To clean, use a soft dry cloth. Do not use any chemical or abrasive cleaners as they may damage the finish. **