


ASSEMBLY INSTRUCTIONS FOR YOUR

**Jonathan Adler**

**MEURICE 30 LIGHT CHANDELIER**



**\*\*IT IS RECOMMENDED THAT A CERTIFIED LICENSED ELECTRICIAN INSTALL THIS FIXTURE\*\***

\*\*\*\*\*

**Warning: If any special control devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a qualified electrical contractor.**


\*\*\*\*\*

**Assembly Instructions**

SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.

Caution: To clean, use a soft cloth only. Do not use any chemical or abrasive cleaners.

1. Remove all parts carefully from the box.
2. Unthread nipple (C) from hang straight (F). Do not remove cross bar (A) from threaded nipple (C).
3. Affix cross bar (A) to "J BOX" using screws (B) provided.
4. Measure desired drop for fixture to hang from "J BOX." Add/remove extension tubes (I) accordingly. Once desired extension tube (I) length is reached, guide wiring from housing (J) through extensions (I) being observant not to cut wiring. Thread bottom extension tube (I) onto threaded nipple of housing (J). Wiring will protude out of the top extension tube (I).
5. If removed, guide wiring through center hole of loop (H) and thread loop (H) onto top threading opening of extension tube (I). Thread collar (E) down hang straight (F) until collar (E) rest on loop of hang straight (F). Place center hole of canopy (D) over hang straight (F) and slide canopy (D) down hang straight (F) and let rest on collar (E).
6. Lift fixture to "J BOX" and guide wiring through center hole of threaded nipple (C).
7. Make proper electrical connection. A licensed electrician is recommended.
8. Connect the grounding wire (silver) from the fixture to the grounding wire in the outlet box (copper, green, or silver). Connect the black wire of the fixture (or smooth side of the wire) to the black wire in the outlet box. Connect the white wire of the fixture (or rough side of the wire) to the white wire in the outlet box.
9. Thread hang straight (F) onto threaded nipple (C). Hold canopy (D) tightly against the ceiling. Thread collar (E) up hang straight (F) to secure position of canopy (D).
10. Install thirty (30) Type B, maximum 25 watt bulbs into the sockets. Round candelabra (Type B) bulbs are recommended.

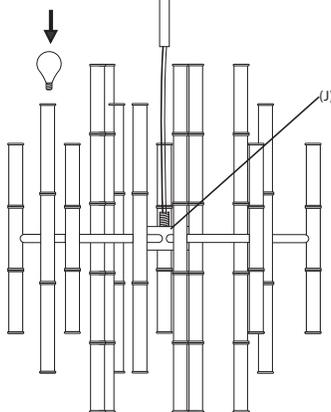

**Caution when using a wall dimmer:** To avoid a risk of fire do not exceed the maximum wattage output of the dimmer. A dimmer rated at least 750 watts is recommended for this fixture when using 25 watt bulbs.