

ASSEMBLY INSTRUCTIONS FOR YOUR

Jonathan Adler


MEURICE LARGE PENDANT

IMPORTANT SAFETY INSTRUCTIONS:

- *These instructions are provided for your safety.
- *It is very important that they are read completely before beginning the installation of your fixture.
- *WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
- *Turn off power at switch before replacing bulbs, making sure fixture has had sufficient time to cool down.
- *DO NOT subject the fixture to any shock while lit as shattering of bulbs may result.
- *To clean, use soft dry cloth only. Do not use any chemical or abrasive cleaners as they may damage the finish.

ASSEMBLY INSTRUCTIONS

* SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.

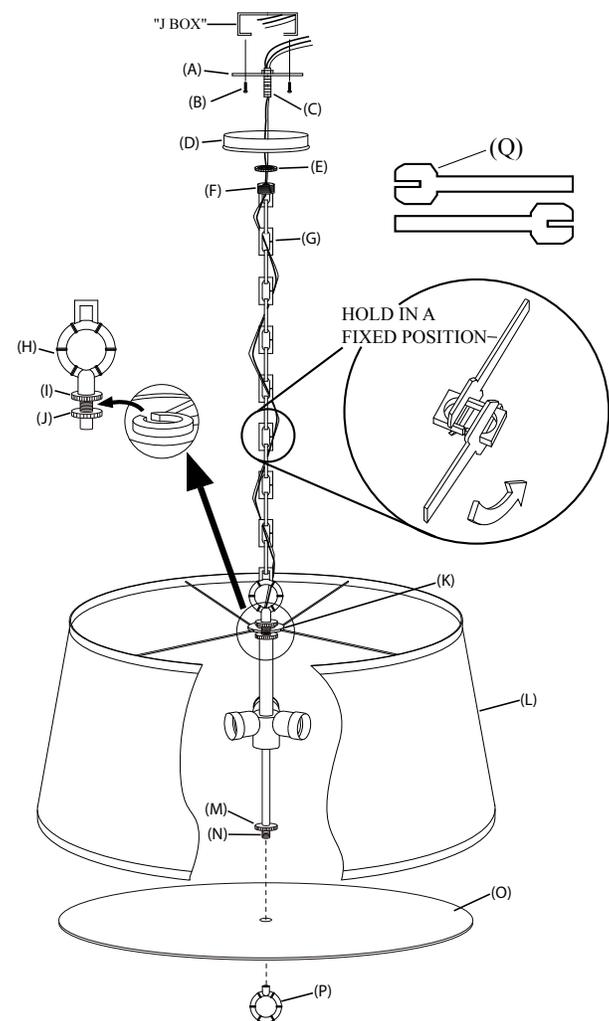

1. Remove all parts carefully from the box.
2. Unthread nipple (C) from hang straight (F). Do not remove cross bar (A) from threaded nipple (C).
3. Affix cross bar (A) to "J BOX" using screws (B) provided.
4. Measure desired drop for fixture to hang from J BOX. Using chain break (Q) remove links in chain (G) to achieve desired drop. To open chain links (recommend using a soft cloth to cover the link), place a cloth around the link and sliding one of the chain break forks (Q) onto the link. Slide the second fork onto the link with the handles facing the opposite directions (see diagram). The backstop of the chain break fork (Q) MUST rest against the link while applying force to prevent damage to the link. Holding one chain break fork (Q) in a fixed position, rotate the second chain break fork (Q) to open the link. Do not rotate the link more than 45 degrees. Rotate open link in chain (G) to a closed position to secure fixture.
5. Guide wiring from loop (H) through chain loops (G). Guide wiring through center hole in hang straight (F), collar (E), and through center hole in canopy (D).
6. Thread collar (E) down hang straight (F) and slide down chain links (G) to rest on loop (H).
7. Slide center hole of canopy (D) down hang straight (G) and chain links (G) to rest on loop (H).
8. Holding fixture by hang straight (F), lift fixture to threaded nipple (C). Guide wiring through center hole in threaded nipple (C). Pull wiring until hang straight (F) and threaded nipple (C) are touching. Thread hang straight (F) onto threaded nipple (C).
9. Make proper electrical connection. A licensed electrician is recommended.
10. Connect the grounding wire (silver) from the fixture to the grounding wire in the outlet box (copper, green, or silver). Connect the black wire of the fixture (or smooth side of the wire) to the black wire in the outlet box. Connect the white wire of the fixture (or rough side of the wire) to the white wire in the outlet box.
11. Hold canopy (D) tightly against the ceiling. Thread collar (E) up hang straight (F) to secure position of canopy (D).
12. Slide shade (L) up bottom section of fixture. Slide washer (K) of shade spider into the opening between washer (I) and washer (J). Secure position of shade (L) by threading washer (J) tightly against washer (K).
13. Install three (3) Type A, maximum 100 watt bulbs into the sockets.
14. Align center hole in diffuser (O) with threaded nipple (N). Slide diffuser up threaded nipple (N) and hold firmly against washer (M). Thread finial (P) onto threaded nipple (N) to secure position of diffuser (O).