


ASSEMBLY INSTRUCTIONS FOR YOUR BLING FLUSHMOUNT

IMPORTANT SAFETY INSTRUCTIONS:

- *These instructions are provided for your safety. It's important that they're read completely before beginning installation of fixture.
- *DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.
- *Turn the power to fixture off before replacing bulbs, making sure the bulbs have sufficient time to cool down. Do not subject the fixture to any shock while lit as shattering of bulbs may result.

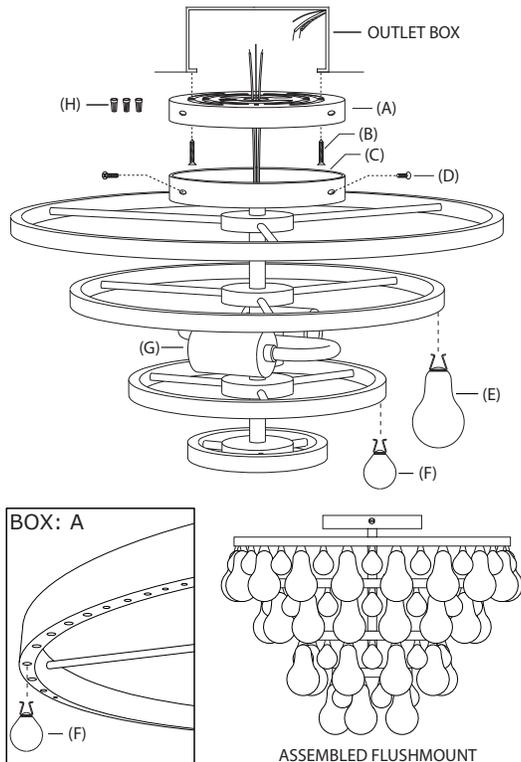

ASSEMBLY INSTRUCTIONS

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Remove all parts from carton. Do not throw away any parts.
3. Remove mounting plate (A) from canopy (C) by removing screws (D).
4. Carefully pull wiring from outlet box. Thread wires through center hole in mounting plate (A).
5. Affix mounting plate (A) to outlet box using screws (B), provided.
6. Lift canopy (C) to outlet box and make proper electrical connections described in steps 7 - 9.
7. Connect ground wire from fixture to ground wire in outlet box. Fasten wires together with wire nut (H) and wrap connection with electrical tape.
8. Attach hot wire from fixture to hot wire from outlet box. Fasten wires together with wire nut (H) and wrap connection with electrical tape.
9. Attach neutral wire from fixture to neutral wire from outlet box. Fasten wires together with wire nut (H) and wrap connection with electrical tape.
10. Carefully push wire connections back through hole in the center of mounting plate (A). Slide canopy (C) over mounting plate (A). Thread screws (D) into vacant holes in canopy (C) to secure fixture to ceiling.
11. Install two (2) 60W max. Type B11, medium base bulbs into sockets (G).

CARE INSTRUCTIONS:

- *To clean, use a soft cloth only. DO NOT use chemical or abrasive cleaners.
- *White gloves have been shipped with each fixture. Please wear gloves to keep the components clean during installation.

GLASS DROP INSTALLATION:

- **It is recommended that needle nose pliers (not included) be used when installing small glass drops (F).**
 - **It is recommended that the glass drops (E & F) be installed on the smallest tier first, continuing upward to the larger tiers.
 - **Reference the "Assembled Flushmount" illustration above for glass drop (E & F) orientation.**
1. Remove packaging from glass drops (E & F). NOTE: The fixture is designed to have alternating size glass drops (E & F) on each tier.
 2. Start with a large glass drop (E). Notice the metal connection attached to each glass drop has a large and small side. Please see images below for reference. Insert the larger connection side into a hole in the metal tier. With your index finger guide the smaller connection side into the hole securing glass drop (E) to the metal tier. NOTE: A small amount of adjustment maybe needed for each drop to hang straight.
 3. Needle nose pliers are recommended when installing small glass drops (F).
 4. Locate the large and small connection side of the small glass drop (F). Firmly hold the vertical section (smaller connection side) of the metal connection with the needle nose pliers (see images below for reference). Insert the large connection side (same procedure as the large glass drop (E)) into the hole on the left/right side of installed large glass drop (G). Using the pliers insert the small connection side into the hole securing glass drop (F) to the band.
 5. Repeat steps 2 and 4 for each band until all glass drops (E & F) are installed.

