



BLINK™ LED FIXTURES



**Sleek design.
LED efficiency.
Easy installation.**

Meet Blink

So simple, so innovative, and perfect for so many projects. That's Blink. Sleek, efficient and easy to install. Blink again. It's the LED fixture you always needed with the features you always wanted.



Blink LED fixtures come in the sizes, shapes, finishes and specifications that make solving most any lighting problem easy. No room for a recessed can fixture? No problem. If there's only a 3" or 4" junction box or a pancake box to work with, mounting is simple, and Blink is your LED lighting solution. And there's no need for a fire box enclosure. Blink's ultra-sleek design – only 1" deep – makes it the answer for all those hard to light spaces.



From dramatic to functional...

Blink is perfectly suited for both residential and commercial applications. Light an office or conference room properly for better working conditions, or dim a restaurant lounge area for the right mood. It's hard to find a space that wouldn't benefit from Blink fixtures.

Blink offers more than just energy savings. Its dimmable and its wide, 108° beam pattern and edge-lit LED technology means less fixtures to install. It's perfect for kitchens, bathrooms, hallways, family rooms, even garages. And virtually any kind of commercial space--offices buildings, hotels, restaurants, condominiums and apartments, in conference rooms, hallways, entry ways, bar and lounge areas, and stairwells can benefit from the energy savings and lower maintenance costs Blink LEDs deliver.

The opportunities are endless

There's almost no limit to the ways Blink can add dramatic affects, efficiency and safety to any residence or complex--and do it cleanly and simply.





With so many sizes, wattages, color temperatures and finishes to choose from, finding a Blink LED fixture for most any installation is easy.

Choosing the right Blink is easy


Blink is available in 5.5", 7" and 9" square or round models and all are available in White, Brushed Nickel or Bronze finishes. And all models are ENERGY STAR certified.



Battery backup modules – added security where you need it most

Blink battery backup modules are designed to work with the 7" round or square models, are available in White and come with a 3rd wire for switched applications.

Blink battery backup modules add a level of security to an already versatile product. This advanced module features 90 minutes of operation from the battery, and is self-charging with a 24 hour recharge time and overcharge/discharge protection. It has a 1-second switching time, self-checking function and a test button. Battery backup modules are perfect for critical locations in any home or commercial establishment where an extra measure of safety is needed or required.

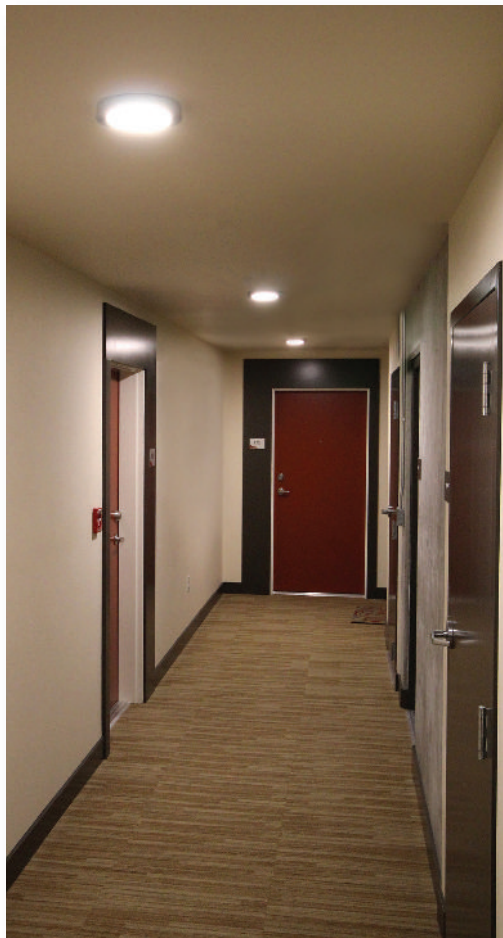

Wet location?

The Blink wet locations models make lighting bathrooms and other damp locations easy. All the necessary certifications are in place allowing for installation almost anywhere. The wet location models are available in 7" round, 7" square and 9" square, all finished in White.

No problem.



Blink LED fixtures

Features at a glance

- Dimmable**
- Damp location listed
- Available in White, Brushed Nickel, and Bronze
- Mounts directly to 3" and 4" junction boxes
- ENERGY STAR® certified as indicated
- 5 year limited warranty***

** Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

*** See separate warranty for complete terms and conditions.

5.5" LED round fixtures



S9320, S9323



S9321



S9322

5.5" LED Round Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9320*	10.5W/LED/5.5FLUSH/27K/RD/WH	10.5	120	White	↑80	2700K	580	108°	1	40,000
S9321*	10.5W/LED/5.5FLUSH/27K/RD/BN	10.5	120	Br. Nickel	↑80	2700K	580	108°	1	40,000
S9322*	10.5W/LED/5.5FLUSH/27K/RD/BRZ	10.5	120	Bronze	↑80	2700K	580	108°	1	40,000
S9323*	10.5W/LED/5.5FLUSH/30K/RD/WH	10.5	120	White	↑80	3000K	600	108°	1	40,000

Pack: Master 12/1

5.5" LED square fixtures



S9324, S9327



S9325



S9326

5.5" LED Square Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9324*	10.5W/LED/5.5FLUSH/27K/SQ/WH	10.5	120	White	↑80	2700K	560	108°	1	40,000
S9325*	10.5W/LED/5.5FLUSH/27K/SQ/BN	10.5	120	Br. Nickel	↑80	2700K	560	108°	1	40,000
S9326*	10.5W/LED/5.5FLUSH/27K/SQ/BRZ	10.5	120	Bronze	↑80	2700K	560	108°	1	40,000
S9327*	10.5W/LED/5.5FLUSH/30K/SQ/WH	10.5	120	White	↑80	3000K	580	108°	1	40,000

Pack: Master 12/1

7" LED round fixtures



S9328, S9331, S9360, S9364, S9367



S9329



S9330

7" LED Round Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9328*	13.5W/LED/7FLUSH/27K/RD/WH	13.5	120	White	↑80	2700K	800	108°	1	40,000
S9329*	13.5W/LED/7FLUSH/27K/RD/BN	13.5	120	Br. Nickel	↑80	2700K	800	108°	1	40,000
S9330*	13.5W/LED/7FLUSH/27K/RD/BRZ	13.5	120	Bronze	↑80	2700K	800	108°	1	40,000
S9331*	13.5W/LED/7FLUSH/30K/RD/WH	13.5	120	White	↑80	3000K	820	108°	1	40,000
S9360*	13.5W/LED/7FLUSH/50K/RD/WH	13.5	120	White	↑80	5000K	900	108°	1	40,000

Wet Location / 90 CRI

S9364*	13.5W/LED/7FLUSH/30K/RD/WH/90CRI	13.5	120	White	↑90	3000K	700	108°	1	40,000
--------	----------------------------------	------	-----	-------	-----	-------	-----	------	---	--------

0-10V Dimming

S9367*	13.5W/LED/7FLUSH/30K/RD/WH/0-10VD	13.5	120	White	↑80	3000K	820	108°	1	40,000
--------	-----------------------------------	------	-----	-------	-----	-------	-----	------	---	--------

Pack: Master 12/1


7" LED square fixtures



S9332, S9335, S9361, S9366



S9333



S9334

7" LED Square Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9332*	13.5W/LED/7FLUSH/27K/SQ/WH	13.5	120	White	↑80	2700K	780	108°	1	40,000
S9333*	13.5W/LED/7FLUSH/27K/SQ/BN	13.5	120	Br. Nickel	↑80	2700K	780	108°	1	40,000
S9334*	13.5W/LED/7FLUSH/27K/SQ/BRZ	13.5	120	Bronze	↑80	2700K	780	108°	1	40,000
S9335*	13.5W/LED/7FLUSH/30K/SQ/WH	13.5	120	White	↑80	3000K	800	108°	1	40,000
S9361*	13.5W/LED/7FLUSH/50K/SQ/WH	13.5	120	White	↑80	5000K	880	108°	1	40,000

Wet Location / 90 CRI

S9366*	13.5W/LED/7FLUSH/30K/SQ/WH/90CRI	13.5	120	White	↑90	3000K	680	108°	1	40,000
--------	----------------------------------	------	-----	-------	-----	-------	-----	------	---	--------

Pack: Master 12/1

9" LED round fixtures



S9336, S9339, S9362



S9337



S9338


9" LED Round Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/ Hours
S9336*	18.5W/LED/9FLUSH/27K/RD/WH	18.5	120	White	↑80	2700K	1150	108°	1	40,000
S9337*	18.5W/LED/9FLUSH/27K/RD/BN	18.5	120	Br. Nickel	↑80	2700K	1150	108°	1	40,000
S9338*	18.5W/LED/9FLUSH/27K/RD/BRZ	18.5	120	Bronze	↑80	2700K	1150	108°	1	40,000
S9339*	18.5W/LED/9FLUSH/30K/RD/WH	18.5	120	White	↑80	3000K	1200	108°	1	40,000
S9362*	18.5W/LED/9FLUSH/50K/RD/WH	18.5	120	White	↑80	5000K	1300	108°	1	40,000

Pack: Master 12/1


9" LED square fixtures

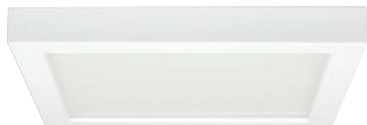

S9340, S9343, S9363, S9365



S9341

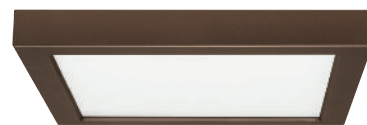

S9342

9" LED Square Fixture



Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/ Hours
S9340*	18.5W/LED/9FLUSH/27K/SQ/WH	18.5	120	White	↑80	2700K	1100	108°	1	40,000
S9341*	18.5W/LED/9FLUSH/27K/SQ/BN	18.5	120	Br. Nickel	↑80	2700K	1100	108°	1	40,000
S9342*	18.5W/LED/9FLUSH/27K/SQ/BRZ	18.5	120	Bronze	↑80	2700K	1100	108°	1	40,000
S9343*	18.5W/LED/9FLUSH/30K/SQ/WH	18.5	120	White	↑80	3000K	1150	108°	1	40,000
S9363*	18.5W/LED/9FLUSH/50K/SQ/WH	18.5	120	White	↑80	5000K	1250	108°	1	40,000

Wet Location / 90 CRI


S9365*	18.5W/LED/9FLUSH/30K/SQ/WH/90CRI	18.5	120	White	↑90	3000K	960	108°	1	40,000
--------	----------------------------------	------	-----	-------	-----	-------	-----	------	---	--------

Pack: Master 12/1

Blink LED rectangular fixtures



S9368 (5" x 18")

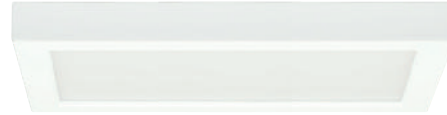

S9369 (7" x 18")



5" x 18" LED Rectangular Fixture

Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9368†	16W/LED/18"FLUSH/30K/90CRI/REC	16	120	White	↑90	3000K	950	108°	1	40,000

7" x 18" LED Rectangular Fixture

Item Number	Lamp Description	Watts	Volts	Finish	CRI	CCT	Lumens	Beam	M.O.L. (Inches)	Life/Hours
S9369†	24W/LED/18"FLUSH/30K/90CRI/REC	24	120	White	↑90	3000K	1300	108°	1	40,000

† ENERGY STAR Nov. '15

Pack: Master 6/1

Blink battery back up modules

Features at a glance

- 24 hour recharge time
- 90 minute operation from battery
- Switching time: < 1 second
- Over-charge / discharge protection
- Self-checking function
- Test button

7" battery back up



S9344, S9346



S9345, S9347



7" LED Round Battery Back Up

Item Number	Description
S9344	7" Round Battery Back Up
S9346	7" Round Battery Back Up - Empty Casing (Used to maintain consistent appearance with Blinks utilizing the battery back up)

7" LED Square Battery Back Up


Item Number	Description
S9345	7" Square Battery Back Up
S9347	7" Square Battery Back Up - Empty Casing (Used to maintain consistent appearance with Blinks utilizing the battery back up)

Battery back up module and Blink fixture sold separately.

Pack: Master 12/1

Blink technology-- simplicity is only skin deep

Blinks clean, simple design and thin profile belies the advanced technologies inside. The edge-lit LED design provides even, efficient light over a wide area through a laminated light guide assembly made of high quality polymer for the highest efficiency and safety. And advanced, on-board IC direct drive technology means there are no external drivers allowing for Blink's sleek design and making wiring easy.

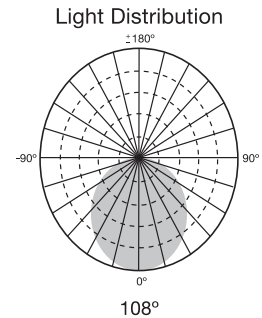

On-board IC drive technology –
no external driver needed



Edge-lit design eliminates hot spots
and provides even light output



Laminated light guide assembly for consistent light
dispersion, (glass, pattern disk and diffuser)

Installation is easy

Blink LED fixtures mount easily to any 3" or 4" junctions box. The Blink quick connect makes connections easy, and the universal mounting plate assures a clean, tight fit.



Blink quick connect

STEP 1



Simply screw the Blink universal
mounting plate to the junction box.

STEP 2



Make your connections using the quick
connect included, and lift into place.

STEP 3



Snap Blink onto the mounting plate.