




ASSEMBLY INSTRUCTIONS

ITEM NO.: 1-2101-5-70

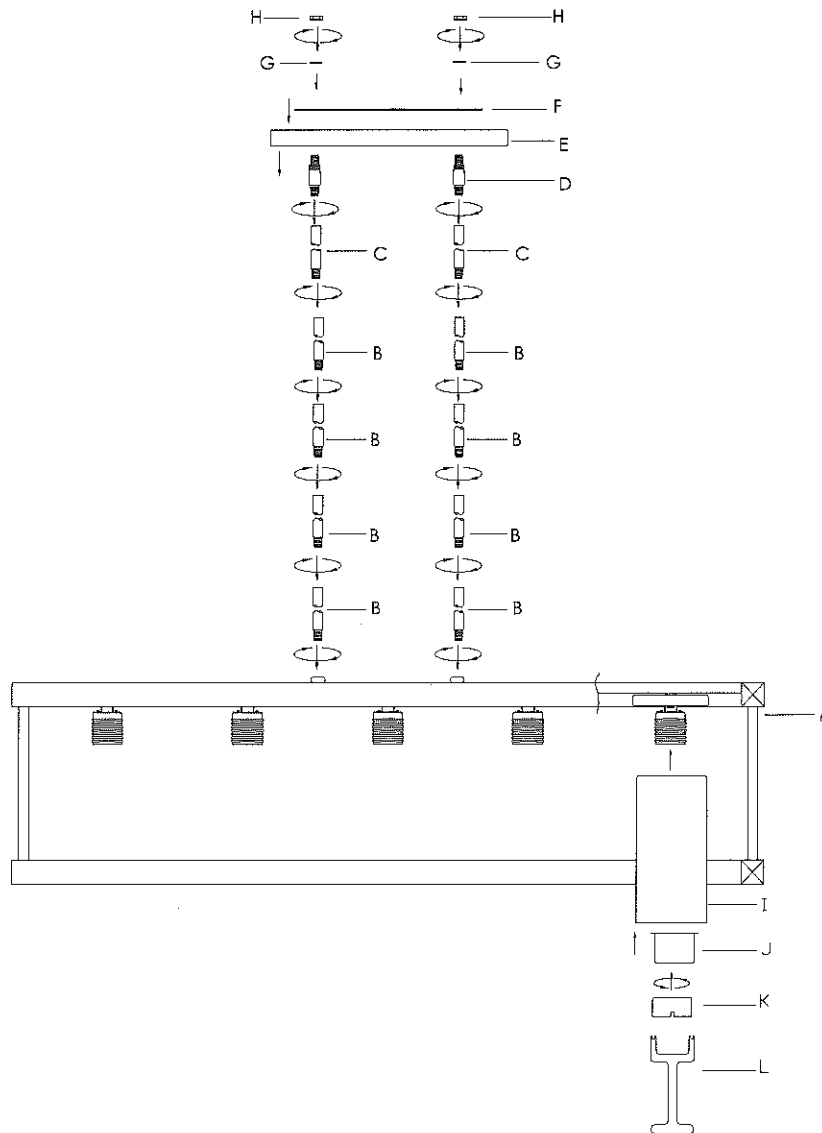

B → A → C → D → E → F → G → H → I → J → K → L

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point **OFF**.
3. Thread the bottom of center tube (B) to the fixture body (A). Repeat process for remaining center tube (B) and (C). Hands tighter until snug.
4. Install the swivel (D) onto the top of center tube (C).
5. Place the canopy (E), flat steel (F) and lock washer (G) over the swivel (D), secure with the hex nut (H).
6. Place the shade (I), space (J) over the socket, secure with the socket ring (K) by using the socket collar tool (L).
7. Referring to the installation instruction with the product for the wiring and installation.
8. Install proper bulbs (not provided) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
9. Retain power to the installation point ON and retain this sheet for future reference.




INSTALLATION INSTRUCTION For Safety Cable Installation

In INSTRUCTION:

This fixture is provided with a Safety Cable. The Safety Cable provides a back up system for the fixture's frame and the installation hardware. It is essential that the Safety Cable be properly installed. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box. The Cable must be terminated with **SLEEVE** specifically sized for the Cable per the following steps:


1. Insert enough cable through one side of the sleeve to form a large loop,
2. Wrap the Cable around the Structural Member or Top Chain Link;
3. turn back the cut end and inserting into opposite side of sleeve. Use two sleeves if desired.
4. Pull back on cable until desired loop size is obtained. It is recommended to use thimble in loop.
5. Allow 1/8" of cable cut end to extend beyond end of sleeve. Make sure this does not slip back into sleeve while swaging.

Please refer to the below Fig.1 & Fig.2 for the detail information!

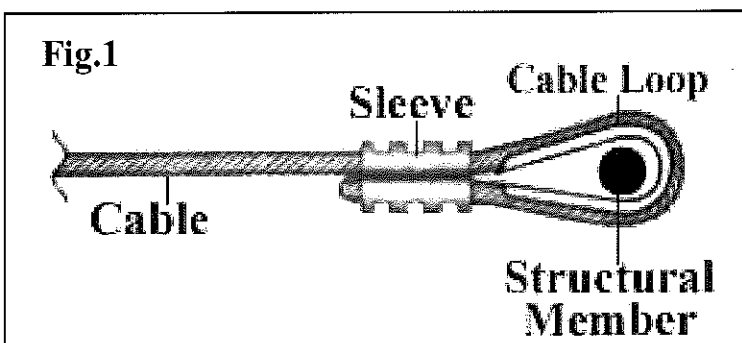

Safety Cable must be mounted on the chandelier **TOP CHAIN LINKS**.

This is a sketch for only Safety Cable mounting, to **CHAIN**. The Cable must be secured to a **STRUCTURAL MEMBER** of the building, and not to the outlet box.

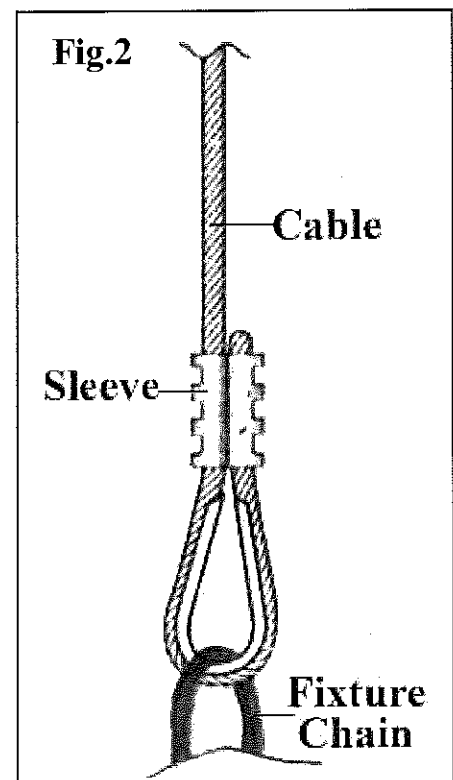

****Remark: Pls make sure all hardware is properly tightened and that the cable is positioned clear of any obstructions!****