


## ASSEMBLY INSTRUCTIONS ITEM NO.: 1-4871-9-159

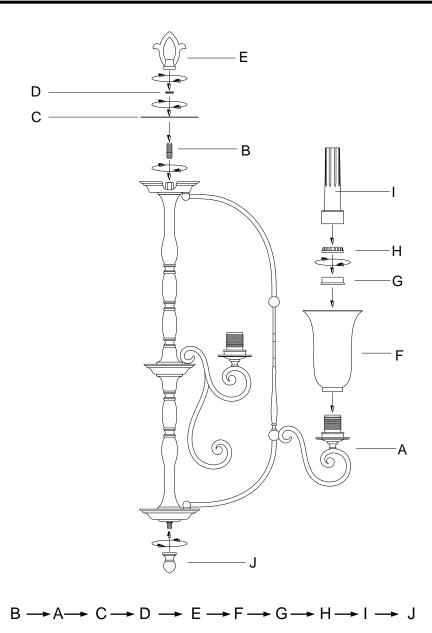

- 1. Carefully unpack and identify all parts referring to the illustration for parts identification.
- 2. Turn power to the installation point **OFF**.
- 3. Rotate arms of the fixture body (A) until they are equally spaced 60 or 120 degrees apart.
- 4. Thread nipple (B) into the coupling at the top of fixture body (A), then pass the center holes of the flat washer (C) over nipple (B), and secure with knurled nut (D) and fixture loop (E).
- 5. Carefully pass the center hole of glass (F) and check ring (G) over the socket of fixture body (A) and secure with socket ring (H) by using the socket ring tool (I).
- 6. Thread the finial (J) to the bottom of the fixture body (A).
- 7. Install proper bulbs (not provided) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
- 8. Referring to the installation instruction with the product for the wiring and installation.
- 9. Restore power to the installation point **ON**. Retain this sheet for future reference.