




# ASSEMBLY INSTRUCTIONS

## ITEM NO.: 1-4872-4-159

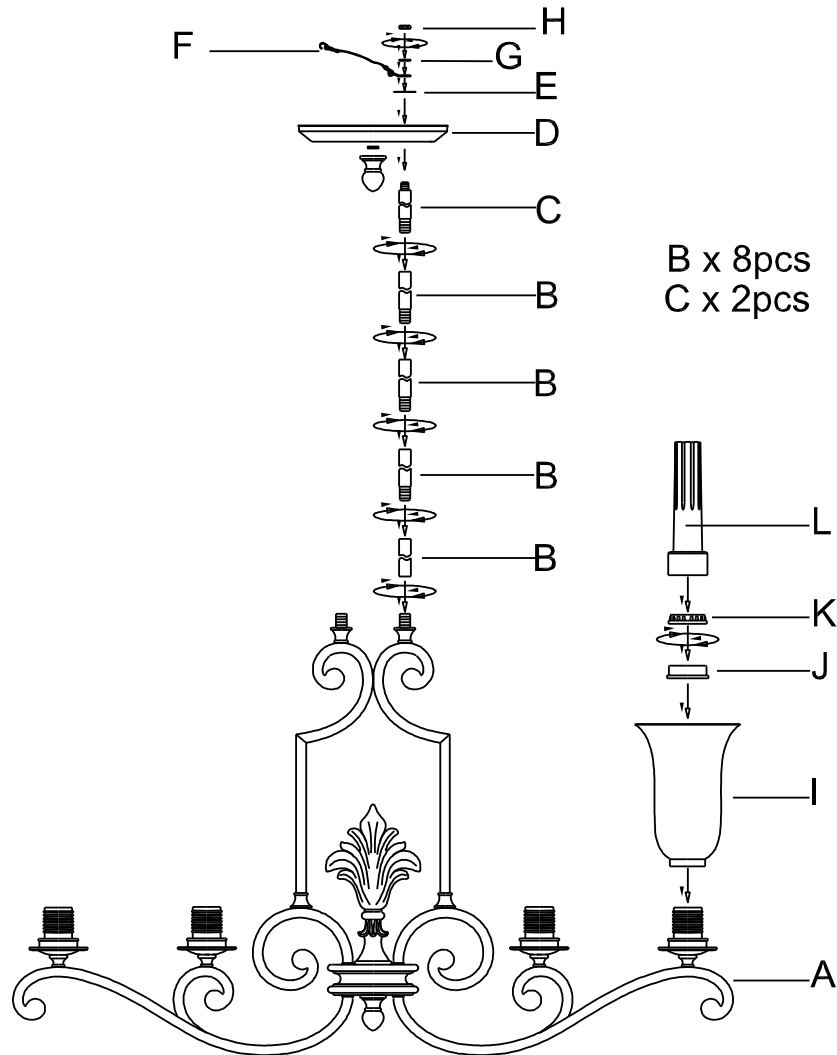

B → A → C → D → E → F → G → H → I → J → K → L

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Thread the round tube (B) into the nipple inside of the fixture body (A), round tube (C) into the protruding nipple at top of the round tube (B) until tighten.
3. Place the canopy (D), the steel washer (E), lanyard assembly (F) and lock washer (G) over the round tube (C), secure with the hex nut (H).
4. Set the glass (I), check ring (J) over the socket, secure with the socket ring (K) by using the socket ring tool (L).
5. Install proper bulbs (not provided) to each socket referring to the markings and / or labels on the fixture for maximum wattage.
6. Referring to the installation instruction with the product for the wiring and installation.
7. Restore power to the installation point **ON**. Retain this sheet for future reference.