




ASSEMBLY INSTRUCTIONS

ITEM NO.:1-7180-6-241

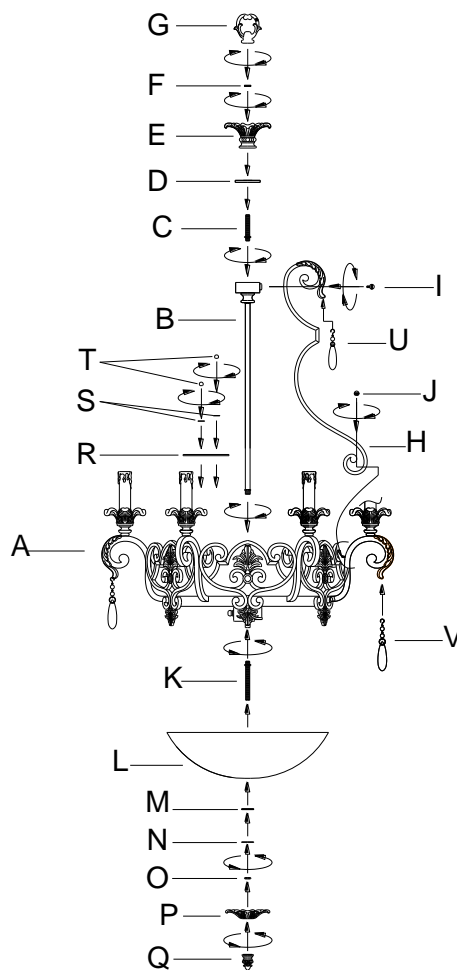

B → A → C → D → E → F → G → H → I → J → K → L →
M → N → O → P → Q → R → S → T → U → V

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Turn power to the installation point **OFF**.
3. Thread long stem (B) into the coupling at center of fixture body (A).
4. Thread stem (C) into the top of long stem (B).
5. Place cap (D) and cover (E) over the stem (C) and secure with knurled nut (F) and fixture loop (G).
6. Align the holes of arm (H) with small nipple at arm of fixture body (A) and hole of box of long stem (B), and secure with ball stud (I) and ball nut (J).
7. Screw stem (K) into the bottom of fixture body (A).
8. Install proper bulbs (not provided) to sockets referring to the markings and/or labels on the fixture for maximum wattage.
9. Raise glass (L), rubber washer (M) and steel washer (N) up over the stem (K) and secure with hex nut (O).
10. Place font (P) over the stem (K) and secure with finial (Q).
11. Align the holes of the glass (R), rubber washer (S) with highlighted small nipple of fixture body (A), and secure with small ball nut (T).
12. Attach crystal (U) to the holes of arm(H) then crystal (V) to the hole of fixture body (A)
13. Restore power to the installation point **ON**. Retain this sheet for future reference.