




ASSEMBLY INSTRUCTIONS

ITEM NO.: 6-4091-21-16

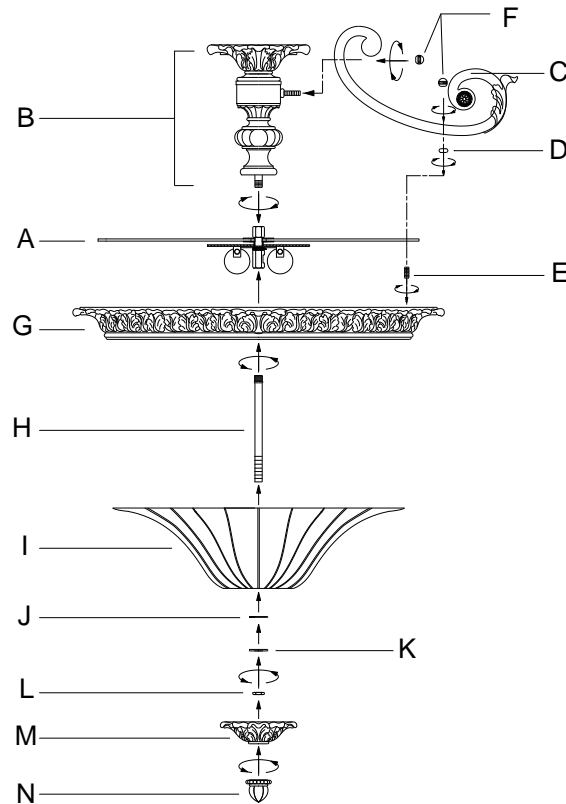

E → G → A → D → B → C → F → H → I → J → K → L → M → N

1. Screw the stud (E) into the coupling in the poly pan (G).
2. Align the hole of strap of fixture body (A) and secure with the bead nut (D).
3. Thread the bottom end of center column (B) to the coupling at top of fixture body (A).
4. Attach the decorative arm (C) to the stud (E) and the center column (B) and secure with the ball nut (F) as shown in the illustration.
5. Screw the top of thread pipe (H) to the coupling at underside of fixture body (A).
6. Install proper bulbs (not provided) to each socket referring to the markings and/or labels on the fixture for maximum wattage.
7. Carefully pass the glass (I), rubber washer (J), steel washer (K) over the threaded pipe (H) and secure with hex nut (L).
8. Pass the cap (M) through the threaded pipe (H) and secure with finial (N).
9. Remain this sheet for future reference.