




ASSEMBLY INSTRUCTIONS

ITEM NO.: 7-3006-3-8

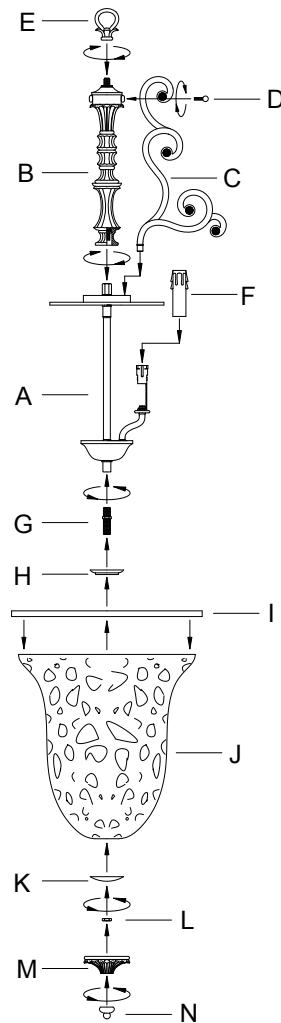

B→A→C→D→E→F→G→H→I→J→K→L→M→N

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Unravel the power supply and ground wires and pass them through the center holes of column (B) and fixture loop (E). Thread the bottom of column (B) into the coupling at top of fixture body (A), and then thread the fixture loop (E) onto the protruding nipple from the top of column (B). Hand tightens until snug.
3. Carefully locate the scroll (C), insert the bottom of scroll (C) into the hole in the steel washer at the top of fixture body (A) as shown, and align the hole in the top of scroll (C) with the mounting hole and secure with the ball stud (D).
4. Carefully install the candle sleeve (F) onto the socket.
5. Install proper bulbs (not provided) to the sockets referring to the markings and/or labels for maximum wattage.
6. Thread nipple (G) into the coupling at the bottom of fixture body (A). Hand tightens until snug.
7. Place the steel ring (I) onto the edge of glass (J).
8. Carefully pass the center holes of check ring (H), glass (J) and cap (K) through the protruding nipple (G) at the bottom of fixture body (A), and secure with hex nut (L).
9. Pass the center hole of font (M) through the protruding nipple from glass (J) and secure with finial (N). Hand tightens until snug.
10. Restore power to the installation point **ON**. Retain this sheet for future reference.