




ASSEMBLY INSTRUCTIONS

ITEM NO.:7-3413-3-56

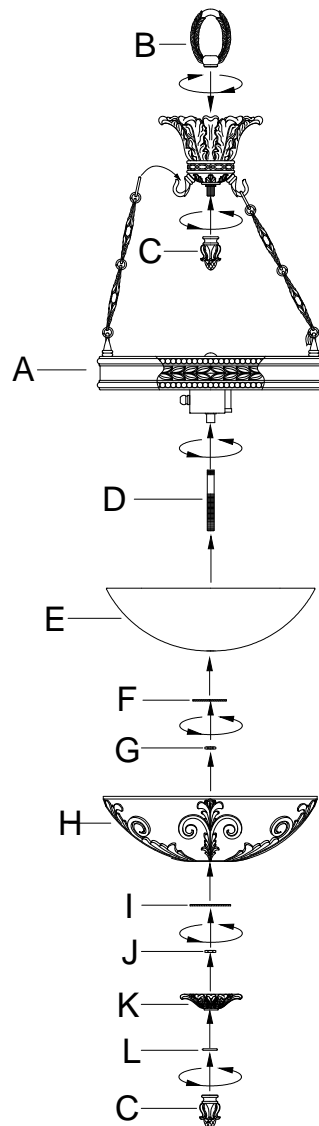

B → C → A → D → E → F → G → H → I → J → K → L

1. Carefully unpack and identify all parts referring to the illustration for parts identification.
2. Turn power to the installation point **OFF**.
3. Unravel the supply and ground wires and pass the center holes of fixture loop (B).
4. Thread fixture loop (B) into the nipple inside big cover of fixture body (A) as shown in the diagram, then finial (C) into the nipple at bottom of fixture body (A).
5. Attach the end of chain of fixture body (A) to the hook of big cover as shown in the diagram.
6. Thread stem (D) into the coupling at bottom of fixture body (A).
7. Install proper bulbs (not provided) to sockets referring to the markings and/or labels on the fixture for maximum wattage.
8. Raise glass (E) and big steel washer (F) over the stem (D), and secure with hex nut (G).
9. Slip steel bowl (H) and steel strap (I) over the stem (D), and secure with hex nut (J).
10. Place font (K) and cap (L) over the stem (D), and secure with finial (C).
11. Restore power to the installation point **ON**. Retain this sheet for future reference.