


## Instructions for electrician STEP 2 - 5




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

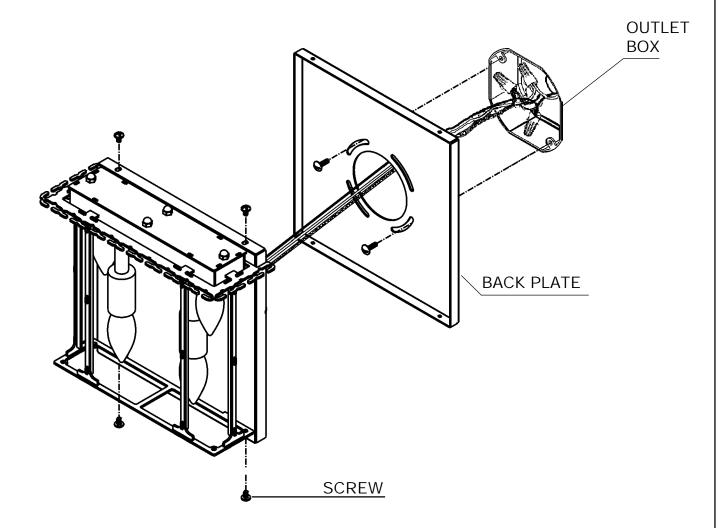

- 3 Remove the (4) wall sconce screws and separate the back plate from the wall sconce. Attach back plate to the outlet box with (2) screws.
- 4 Feed stem and ground wires through back plate, then attach to power wires and ground wire in outlet box.
- 5 Attach wall sconce to back plate and tighten the four screws removed previously.



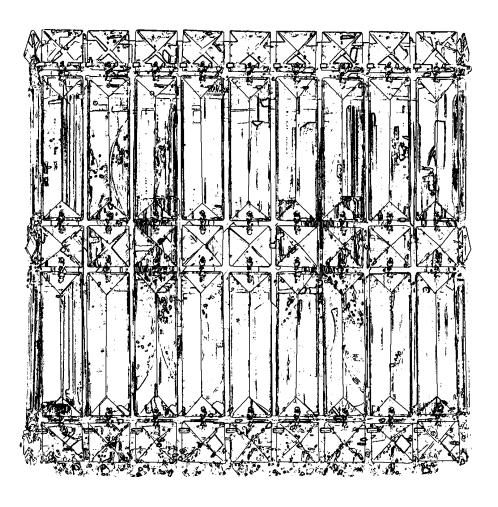

|T|<sub>HIS</sub> DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF SCHONBEK WORLDWIDE LIGHTING INC.


4 Lights Length: 9 " Extension: 3-1/2" Height: 9" Weight: 6 lbs.

## **SCHONBEK**®

See diagram on back page Follow steps in exact order Save this trim diagram for future reference

	IMPORTANT Person who opens carton should record the
	following information for future service.
	CODE # Four-digit number on outside of carton.
	PACKER # See crystal package label.
lacktriangle	ORDER # See crystal package label.


## Instructions for crystal trimming STEPS 6 - 8



You will need 4 - B8 40 Watts Max

25 Watts recommended (Supplied - Schonbek #: 30025)

Install bulbs and be sure to test fixture BEFORE trimming.

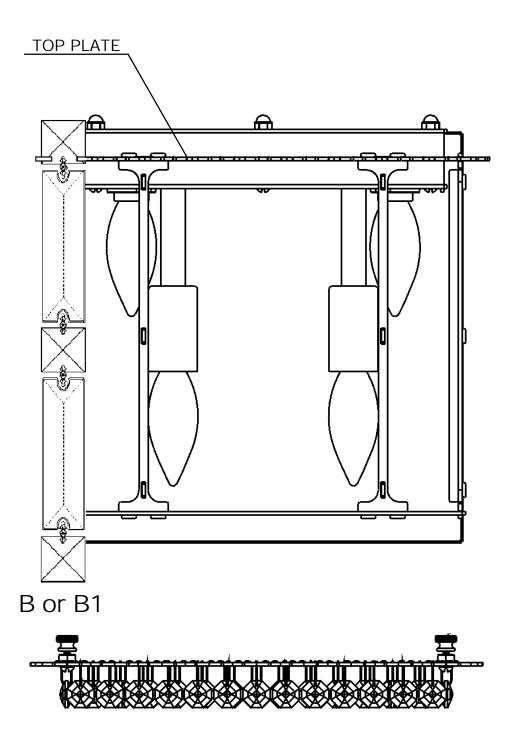

7 Install bottom crystal grid with four thumb nuts (already screwed onto grid) to bottom of the wall sconce.

8 Hold chain "B" by the top square crystal. (NOTE: Flat side of large crystals face out and chains are also symmetrical so either end will work!) When trimming a ST fixture, starting with chain "B" on either side against the wall, alternate hanging B & B1 chains. Insert bottom square crystal into the pocket of bottom crystal grid. Then position the top connector (between the top two crystals) into the top plate pocket opening directly above the bottom crystal grid pocket. (Diagram #1) Lower the chain until the top square stone seats itself into the top plate pocket. When the chain is installed correctly, it will be held in place by both top and bottom pockets.

