
Instructions for electrician STEP 2


WARNING: THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY

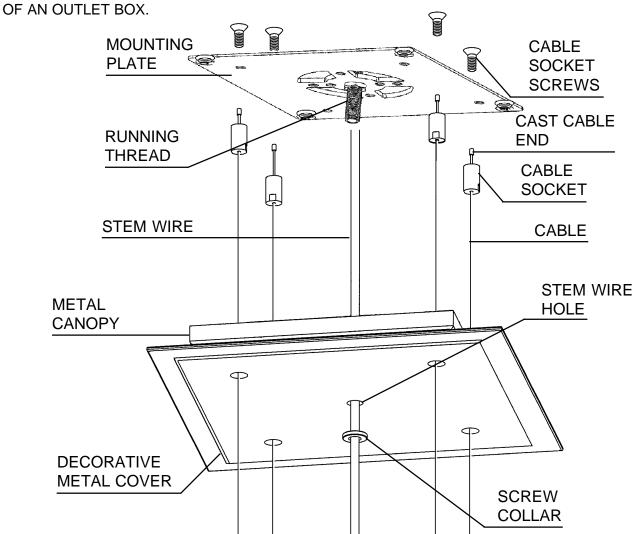

2 Remove the screw collar, decorative metal cover and metal canopy from the canopy assembly. Remove cable socket screws from top of mounting plate so that you can feed suspension cables through the cable sockets from the top. The cast cable ends are seated in the inside of the cable socket. Assemble cable sockets with cables installed onto the bottom of the mounting plate with the cable socket screws securely. Attach mounting plate to supporting member in the ceiling sufficient enough to support the weight of the fixture with cables hanging down. Feed suspension cables through the four holes on the metal canopy and decorative metal cover. The metal canopy must be on top of the decorative metal cover. Feed cable into cable glider on chandelier frame and hang at desired height. Slide cables into gliders and allow them to play out of the side of the cable gliders. To adjust height, depress the cable grippers until the cable is released to move the frame up and down the cable. Feed stem wire through screw collar, stem wire hole in decorative metal cover and metal canopy. When chandelier is at desired height, trim stem wire and connect ground wire (marked with green tracer) and power wires (black or white tracers) in outlet box. Raise metal canopy and decorative metal cover to ceiling and secure to running thread with the screw collar. Cut suspension cables with cable cutters leaving about 1/2" protruding from the side of the cable gliders.

QUANTUM 2281A TRIM DIAGRAM

HIS DESIGNIS THE PROPRIETARY
TRADEDRESS/TRADEMARK OF
SCHONBEK WORLDWIDE LIGHTING INC.

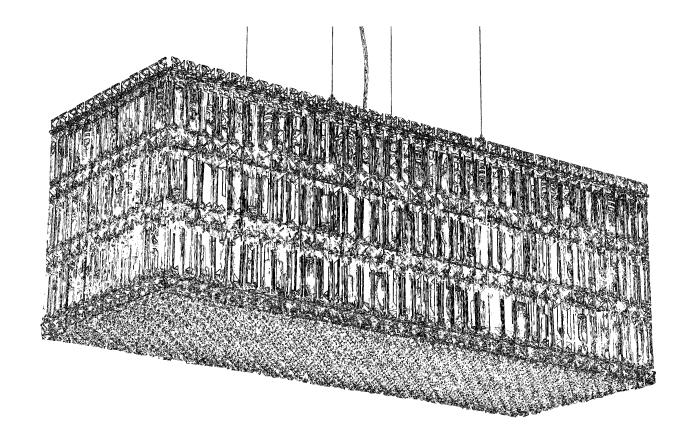

33 Lights


Length: 36-1/2"

Width: 13" Height: 13"

Hanging Weight: 62 lbs.


SCHONBEK®

See diagram on back page Follow steps in exact order Save this trim diagram for future reference

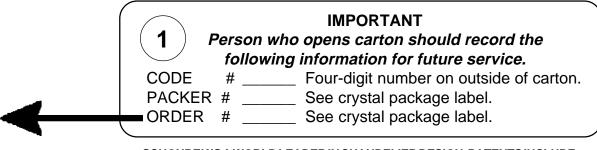

SCHONBEKIS A WORLD LEADER IN CHANDELIER DESIGN. PATENTS INCLUDE: $\#5,144,541,\ \#5,222,805\ \&\ \#5,460,269$

Instructions for crystal trimming STEPS 3 - 5



You will need 33 - B8
25 Watts Max
25 Watts recommended
(Supplied - Schonbek #: 30025)

Install bulbs and be sure to test fixture BEFORE trimming.

4 Install three bottom crystal grids with four thumb nuts each (already screwed onto grid) to bottom of the chandelier.

5 Hold chain "C" by the top square crystal. (NOTE: Flat side of large crystals face out and chains are also symmetrical so either end will work!) Insert bottom square crystal into the pocket of bottom crystal grid. Then position the top connector (between the top two crystals) into the top plate pocket opening directly above the bottom crystal grid pocket. (Diagram #1) Lower the chain until the top square stone seats itself into the top plate pocket. When the chain is installed correctly, it will be held in place by both top and bottom pockets.

