


Important: Label on back contains important information on your crystal option. Please save in case you ever need to order matching crystal.


Trim Diagram  
Refrax™ Pendant RE0209-\*\*

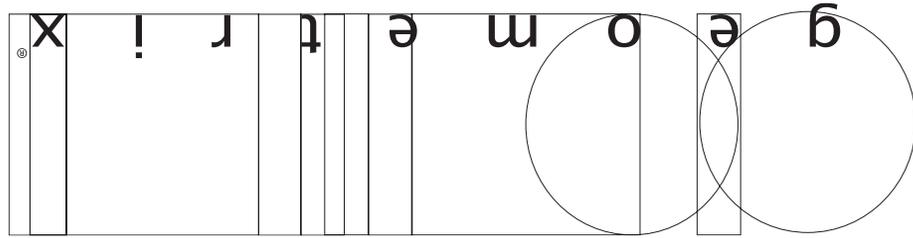


Schonbek Worldwide Lighting Inc., 61 Industrial Blvd., Plattsburgh NY 12901-1908  
Tel: 800.836.1892 or 518.563.7500 www.schonbek.com

© 2006 SCHONBEK WORLDWIDE LIGHTING INC., A. SCHONBEK & CO. LTD. WORLDWIDE COPYRIGHT RESERVED

US PATENT: #5,109,325

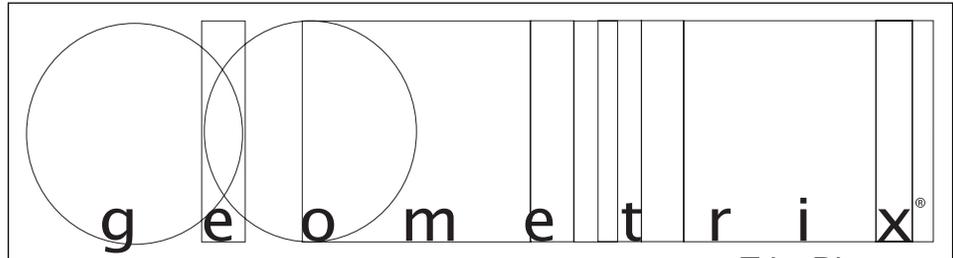

Trim Diagram  
Refrax™ Pendant RE0209-\*\*

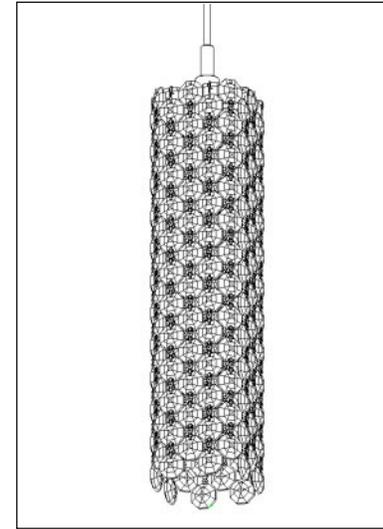

1 Light  
Length: 2", Width: 2", Height: 9"

Geometrix™ is designed by Schonbek with Strass® crystal by Swarovski.








This design is the proprietary trade dress/trademark of Schonbek Worldwide Lighting Inc

Please save your trim diagram for future reference.

IMPORTANT: Label on back contains important information on your crystal option. Please save in case you ever need to order matching crystal.



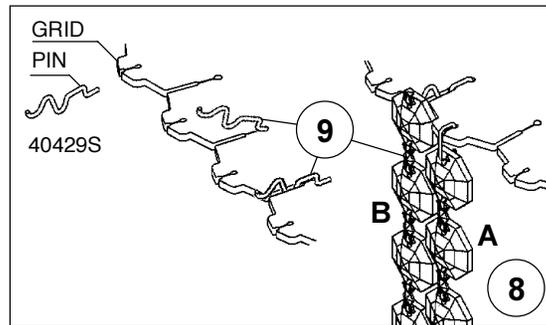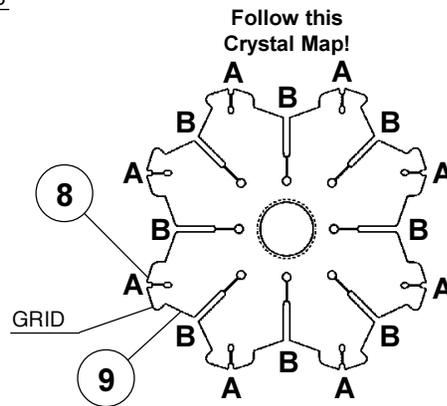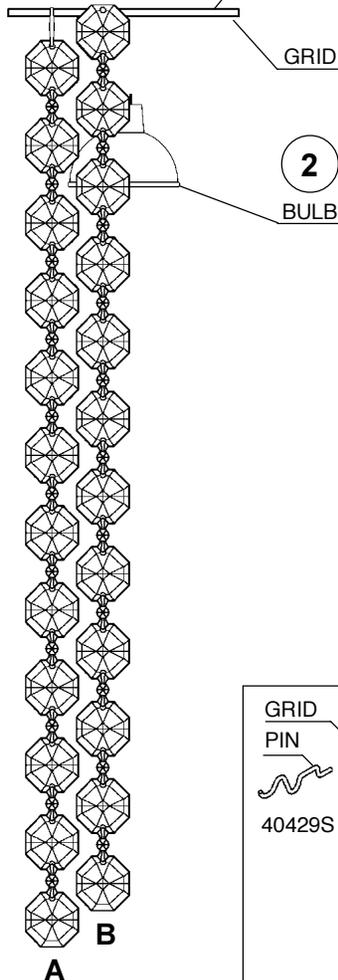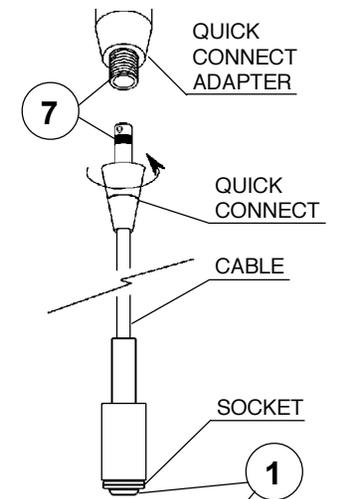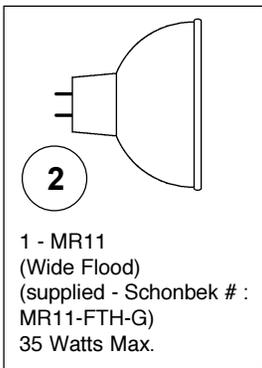


## How to Install Mr11 Bulb and Refrax™ Pendant

Pendants may be mounted to monorail systems, monopoints or line voltage track by coupling to the quick connect transformer adapter. Attached to the socket is a cable that may be cut on site during installation to any length (see instructions below).


**1** Position the pendant grid against the socket and secure in place by screwing the metal collar onto the socket.

**2** Plug bulb carefully but completely into socket. Use only an MR11 glass covered lamp bulb.


## How to Shorten the Cable:

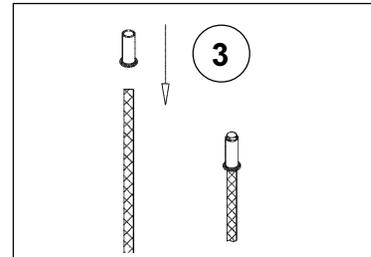


**3** Cut the cable cleanly with wire cutter to desired length, and slide brass collar over wire. Position collar so that a small section (1/16") of braided wire protrudes from the top of the collar.

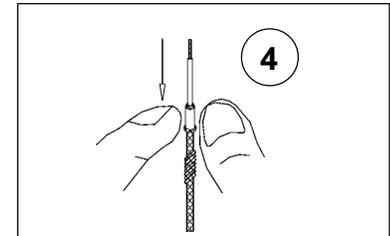

**5** Grasping the collar, slide braided outer wire back to expose inner wire. Trim 1/8" of insulation from the inner wire with wire stripper.

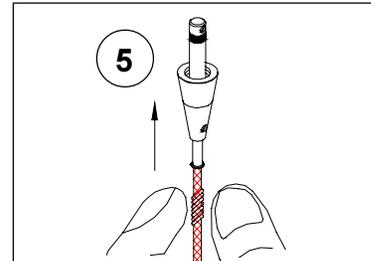

**5** Feed inner wire into quick connect adapter until it reaches top set screw. Feed braided outer wire and brass collar into quick connect.

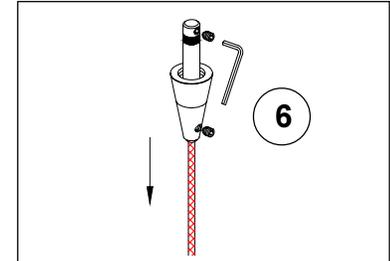

**6** Tighten top set screw first, then lower set screw snugly. Smooth out any bulges in braided wire.

**7** Screw quick connect into quick connect adapter until it seats. If you adjust the orientation of the pendant, be careful not to loosen the connection.

**8** Hang A chains first, following the crystal map. Hook the connectors into the pinholes located towards the outside of the grid. See illustration to the left.

**9** Insert pins into grid. Hang B chains by sliding the octagon with an open hole onto the pin. Chains B will nest into position between A chains. See illustration to the left.