


ADDITIONS

TWO

2016

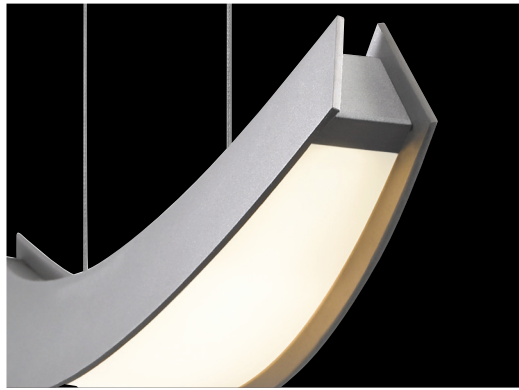


SONNEMAN<sup>®</sup>  
A WAY OF LIGHT

ADDITIONS	
TWO	2016

# ADDITIONS

## TWO 2016

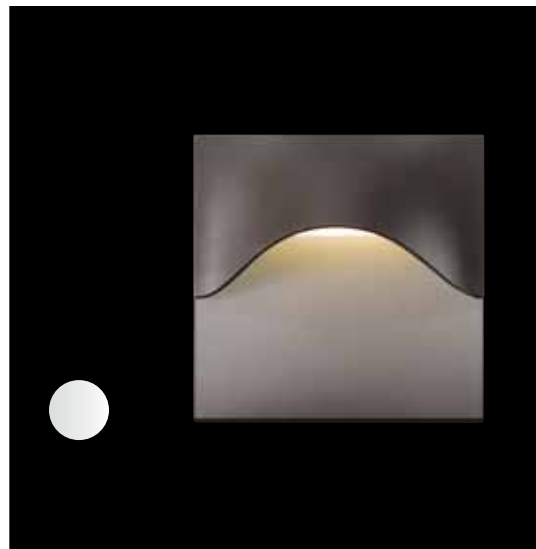

### ARCHITECTURAL DECORATIVE

We continue to pursue our mission of creating superb illumination with simplicity and functional clarity. The new language of technologically enabled design allows us to refine the relationship of simple elements as sculptural forms.

### MODERN-CONTEMPORARY

Comfortable contemporary lighting envisioned with elegant simplicity and a decorative link to the Mid-Century Modernism that defined the 20th century era.

### INSIDE-OUT™

Beautifully executed forms of sculptural presence and simplicity that are equally at home inside or out. We have expanded the scope and utility of new and existing products, defining a new category for indoor and outdoor use: INSIDE-OUT™.

### SUSPENDERS™

Suspenders LED system is a delicately scaled, modular system of interconnected elements and suspended LED components. It can be configured as individual lighting sculptures or as a web of infinite scope and variety. Robert Sonneman has reimagined and broadly expanded his 1980s Suspenders concept with today's leading-edge technology. (SEE SUSPENDERS™ 2016 BOOK, UNDER SEPARATE COVER.)

### ROBERT SONNEMAN

Design is a continuum, a continuity of newness often evolutionary, occasionally revolutionary. Most importantly, good design represents a consistency of perspective and a commitment to the promise of a brand. I continue a lifelong commitment to push the boundaries of Modern design in pursuit of achieving the very best of what's next.

# ADDITIONS

TWO 2016


spire	06	radiance	61
rain	10	light frames	62
trinity	14	crest	64
gestures	20	cusp	65
quad-Y	22	ridgeline	66
bi-Y	24	prism	68
Y	25	chamfer	69
stix	26	angled plane	70
tao	30	ply	72
dao	31	cape	73
chroma	32	tab	73
profili	34	tides	74
kabu	36	folds	76
haro	38	shear	78
panels	40	elips	79
bauhaus revisited	46	drift	79
dazzle	52	CRCL	80
l'arc	56	SQR	81
midtown	58	aku	82
sword	59	nami	83
sideways	60		



## spire

Downward LED illumination shimmers through a radially-cut crystal cone, suspended from its precisely tapered form in polished chrome. Placed as single pendant drops or used in multiple arrays, the Spire-like compositions present a fresh approach to modern elegance.



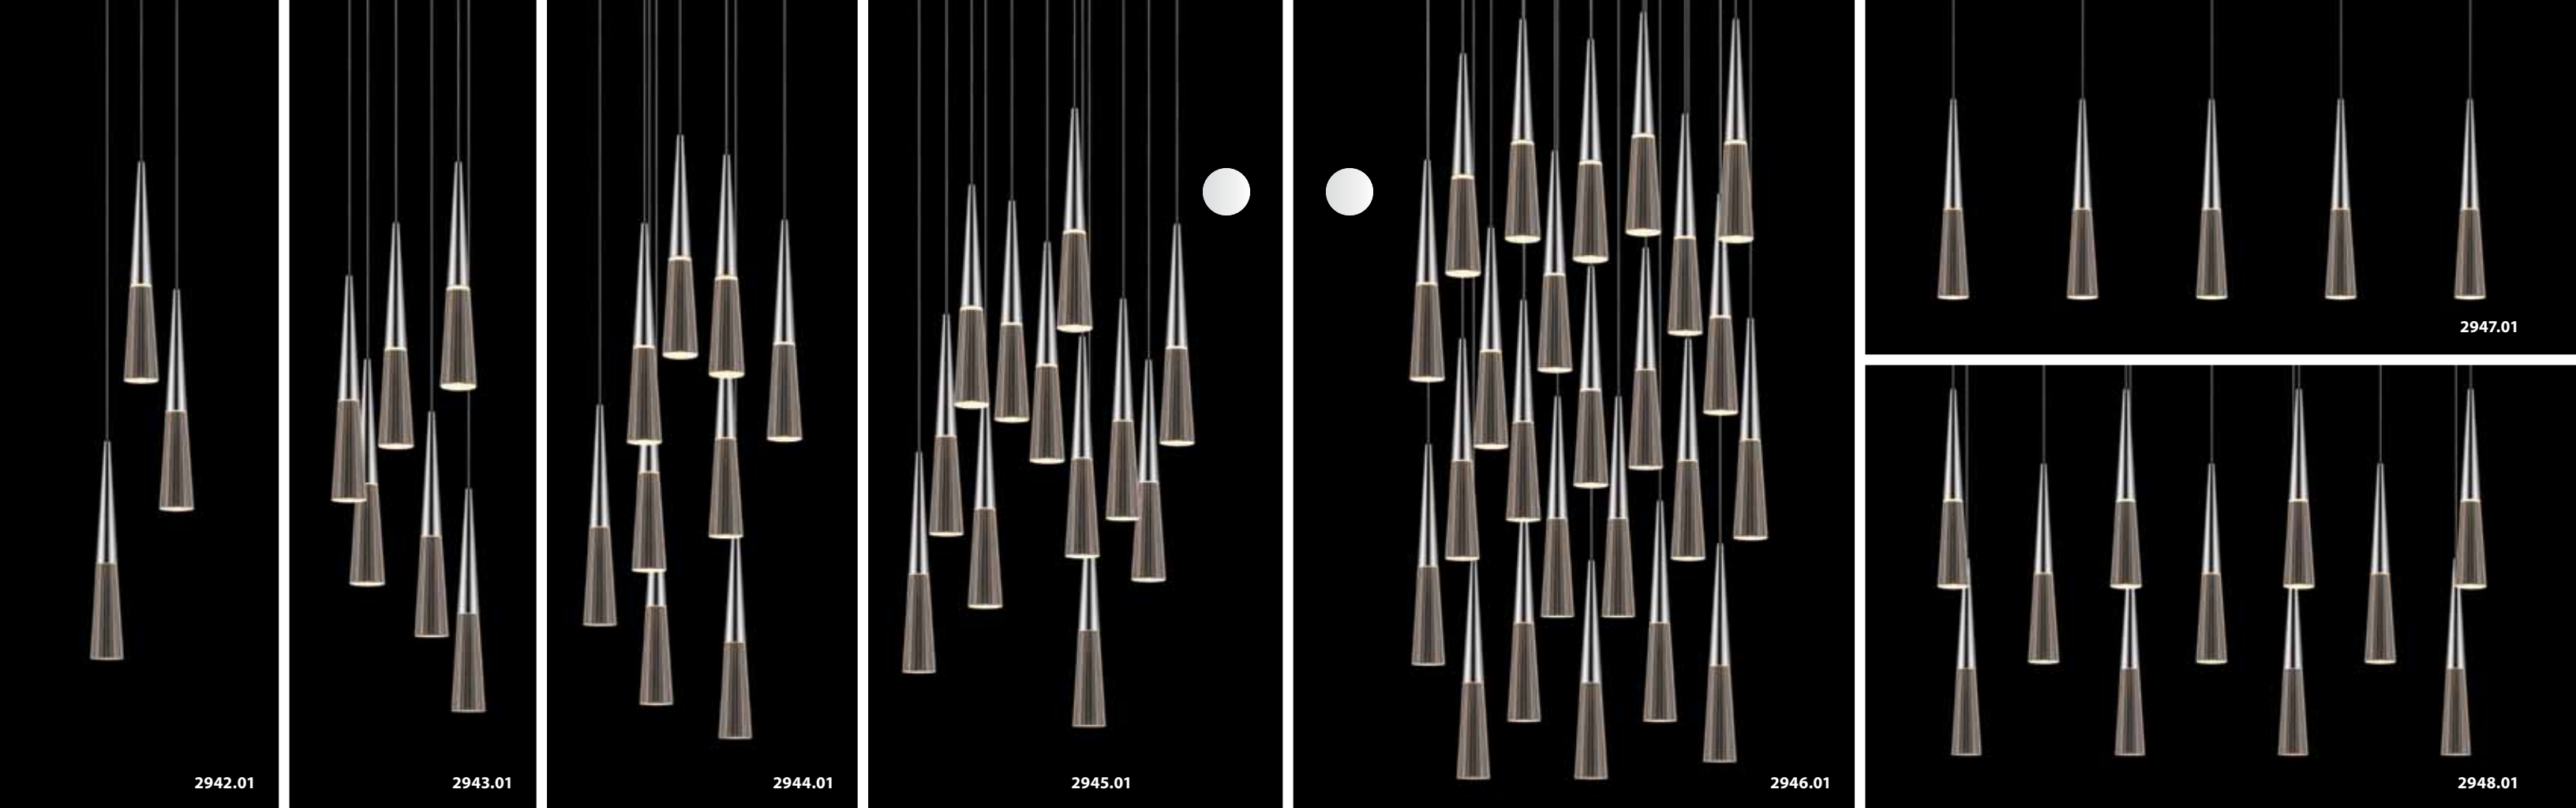

## spire pendant configurations

### 2940

#### Spire LED Pendant w/Micro-Dome Canopy

12 3/4" H x 2" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 1" H x 2" DIA w/10' Adjustable Cord  
LED (1): 4w, 300 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

**2940.01** Polished Chrome

### 2943

#### Spire 6-Light Round LED Pendant

12 3/4" H x 10" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 10" DIA w/10' Adjustable Cord  
LED (6): 23w (total), 1800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2943.01** Polished Chrome

### 2941

#### Spire LED Pendant w/Round Canopy

12 3/4" H x 2" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 5" DIA w/10' Adjustable Cord  
LED (1): 4w, 300 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2941.01** Polished Chrome

### 2944

#### Spire 9-Light Round LED Pendant

12 3/4" H x 12" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 12" DIA w/10' Adjustable Cord  
LED (9): 35w (total), 2700 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2944.01** Polished Chrome

### 2942

#### Spire 3-Light Round LED Pendant

12 3/4" H x 6 1/2" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 6" DIA w/10' Adjustable Cord  
LED (3): 12w (total), 900 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2942.01** Polished Chrome

### 2945

#### Spire 12-Light Round LED Pendant

12 3/4" H x 15" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 15" DIA w/10' Adjustable Cord  
LED (12): 47w (total), 3600 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2945.01** Polished Chrome

### 2946

#### Spire 24-Light Round LED Pendant

12 3/4" H x 25 1/4" DIA  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 25" DIA w/10' Adjustable Cord  
LED (24): 93w (total), 7200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2946.01** Polished Chrome

### 2948

#### Spire 11-Light Rectangle LED Pendant

12 3/4" H x 36" w x 8" D  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 35 3/4" x 8" w/10' Adjustable Cord  
LED (11): 43w (total), 3300 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2948.01** Polished Chrome

### 2947

#### Spire 5-Light Rectangle LED Pendant

12 3/4" H x 36" w x 5" D  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 36" x 5" w/10' Adjustable Cord  
LED (5): 19w (total), 1500 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2947.01** Polished Chrome




### 2949

#### Spire 16-Light Square LED Pendant

12 3/4" H x 22" sq  
Shade: Cut Crystal  
5 1/2" H x 2" DIA  
Canopy: 24" sq w/10' Adjustable Cord  
LED (16): 62w (total), 4800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2949.01** Polished Chrome






## rain

Fluid forms of polished chrome and crystal descend like Rain, infused with an internally laser-etched composition of intertwined helix patterns that radiate LED illumination while transmitting focused points of light downward.





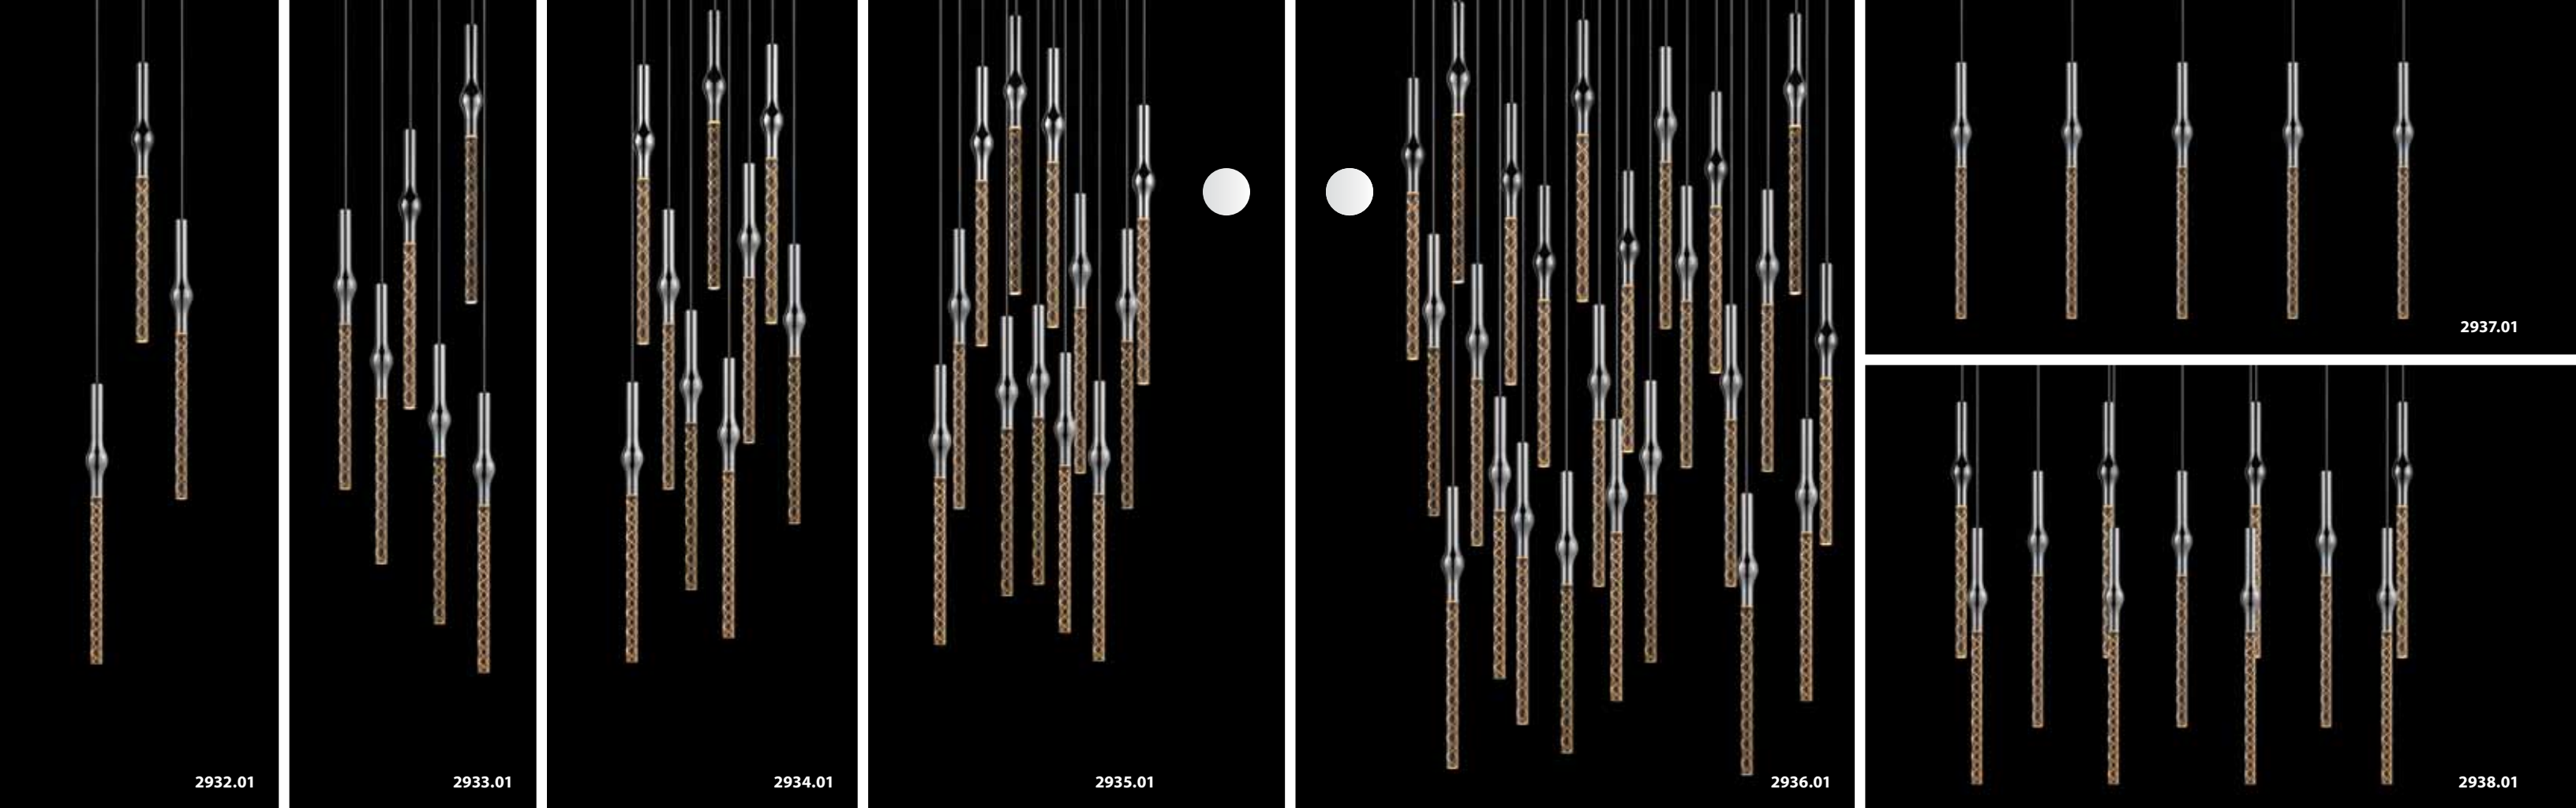

2932.01

2933.01

2934.01

2935.01

2936.01

2937.01

2938.01

2939.01

## rain pendant configurations

### 2930

#### Rain LED Pendant w/Micro-Dome Canopy

14 3/4" H x 1 1/4" W  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 1" H x 2" DIA w/10' Adjustable Cord  
LED (1): 4w, 270 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

**2930.01** Polished Chrome

### 2933

#### Rain 6-Light Round LED Pendant

14 3/4" H x 9 1/4" DIA  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 10" DIA w/10' Adjustable Cord  
LED (6): 21w (total), 1600 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2933.01** Polished Chrome

### 2931

#### Rain LED Pendant w/Round Canopy

14 3/4" H x 1 1/4" W  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 5" DIA w/10' Adjustable Cord  
LED (1): 4w, 270 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)

**2931.01** Polished Chrome

### 2934

#### Rain 9-Light Round LED Pendant

14 3/4" H x 11 1/4" DIA  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 12" DIA w/10' Adjustable Cord  
LED (9): 32w (total), 2400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2934.01** Polished Chrome

### 2932

#### Rain 3-Light Round LED Pendant

14 3/4" H x 5 3/4" DIA  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 6" DIA w/10' Adjustable Cord  
LED (3): 11w (total), 800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2932.01** Polished Chrome

### 2935

#### Rain 12-Light Round LED Pendant

14 3/4" H x 14 1/4" DIA  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 15" DIA w/10' Adjustable Cord  
LED (12): 42w (total), 3200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2935.01** Polished Chrome

### 2936

#### Rain 24-Light Round LED Pendant

14 3/4" H x 24 1/4" DIA  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 25" DIA w/10' Adjustable Cord  
LED (24): 85w (total), 6400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2936.01** Polished Chrome

### 2938

#### Rain 11-Light Rectangle LED Pendant

14 3/4" H x 35" W x 8" D  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 36" x 8" w/10' Adjustable Cord  
LED (11): 39w (total), 2900 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2938.01** Polished Chrome

### 2937

#### Rain 5-Light Rectangle LED Pendant

14 3/4" H x 35 1/4" W x 5" D  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 36" x 5" w/10' Adjustable Cord  
LED (5): 18w (total), 1350 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2937.01** Polished Chrome




### 2939

#### Rain 16-Light Square LED Pendant

14 3/4" H x 21 1/4" SQ  
Shade: Laser-Etched Crystal  
8 3/4" H x 3/4" DIA  
Canopy: 24" SQ w/10' Adjustable Cord  
LED (16): 56w (total), 4250 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)


**2939.01** Polished Chrome





## trinity

A crystal prism is hand-cut in patterns that echo the acute angles and faces of its crisp, triangular form. LED illumination projects through the angular bottom facet. When hung in multiple clusters, Trinity provides a dazzling pattern of varying brightness.

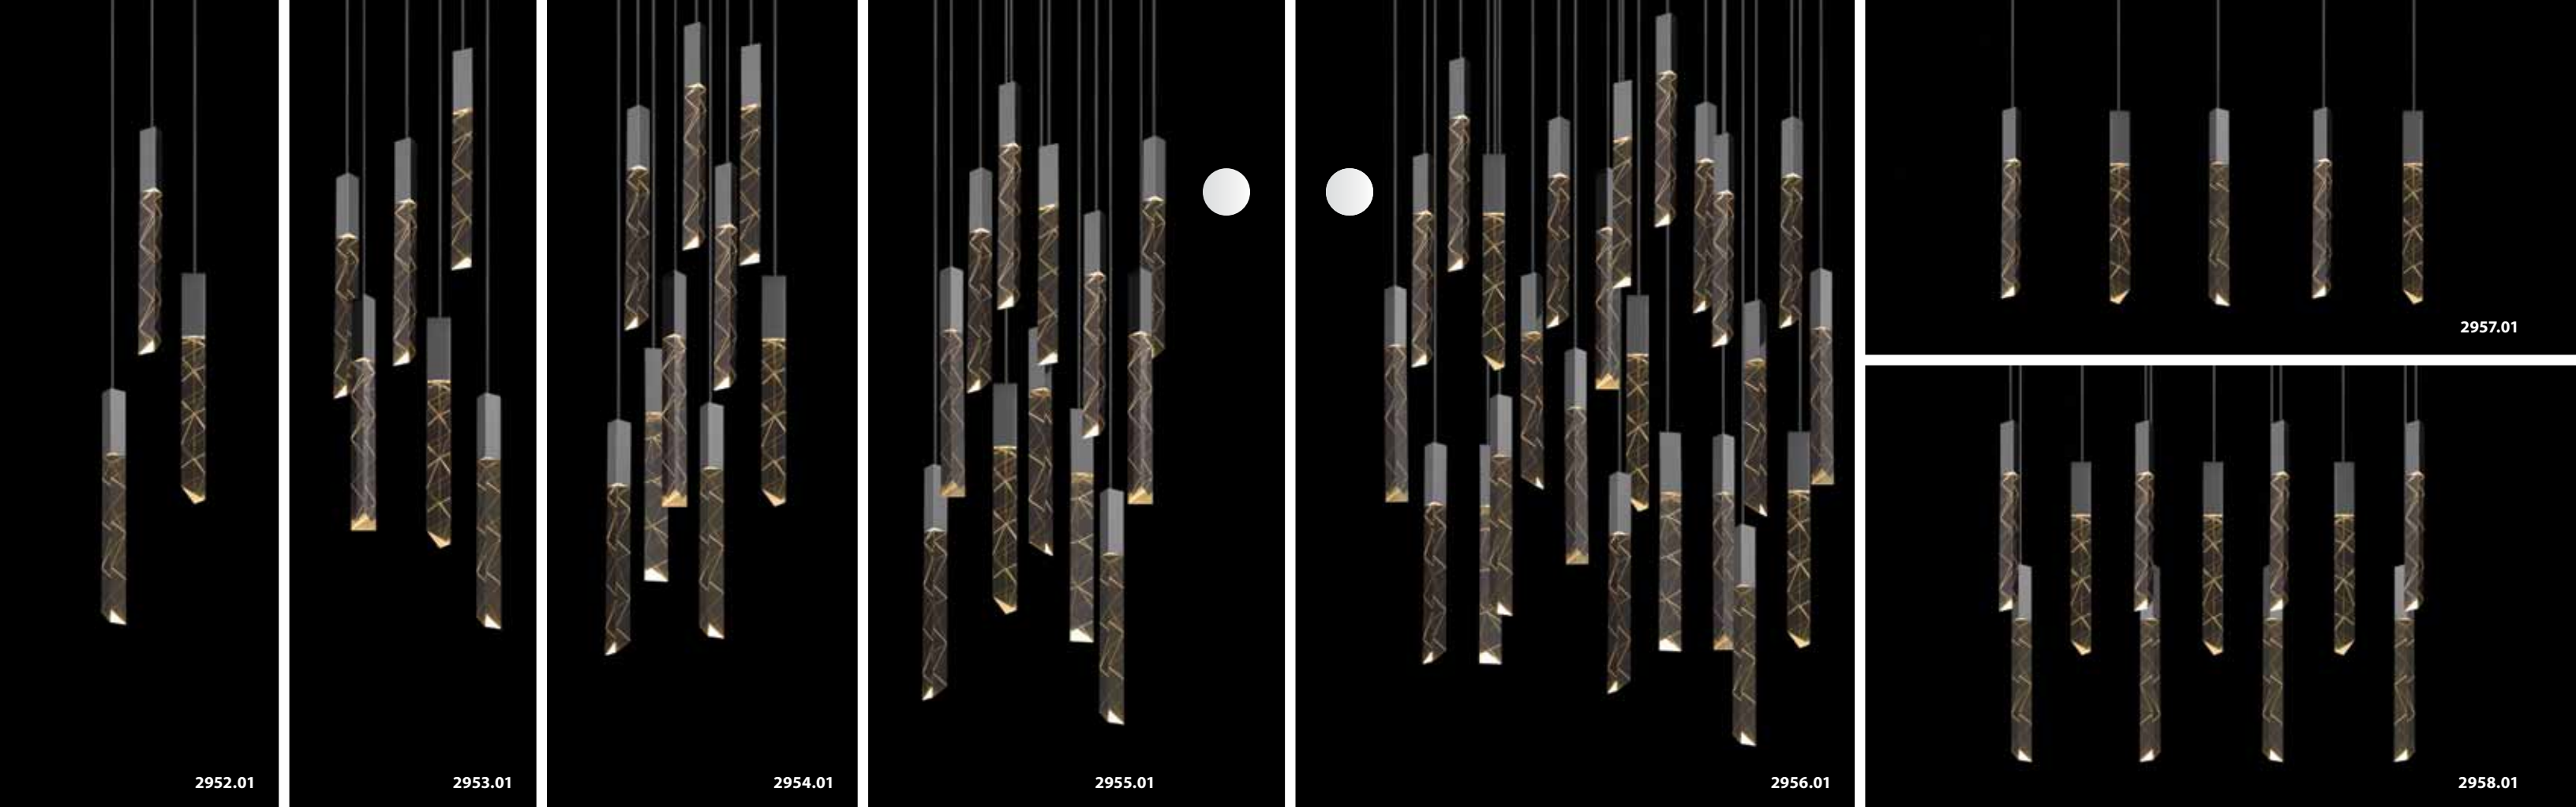

2952.01

2953.01

2954.01

2955.01

2956.01

2957.01

2958.01



2951.01

## trinity pendant configurations

### 2950

#### Trinity LED Pendant w/Micro-Dome Canopy

11 3/4" H x 1 1/4" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 1" H x 2" DIA w/10' Adjustable Cord  
LED (1): 4w, 270 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

**2950.01** Polished Chrome

### 2953

#### Trinity 6-Light Round LED Pendant

11 3/4" H x 9 1/4" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 10" DIA w/10' Adjustable Cord  
LED (6): 21w (total), 1600 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2953.01** Polished Chrome

### 2951

#### Trinity LED Pendant w/Round Canopy

11 3/4" H x 1 1/4" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 5" DIA w/10' Adjustable Cord  
LED (1): 4w, 270 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2951.01** Polished Chrome

### 2954

#### Trinity 9-Light Round LED Pendant

11 3/4" H x 11 1/4" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 12" DIA w/10' Adjustable Cord  
LED (9): 32w (total), 2400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2954.01** Polished Chrome

### 2952

#### Trinity 3-Light Round LED Pendant

11 3/4" H x 6" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 6" DIA w/10' Adjustable Cord  
LED (3): 11w (total), 800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2952.01** Polished Chrome

### 2955

#### Trinity 12-Light Round LED Pendant

11 3/4" H x 14 1/2" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 15" DIA w/10' Adjustable Cord  
LED (12): 42w (total), 3200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2955.01** Polished Chrome

### 2956

#### Trinity 24-Light Round LED Pendant

11 3/4" H x 24 1/2" DIA  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 25" DIA w/10' Adjustable Cord  
LED (24): 85w (total), 6400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2956.01** Polished Chrome

### 2958

#### Trinity 11-Light Rectangle LED Pendant

11 3/4" H x 35" w x 8" D  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 36" x 8" w/10' Adjustable Cord  
LED (11): 39w (total), 2900 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2958.01** Polished Chrome

### 2957

#### Trinity 5-Light Rectangle LED Pendant

11 3/4" H x 35 3/4" w x 5" D  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 36" x 5" w/10' Adjustable Cord  
LED (5): 18w (total), 1350 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2957.01** Polished Chrome

### 2959

#### Trinity 16-Light Square LED Pendant

11 3/4" H x 21.25" sq  
Shade: Cut Crystal  
8 3/4" H x 1 1/4" DIA  
Canopy: 24" sq w/10' Adjustable Cord  
LED (16): 56w (total), 4250 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
Dimmable by Electronic  
Low Voltage (ELV)

**2959.01** Polished Chrome



2959.01




## pendant canopies

Choose from a variety of 7 round and 3 rectangular canopy sizes for Spire, Rain, and Trinity pendants.





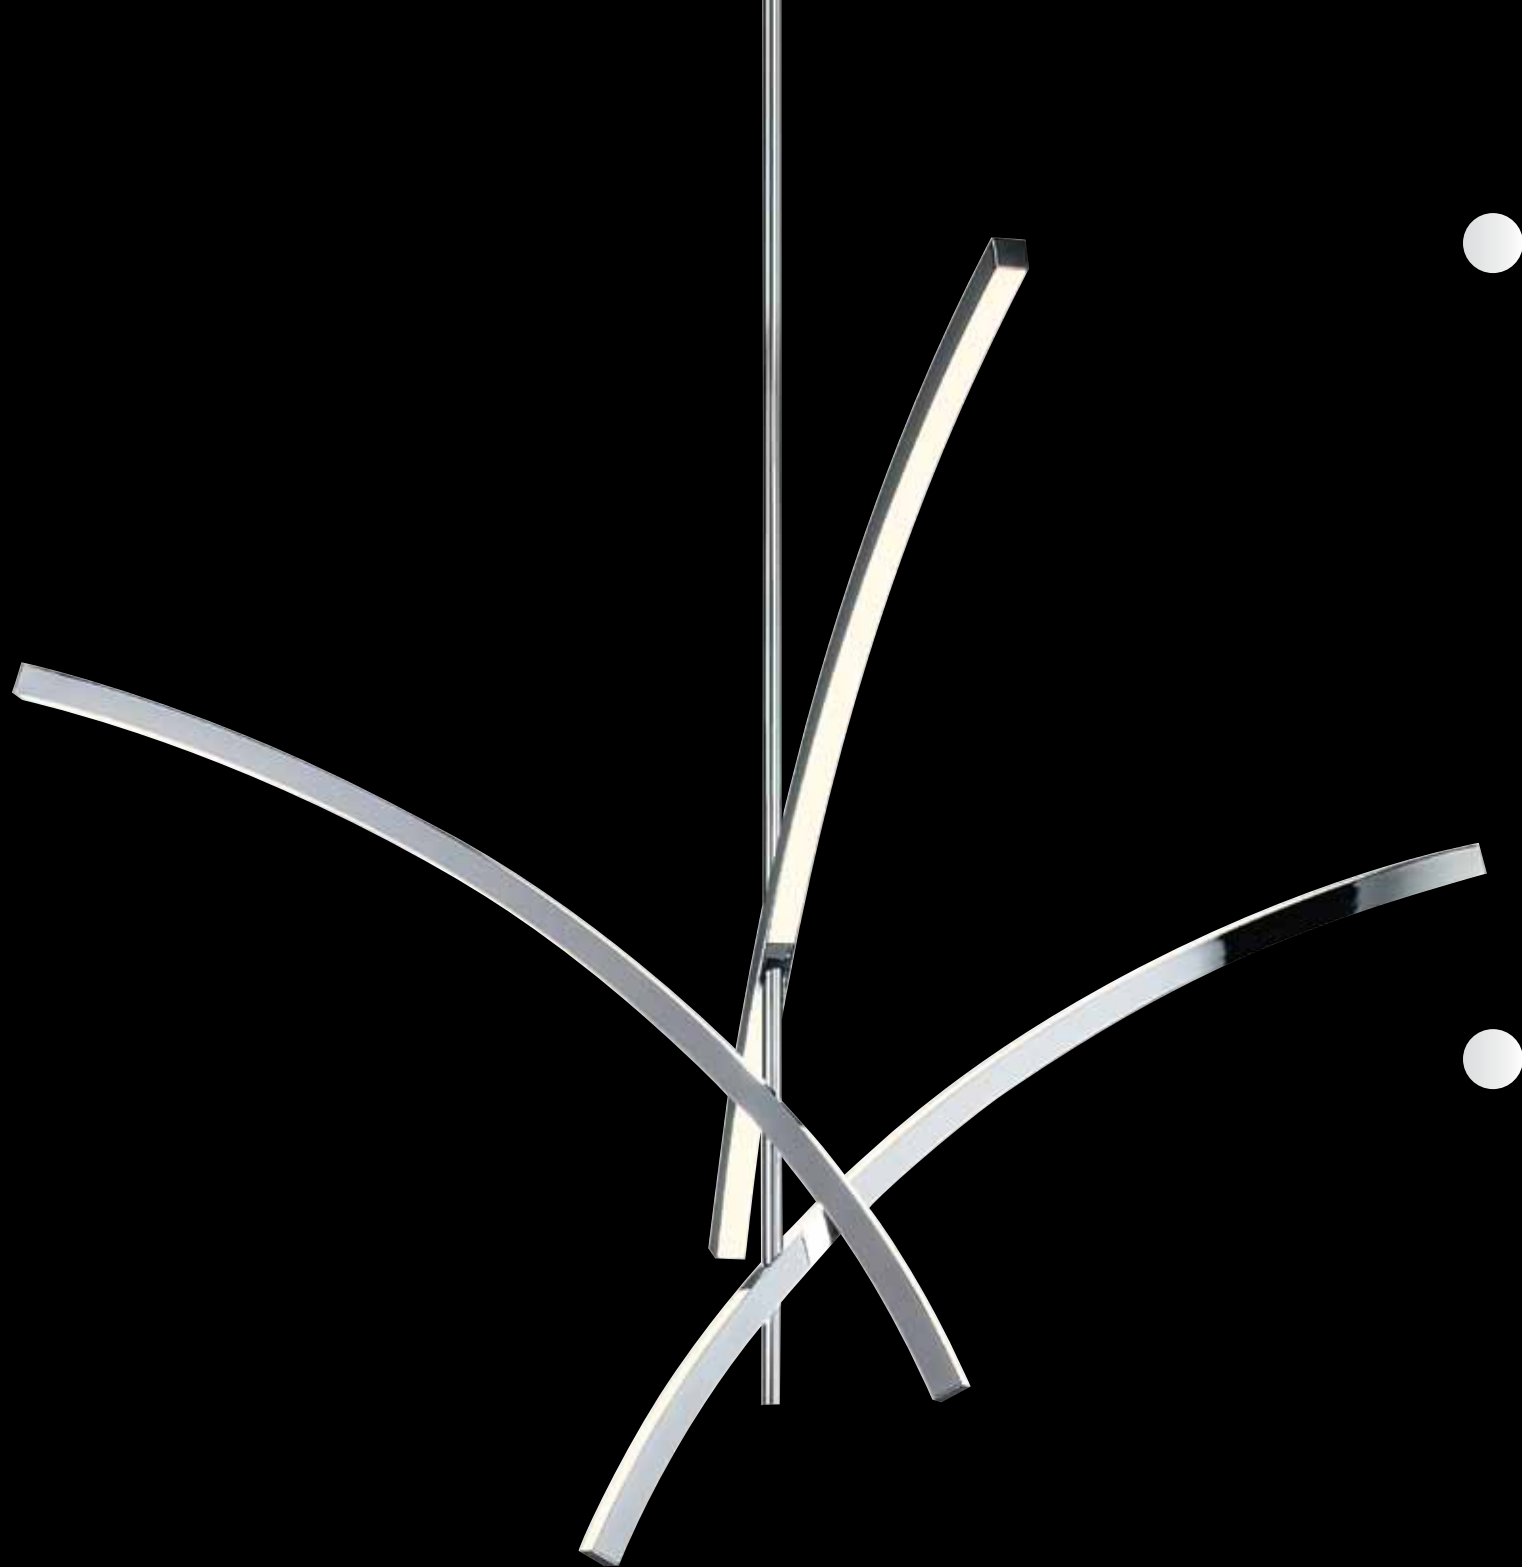


# gestures

Sweeping gestures from the featherlight hand of an artist's brush define this dramatic expression of luminous art. LED illumination radiates from the top and bottom faces of each sweeping arc to cast direct and indirect light within a space.



2583.25

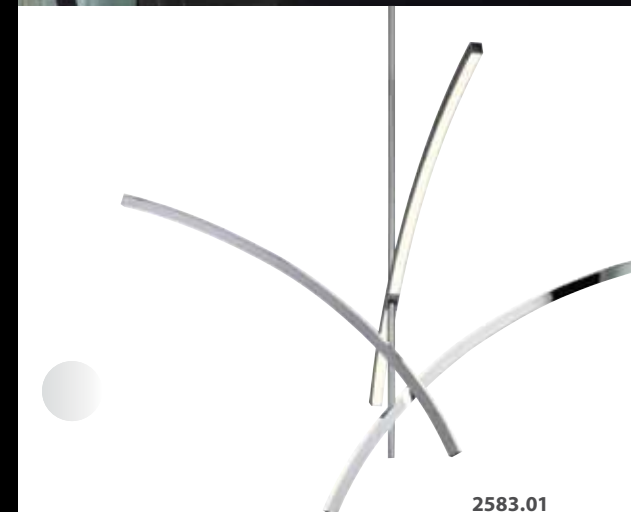


2583.01

## 2583

### Gestures 3-Arm LED Pendant


27" H x 39 1/2" DIA  
Shade: Aluminum w/Optical Acrylic Diffuser  
Canopy: 6" DIA  
Stem Kit: (3) 12" + (1) 6"  
LED: 75w, 4000 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2583.01** Polished Chrome  
**2583.25** Satin Black

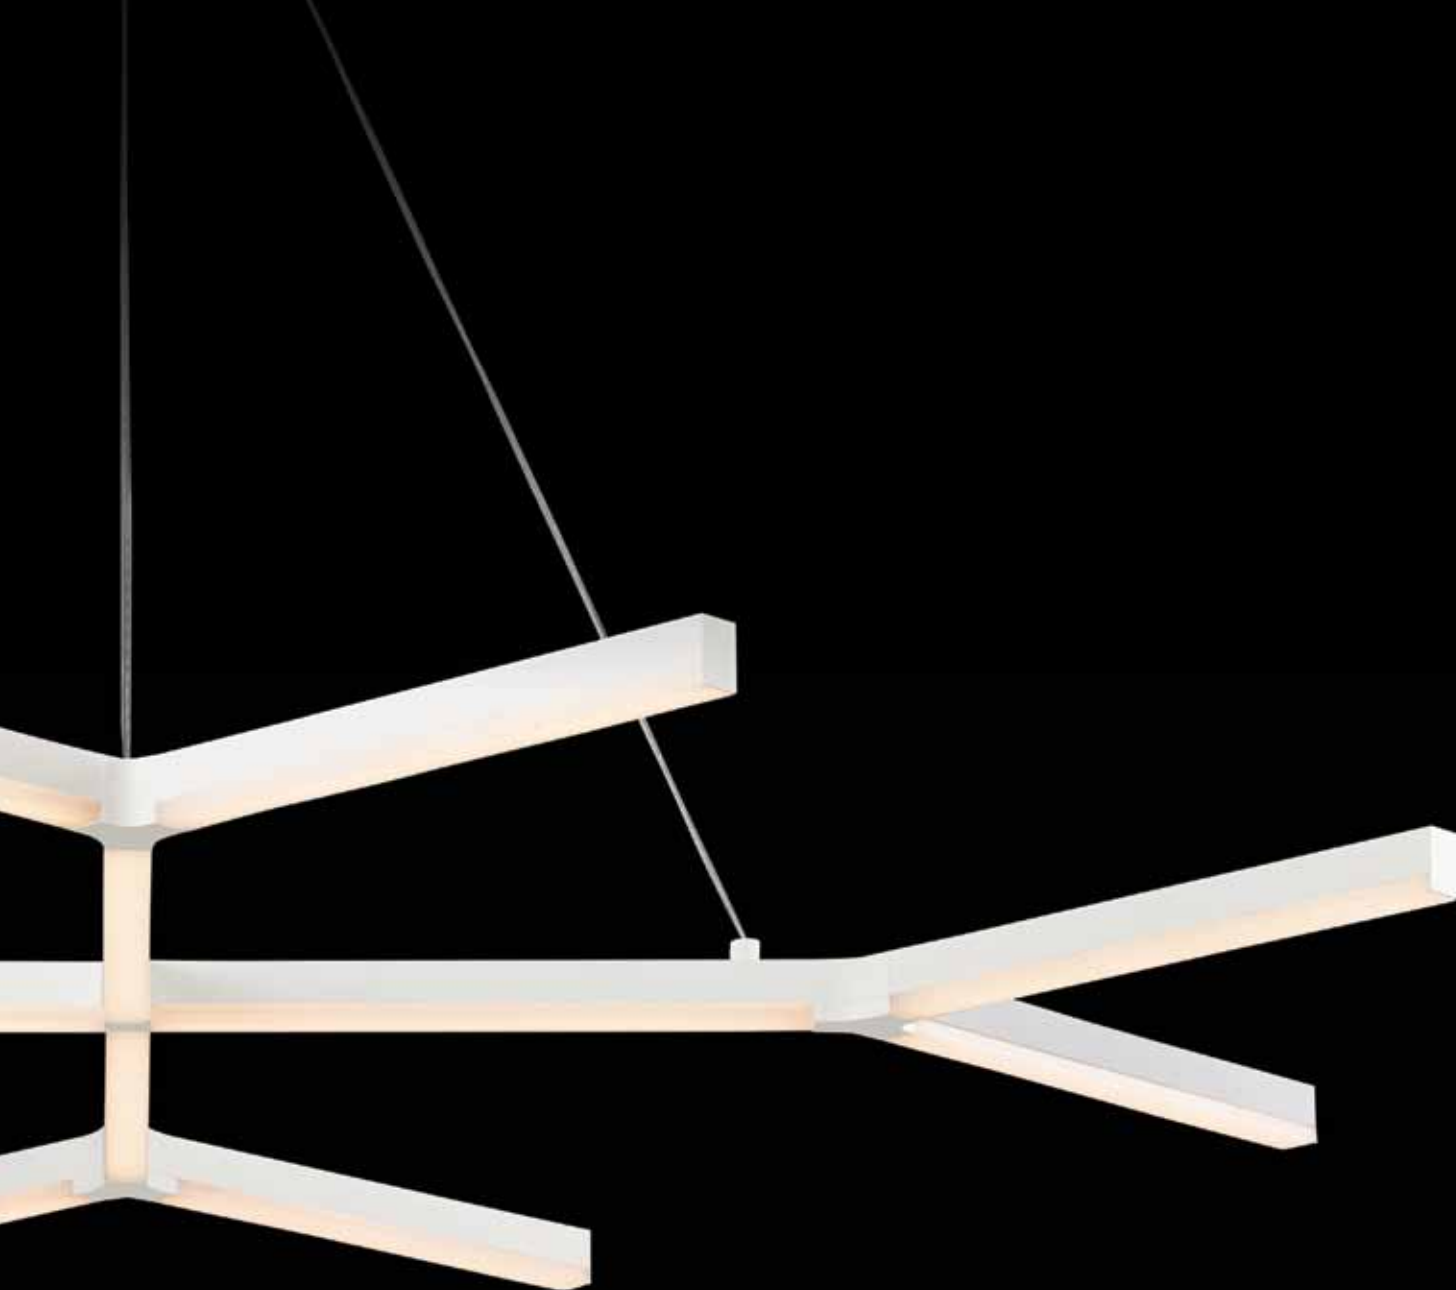

# quad-Y

Luminous bars form a symmetrical fractal pattern of intersecting Y shapes. Delicate and precise, this snowflake-like geometry casts its LED illumination evenly across a broad surface or area.

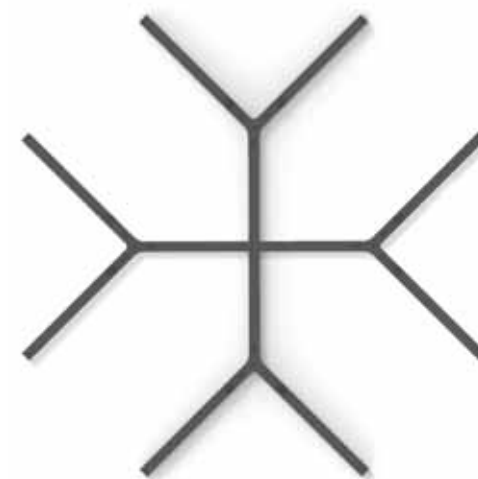

2775

## Quad-Y LED Pendant

1 1/2" H x 46 1/2" DIA  
 Shade: Optical Acrylic  
 Canopy: 4 1/2" sq w/6' Adjustable Cord  
 LED: 115w, 6430 Lumens  
 Warm White (3000K), 90 CRI  
 120VAC Input w/12VAC Transformer  
 Dimmable by Electronic Low Voltage (ELV)

**2775.03** Satin White  
**2775.25** Satin Black



2774.03



2773.25



2774

**Bi-Y LED Pendant**

1 1/2" H x 36 3/4" W x 18" D  
Shade: Optical Acrylic  
Canopy: 4 1/2" sq w/6' Adjustable Cord  
LED: 54w, 2870 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)

**2774.03** Satin White  
**2774.25** Satin Black

## bi-Y

Linear illumination often ends abruptly, leaving the ends of a surface in dark shadows. Bi-Y distributes its LED illumination radially from the center of each Y intersection, casting illumination broadly along its perfectly balanced minimal profile.



2773

**Y LED Pendant**

1 1/2" H x 32 1/2" DIA  
Shade: Optical Acrylic  
Canopy: 4 1/2" sq w/6' Adjustable Cord  
LED: 40w, 2000 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)

**2773.03** Satin White  
**2773.25** Satin Black

## Y





Delicate simplicity from a pure geometric expression provides radially distributed LED illumination in perfect balance around its intersecting center.





## stix-bars

LED illumination from the most minimal geometric profile achieves the Modernist architectural ideal of "Less is more."

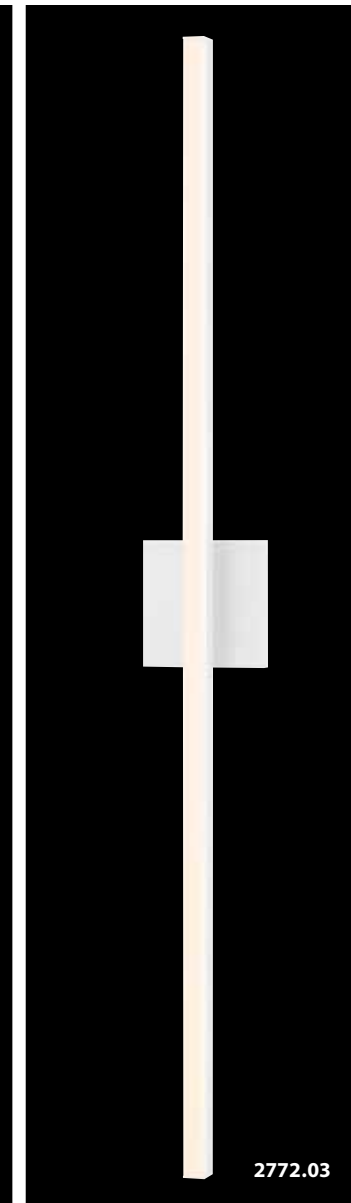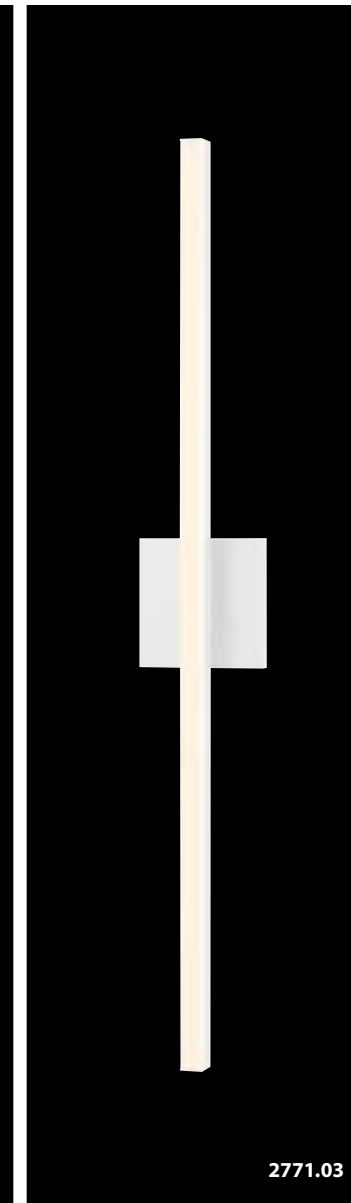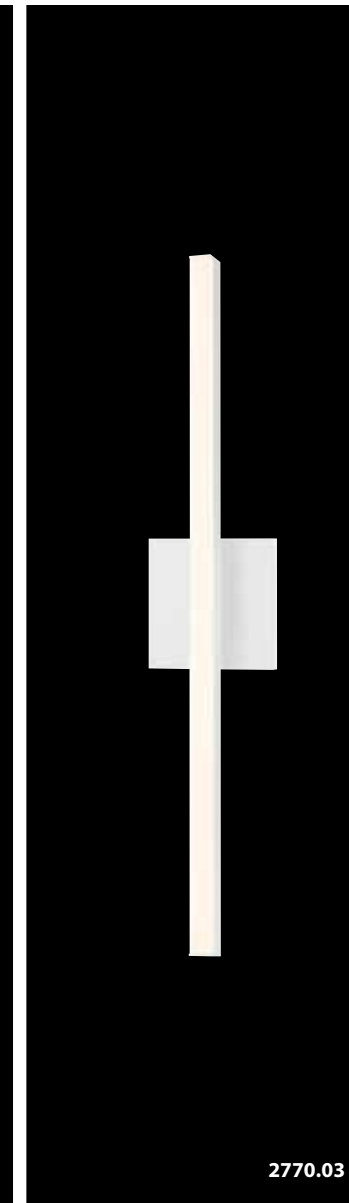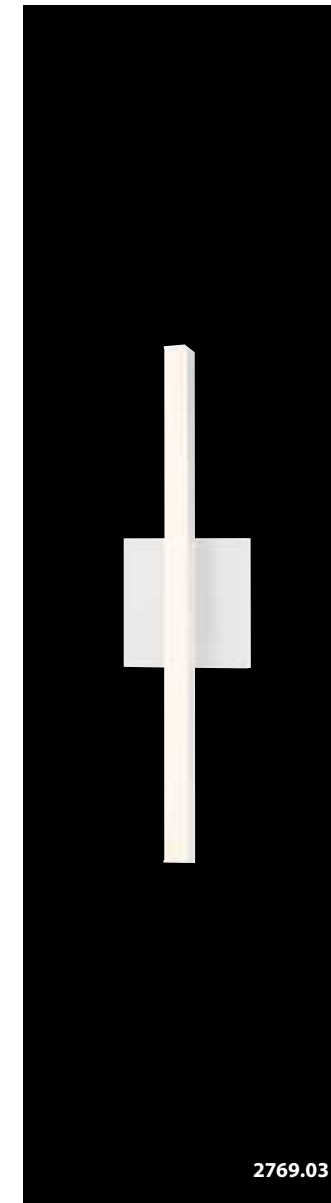

### 2769

#### Stix 18" LED Bath Bar

17 1/4" H x 3/4" W  
Shade: Optical Acrylic  
Extension: 1 1/2"  
Wall Plate: 4 1/2" sq  
LED: 16w, 720 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by  
Electronic Low Voltage (ELV)

#### ADA

**2769.03** Satin White  
**2769.16** Bright Satin Aluminum  
**2769.25** Satin Black

### 2770

#### Stix 24" LED Bath Bar

24 3/4" H x 3/4" W  
Shade: Optical Acrylic  
Extension: 1 1/2"  
Wall Plate: 4 1/2" sq  
LED: 21w, 1120 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by  
Electronic Low Voltage (ELV)

#### ADA

**2770.03** Satin White  
**2770.16** Bright Satin Aluminum  
**2770.25** Satin Black

### 2771

#### Stix 32" LED Bath Bar

32 1/4" H x 3/4" W  
Shade: Optical Acrylic  
Extension: 1 1/2"  
Wall Plate: 4 1/2" sq  
LED: 30w, 1390 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by  
Electronic Low Voltage (ELV)

#### ADA

**2771.03** Satin White  
**2771.16** Bright Satin Aluminum  
**2771.25** Satin Black


### 2772

#### Stix 40" LED Bath Bar

40" H x 3/4" W  
Shade: Optical Acrylic  
Extension: 1 1/2"  
Wall Plate: 4 1/2" sq  
LED: 35w, 1750 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by  
Electronic Low Voltage (ELV)

#### ADA

**2772.03** Satin White  
**2772.16** Bright Satin Aluminum  
**2772.25** Satin Black

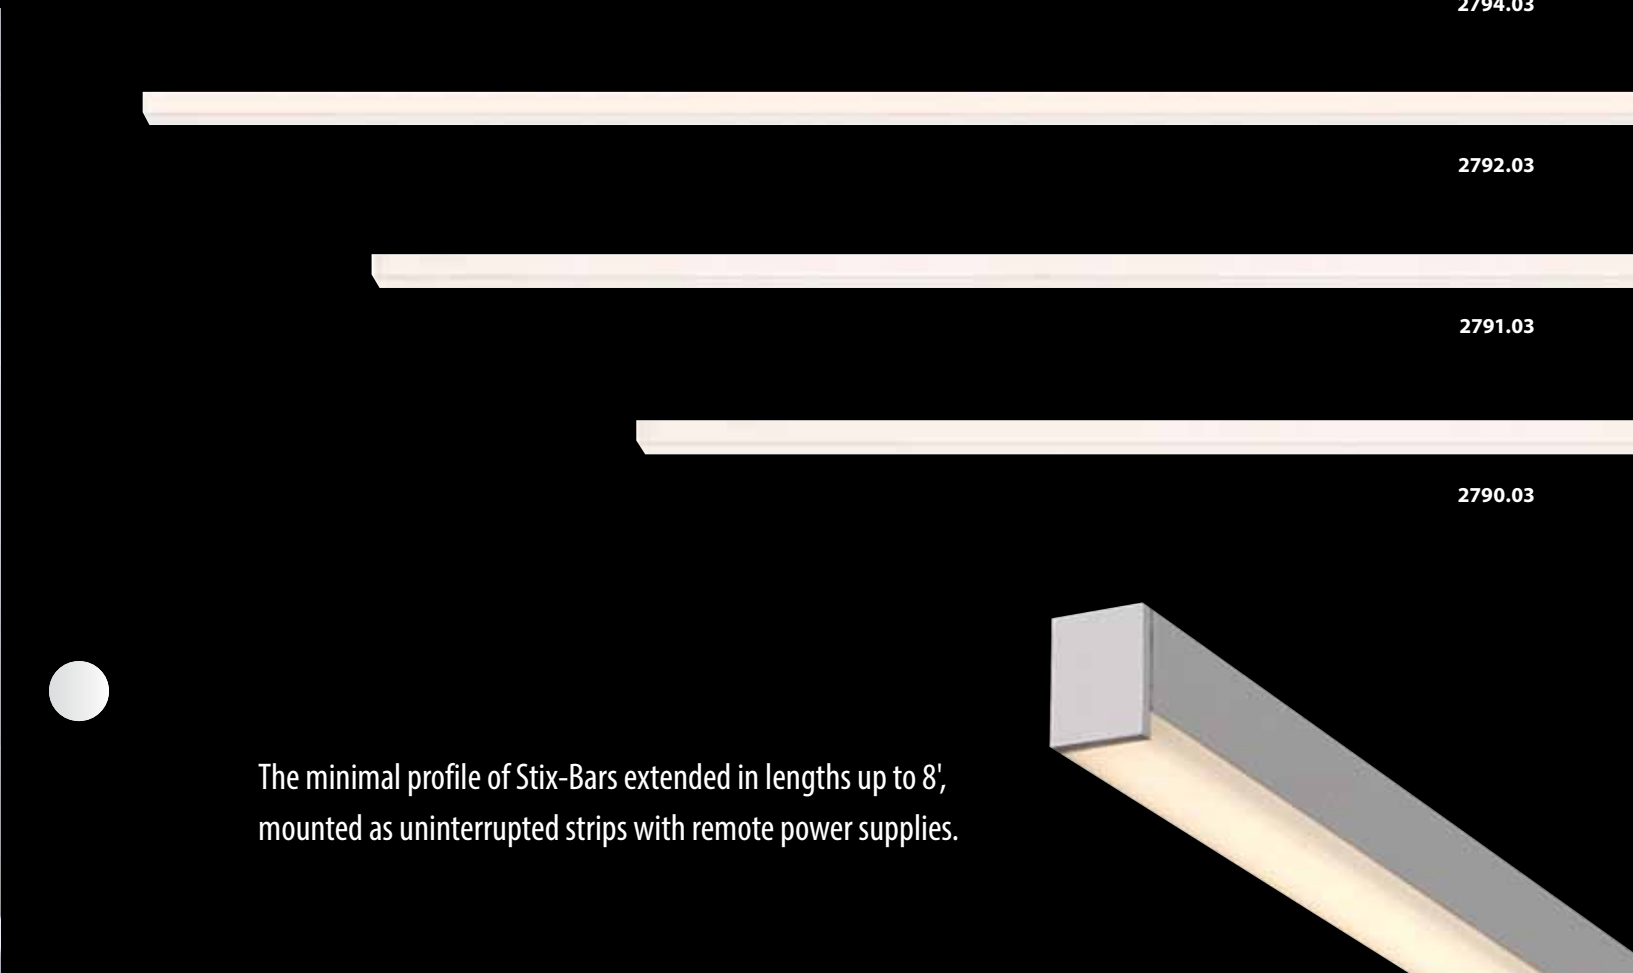

The minimal profile of Stix-Bars extended in lengths up to 8',  
mounted as uninterrupted strips with remote power supplies.

# stix-bars plus

2790

Stix Plus 48" LED Wall Bar

49" w x 3/4" h  
Shade: Optical Acrylic  
Extension: 1"  
LED: 43w, 2090 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

ADA

- 2790.03 Satin White
- 2790.16 Bright Satin Aluminum
- 2790.25 Satin Black

2791

Stix Plus 60" LED Wall Bar

60 3/4" w x 3/4" h  
Shade: Optical Acrylic  
Extension: 1"  
LED: 54w, 2660 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

ADA

- 2791.03 Satin White
- 2791.16 Bright Satin Aluminum
- 2791.25 Satin Black

2792

Stix Plus 72" LED Wall Bar

72" w x 3/4" h  
Shade: Optical Acrylic  
Extension: 1"  
LED: 64w, 3150 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)

ADA

- 2792.03 Satin White
- 2792.16 Bright Satin Aluminum
- 2792.25 Satin Black


2794

Stix Plus 98" LED Wall Bar

98 1/2" w x 3/4" h  
Shade: Optical Acrylic  
Extension: 1"  
LED: 86w, 4210 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Remote Transformer  
Dimmable by Electronic Low Voltage (ELV)


ADA

- 2794.03 Satin White
- 2794.16 Bright Satin Aluminum
- 2794.25 Satin Black

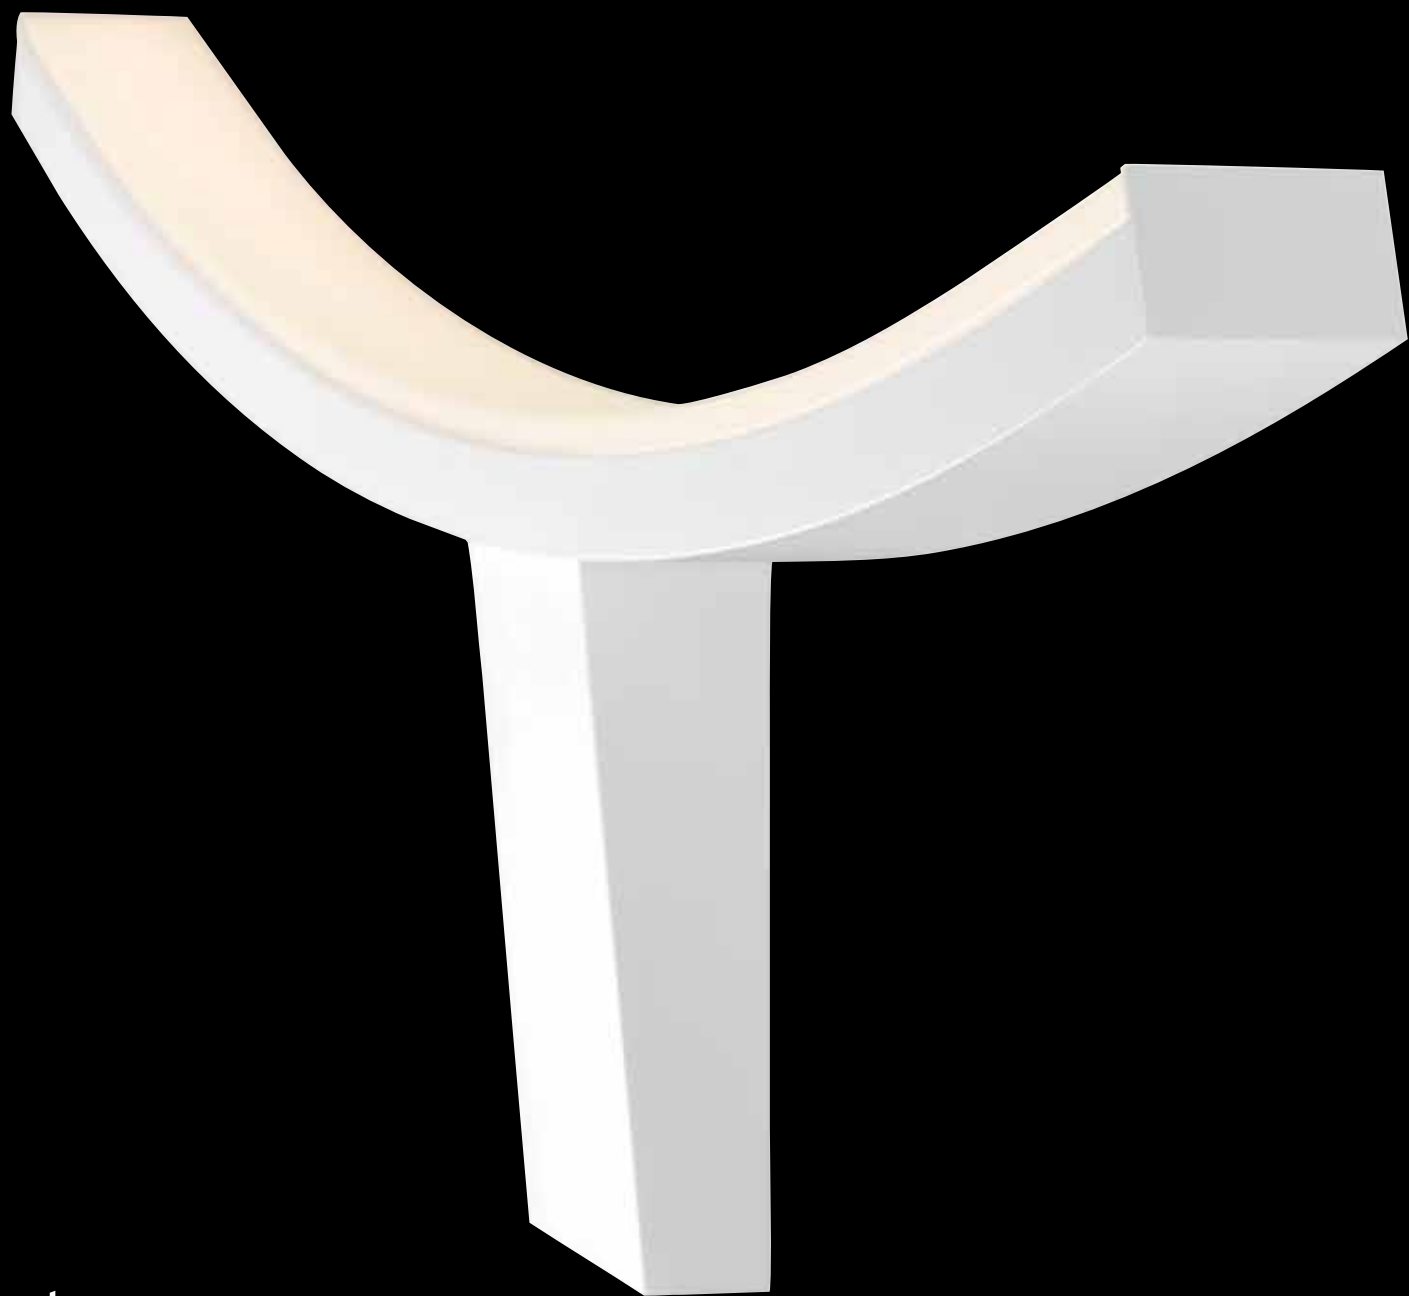


tao

Universal energy is expressed through the harmony of thoughtfully conceived and precisely executed design. This large-scale symmetrical arc set upon a plinth radiates LED illumination in coherence with the simplicity of its form.



tao

2782.03



dao

2780.03



2782.03

2782

Tao LED Wall Torchiera

9 3/4" h x 29" w  
Shade: Optical Acrylic  
Extension: 2 1/4"  
Wall Plate: 6 1/2" x 3"  
LED: 53w, 2880 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
Dimmable by Electronic Low Voltage (ELV)  
**ADA**

**2782.03** Satin White  
**2782.25** Satin Black

2780

Dao LED Wall Torchiera

8" h x 16 1/4" w  
Shade: Optical Acrylic  
Extension: 2 1/4"  
Wall Plate: 6 1/2" x 3"  
LED: 35w, 1740 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
Dimmable by Electronic Low Voltage (ELV)  
**ADA**

**2780.03** Satin White  
**2780.25** Satin Black

dao

Derived from and connected to its larger sister Tao, Dao is smaller in size to provide LED illumination on a more minimal scale.



# chroma



2375.25



2375.16

## 2375

**Chroma Small Sconce**

16 1/4" H x 9 3/4" W

Shade: Dichroic Glass

1 3/4" H x 9 3/4" W x 2 3/4" D

Extension: 3"

Wall Plate: 4 3/4" x 3 1/2"

Bulb: (1) LED MR16, GU10 Base

**ADA**

**2375.03** Satin White


**2375.16** Bright Satin Aluminum

**2375.25** Satin Black




2375.03

Chroma excites and delights as light is projected through and reflected by two angled panes of dichroic glass in alternating colors, and transforms surfaces into an extraordinary chromatic display while illuminating its surroundings.

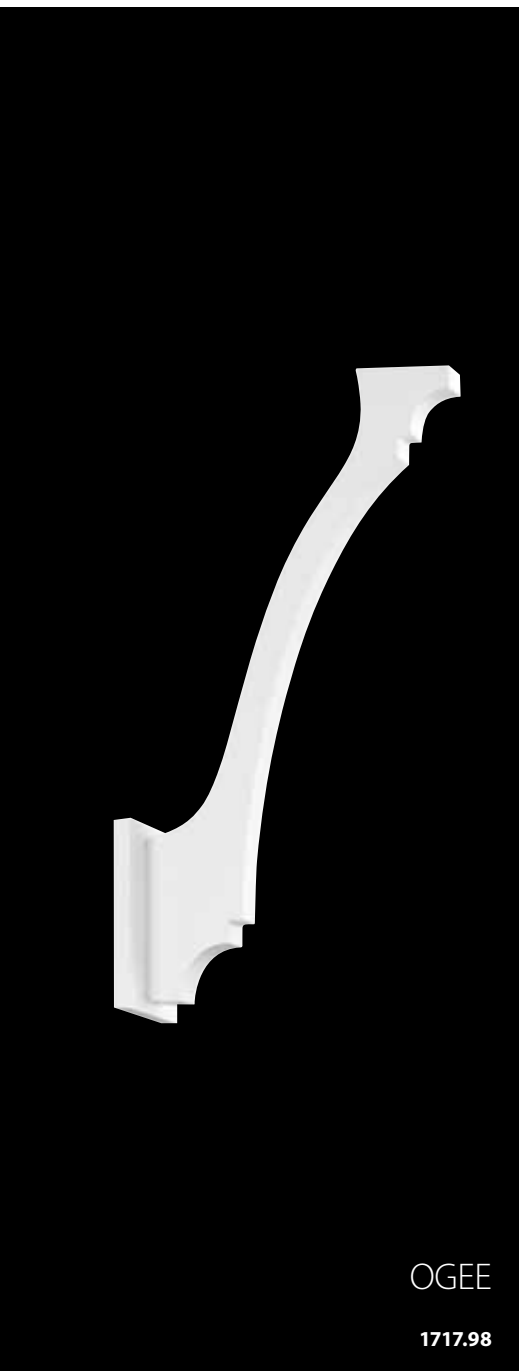


OGEE

1717.98

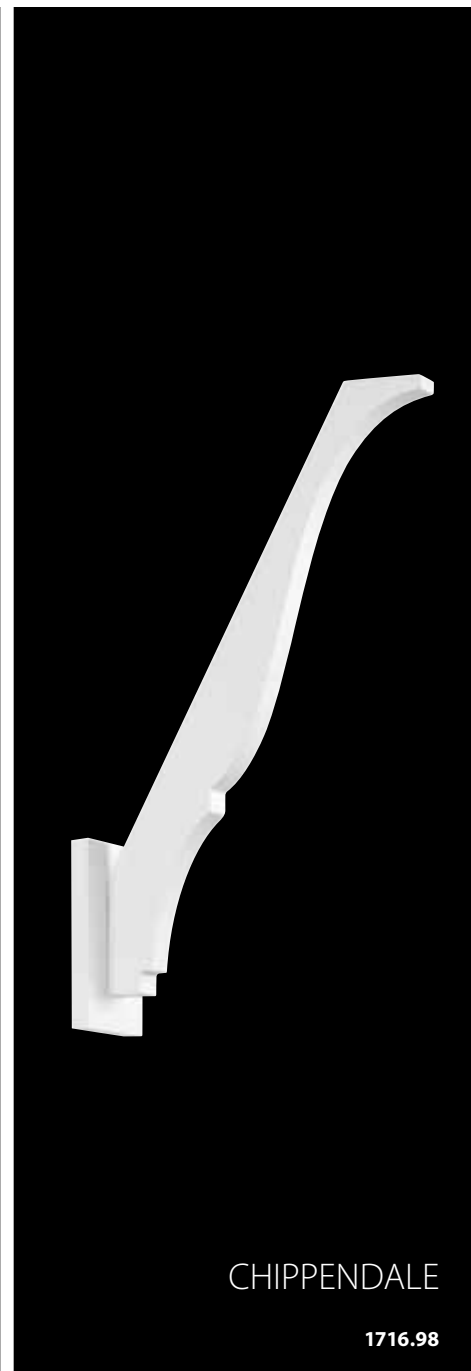

CHIPPENDALE

1716.98

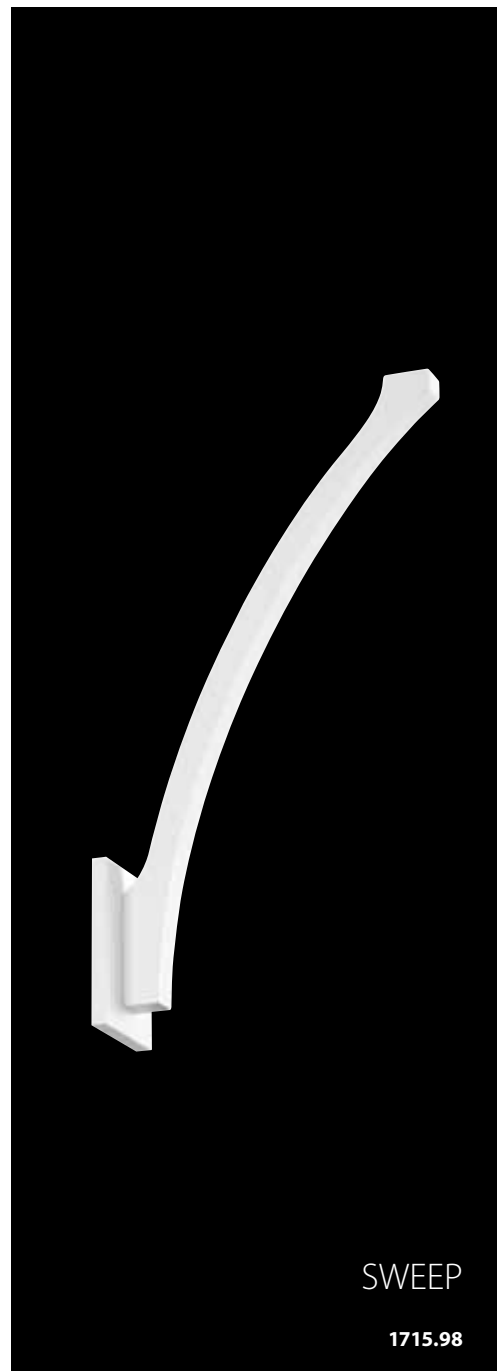

SWEEP

1715.98

1717

#### Profili Ogee LED Sconce

10 3/4" H x 3/4" W  
Shade: Die-Cast Aluminum  
Extension: 5 3/4"  
Wall Plate: 3 1/4" x 2 1/4"  
LED: 10w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
in included Mini Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

1717.98 Textured White

1716

#### Profili Chippendale LED Sconce

10 1/4" H x 3/4" W  
Shade: Die-Cast Aluminum  
Extension: 6"  
Wall Plate: 3 1/4" x 2 1/4"  
LED: 10w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
in included Mini Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

1716.98 Textured White

1715

#### Profili Sweep LED Sconce

11 3/4" H x 3/4" W  
Shade: Die-Cast Aluminum  
Extension: 6 1/2"  
Wall Plate: 3 1/4" x 2 1/4"  
LED: 10w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
in included Mini Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

1715.98 Textured White



profili

Imagined by Peter Polick as delicate slivers of classic architectural details, these minimal sections punctuate a space with a nod to the traditional characteristics of decorative ornamentation and a touch of Post-Modernism. LED illumination is reflected from the surface on which the fixture is perched.



# kabu

Curved along its length in a subtly tapered arc and flared from top to bottom, the complexity of this Zen-like shape is hidden in its simplicity, but becomes apparent in the functionality with which it renders LED light onto a surface. Kabu's bold but gentle subtlety is scaled in two sizes.



1740

**Kabu Small LED Pendant**

2 3/4" H x 12" W x 2 1/4" D  
Shade: Aluminum w/Optical Acrylic Diffuser  
Canopy: 4 1/2" sq w/6' Adjustable Cord  
LED: 13w, 900 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

**1740.16** Bright Satin Aluminum  
**1740.98** Textured White

1742

**Kabu Large LED Pendant**

4 1/4" H x 29" W x 3" D  
Shade: Aluminum w/Optical Acrylic Diffuser  
Canopy: 4 1/2" sq w/6' Adjustable Cord  
LED: 20w, 1730 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

**1742.16** Bright Satin Aluminum  
**1742.98** Textured White





# haro

Offset circles on opposing angled planes capture an illuminated ring of LED light. Look through the suspended volume to the space beyond as light radiates inward and outward.



1754.98



1754.16



1754.25

## 1754


### Haro 16" LED Pendant

15 3/4" DIA X 2 3/4" D  
Shade: Die-Cast Aluminum w/Optical Acrylic Diffuser  
Canopy: 4 1/2" DIA w/6' Adjustable Cord  
LED: 68w, 4000 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)

**1754.16** Bright Satin Aluminum

**1754.25** Satin Black

**1754.98** Textured White

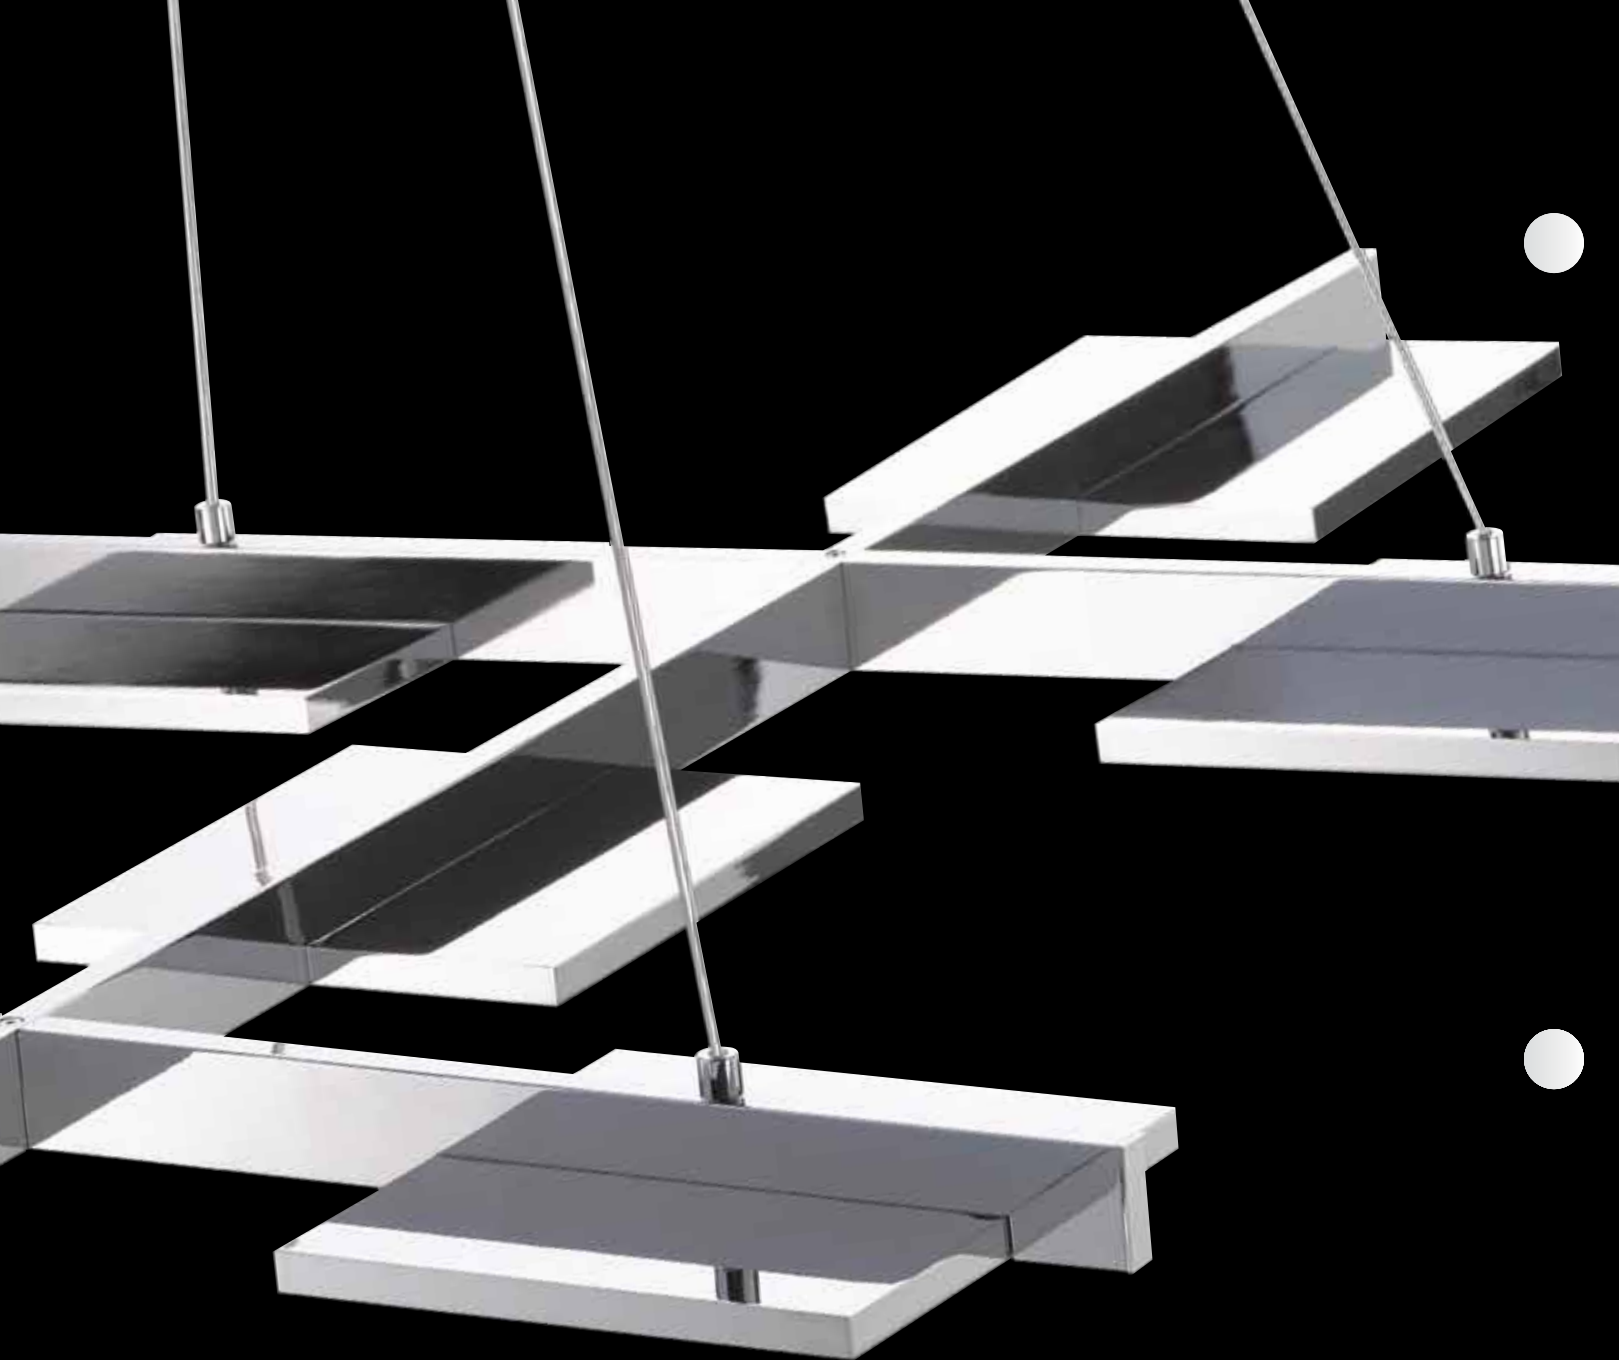

# panels

Crisp-edged square panels in polished chrome, precisely arranged on rectangular bars, form rectilinear compositions in multiple configurations along a horizontal plane. Technologically advanced, edge-lit LED light panels distribute glare-free illumination evenly across each luminous surface.



2577

Panels 7-Light Rectangle LED Pendant

1 1/2" H x 39" W x 23 3/4" D

Shade: Die-Cast Aluminum w/LED Flat Panel

1/2" H x 6" SQ

Canopy: 4 1/2" SQ w/6' Adjustable Cord

LED (7): 56w (total), 3260 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer

in Outlet Box

Dimmable by Electronic

Low Voltage (ELV)

**2577.01** Polished Chrome

2577.01





## panels



**2570.01**

**2570**

**Panels LED Wall Torchiera**

4 1/2" H x 6" W

Shade: Die-Cast Aluminum w/LED Flat Panel

1/2" H x 6" SQ

Extension: 8 1/4"

Wall Plate: 4 1/2" SQ

LED: 10w, 470 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer

in Outlet Box

Dimmable by Electronic

Low Voltage (ELV)

**2570.01** Polished Chrome

**2576**

**Panels 4-Light Square LED Pendant**

1 1/2" H x 21 1/4" SQ

Shade: Die-Cast Aluminum w/LED Flat Panel

1/2" H x 6" SQ

Canopy: 4 1/2" SQ w/6' Adjustable Cord

LED (4): 34w (total), 1860 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer

in Outlet Box

Dimmable by Electronic

Low Voltage (ELV)

**2576.01** Polished Chrome



**2576.01**





2575.01

## 2575

### Panels 5-Light LED Bar Pendant

6 3/4" H x 44 1/4" W x 6" D  
Shade: Die-Cast Aluminum w/LED Flat Panel  
1/2" H x 6" SQ  
Canopy: 19" x 4 1/2" w/6' Adjustable Cord  
LED (5): 41w (total), 2330 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

2575.01 Polished Chrome



2574.01

## 2574

### Panels 4-Light LED Bar Pendant

6 3/4" H x 35 1/4" W x 6" D  
Shade: Die-Cast Aluminum w/LED Flat Panel  
1/2" H x 6" SQ  
Canopy: 10 1/4" x 4 1/2" w/6' Adjustable Cord  
LED (4): 34w (total), 1860 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

2574.01 Polished Chrome




2573.01

## 2573

### Panels 3-Light LED Bar Pendant

6 3/4" H x 26 1/2" W x 6" D  
Shade: Die-Cast Aluminum w/LED Flat Panel  
1/2" H x 6" SQ  
Canopy: 10 1/4" x 4 1/2" w/6' Adjustable Cord  
LED (3): 27w (total), 1400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

2573.01 Polished Chrome

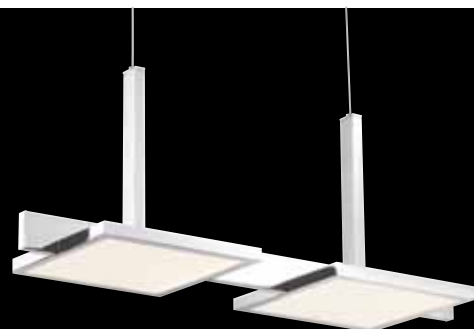


2572.01

## 2572

### Panels Double LED Pendant

6 3/4" H x 17 1/4" W x 6" D  
Shade: Die-Cast Aluminum w/LED Flat Panel  
1/2" H x 6" SQ  
Canopy: 10 1/4" x 4 1/2" w/6' Adjustable Cord  
LED (2): 19w (total), 930 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/24VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

2572.01 Polished Chrome

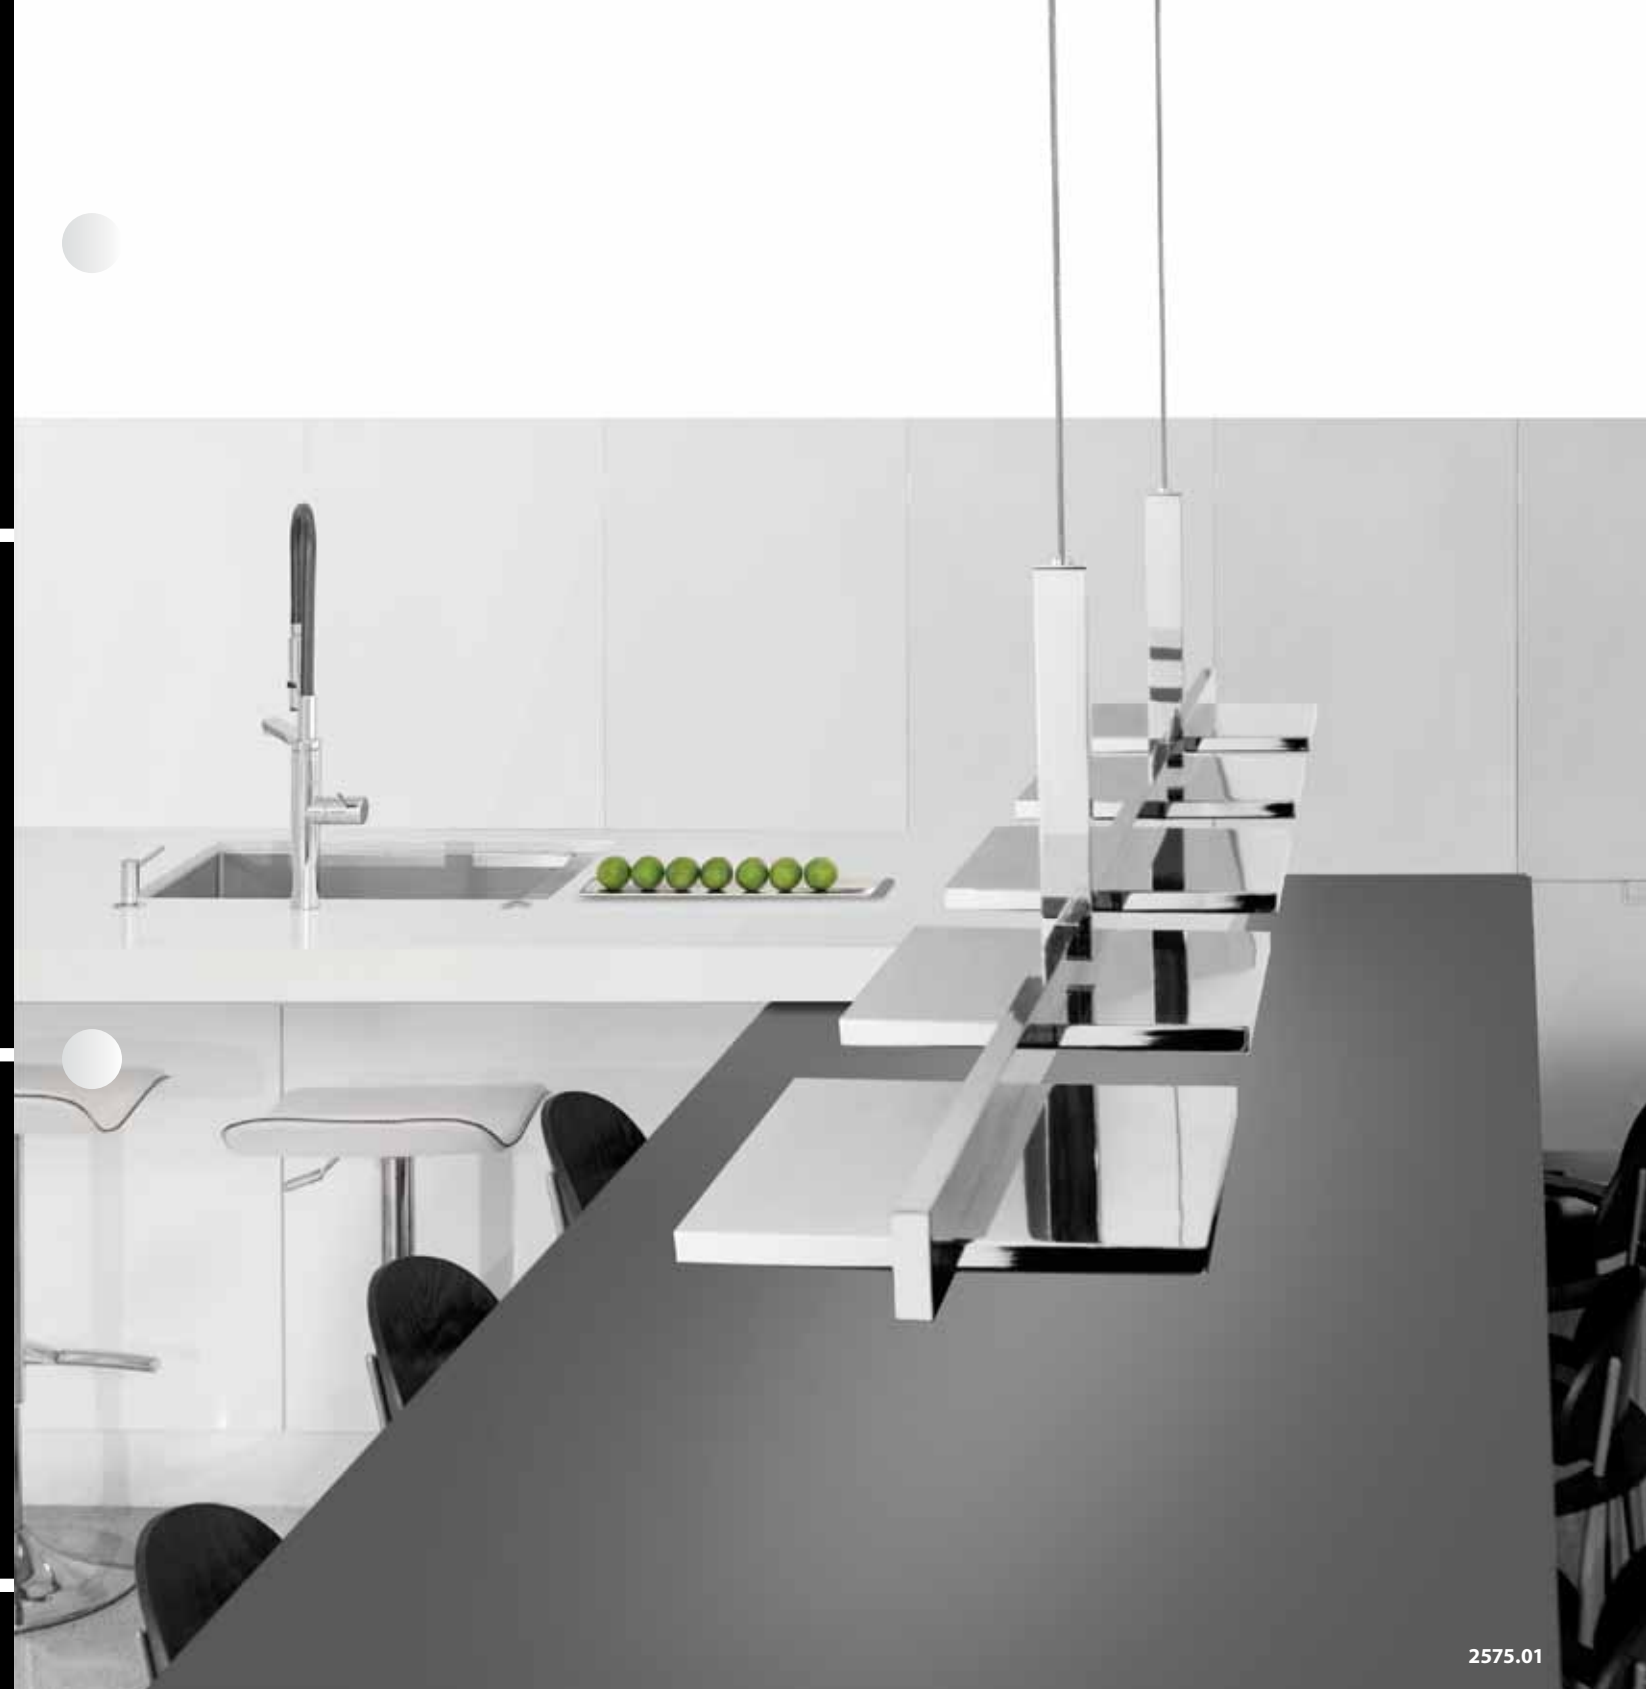

2575.01

panels

# bauhaus revisited

Reimagined in a timeless contemporary style, these LED luminaires are rooted in the Bauhaus ideal of Industrial Modernism. A compelling logic of utility with a straightforward approach to construction defines the Mid-Century Modern aesthetic.



2495

**Bauhaus Revisited Rohr LED Pendant**

7 1/4" H x 32" W x 2 1/4" D  
 Shade: White Etched Glass  
 23" W x 2" DIA W/270° Rotation  
 Stem Kit: (6) 12" + (2) 6"  
 Canopy: 21" x 4 1/2"  
 LED: 15w, 1200 Lumens  
 Warm White (3000K), 90 CRI  
 120VAC Input w/LED Driver in Outlet Box  
 Dimmable by Electronic Low Voltage (ELV)  
 or Standard (TRIAC) Incandescent

**2495.01** Polished Chrome  
**2495.23** Satin Chrome





2495.01



# bauhaus revisited

ROHR SHORT SCONCE

This cylindrical glass sconce rotates to direct LED illumination as desired. Detailed with perfectly machined fittings, this wall-mounted fixture glorifies the industrial aesthetic that was Bauhaus.

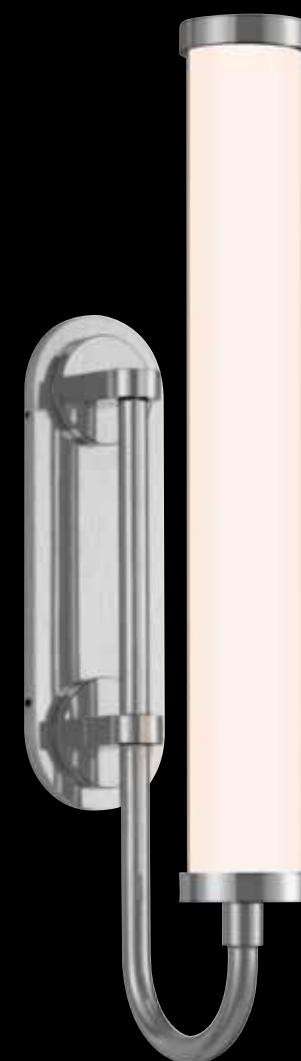

2490.23

2490

**Bauhaus Revisited Rohr Short LED Sconce**

18" H x 2 3/4" W

Shade: White Etched Glass

14 1/4" H x 2" DIA w/270° Rotation

Extension: 5 1/2"

Wall Plate: 8 3/4" x 2 3/4"

LED: 10w, 840 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**2490.01** Polished Chrome

**2490.23** Satin Chrome



2490.01





# bauhaus revisited

## ROHR TALL SCONCE

Bent chrome arms support a rotating glass tube with a chrome reflector panel, providing directional LED illumination along its length. Connected by solid geometric fittings, this composition defines its functionality in the ethos of Bauhaus, echoing the enduring appeal of the soft bends of a Breuer chair.

## 2492

### Bauhaus Revisited Rohr Tall LED Sconce

29 1/2" H x 2 3/4" W  
Shade: White Etched Glass  
23" H x 2" DIA w/270° Rotation  
Extension: 5 1/2"  
Wall Plate: 15 3/4" x 2 3/4"  
LED: 15w, 1200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

**2492.01** Polished Chrome

**2492.23** Satin Chrome

## 2493

### Bauhaus Revisited Klammer Tall LED Sconce

31" H x 2 3/4" W  
Shade: White Etched Glass  
23" H x 2" DIA w/270° Rotation  
Extension: 3 3/4"  
Wall Plate: 31" x 2 3/4"  
LED: 15w, 1200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

**ADA**

**2493.01** Polished Chrome

**2493.23** Satin Chrome

## 2491

### Bauhaus Revisited Klammer Short LED Sconce

22 1/2" H x 2 3/4" W  
Shade: White Etched Glass  
14 1/4" H x 2" DIA w/270° Rotation  
Extension: 3 3/4"  
Wall Plate: 22 1/2" x 2 3/4"  
LED: 10w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent

**ADA**

**2491.01** Polished Chrome

**2491.23** Satin Chrome

## KLAMMER SCONCES

Scaled in two sizes, these cylindrical glass fixtures are mounted on bent chrome brackets and rotate to direct LED illumination as desired.



# dazzle slim

LED illumination shimmers brilliantly through hundreds of crushed and fused glass nuggets set in a slim profile.

## dazzle

### 2560

**Dazzle 18" LED Bath Bar**  
5" H x 18" W  
Shade: Clear Crushed Glass  
Extension: 1 3/4"  
Wall Plate: 4 1/4" x 16"  
LED: 20w, 1200 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2560.01** Polished Chrome

### 2561

**Dazzle 24" LED Bath Bar**  
5" H x 24" W  
Shade: Clear Crushed Glass  
Extension: 1 3/4"  
Wall Plate: 4 1/4" x 22"  
LED: 27w, 1600 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2561.01** Polished Chrome

### 2562

**Dazzle 36" LED Bath Bar**  
5" H x 36" W  
Shade: Clear Crushed Glass  
Extension: 1 3/4"  
Wall Plate: 4 1/4" x 34"  
LED: 40w, 2400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2562.01** Polished Chrome

### 2557

**Dazzle Slim 18" LED Bath Bar**  
18 1/4" H x 2 1/2" W  
Shade: Clear Crushed Glass  
Extension: 1 1/2"  
Wall Plate: 18 1/4" H x 2 1/2" W  
LED: 16w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2557.01** Polished Chrome

### 2558

**Dazzle Slim 24" LED Bath Bar**  
24" H x 2 1/2" W  
Shade: Clear Crushed Glass  
Extension: 1 1/2"  
Wall Plate: 24" H x 2 1/2" W  
LED: 23w, 1150 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2558.01** Polished Chrome

### 2559

**Dazzle Slim 36" LED Bath Bar**  
36" H x 2 1/2" W  
Shade: Clear Crushed Glass  
Extension: 1 1/2"  
Wall Plate: 36" H x 2 1/2" W  
LED: 30w, 1610 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2559.01** Polished Chrome





2567.01

2566.01

2565.01



2569.01



2568.01

Glittering and alive, LED points of light refract through hundreds of crushed and fused glass nuggets that dance and shimmer in a spectacular display.

dazzle

2565

**Dazzle 12" Round LED Pendant**

1 3/4" H x 12" DIA  
Shade: Clear Crushed Glass  
Canopy: 4 1/2" DIA, w/6' Adjustable Cable  
LED: 30w, 1800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**2565.01** Polished Chrome

2566

**Dazzle 8" Round LED Surface Mount**

1 3/4" H x 8" DIA  
Shade: Clear Crushed Glass  
Canopy: 6" DIA  
LED: 17w, 1000 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2566.01** Polished Chrome

2567

**Dazzle 12" Round LED Surface Mount**

1 3/4" H x 12" DIA  
Shade: Clear Crushed Glass  
Canopy: 10" DIA  
LED: 30w, 1800 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2567.01** Polished Chrome

2568

**Dazzle 6" Square LED Surface Mount**

1 3/4" H x 6" W x 6" D  
Shade: Clear Crushed Glass  
Canopy: 4 1/4" sq  
LED: 8w, 450 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2568.01** Polished Chrome

2569

**Dazzle 10" Square LED Surface Mount**

1 3/4" H x 10" W x 10" D  
Shade: Clear Crushed Glass  
Canopy: 8" sq  
LED: 25w, 1500 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC  
Transformer in Outlet Box  
Dimmable by Electronic  
Low Voltage (ELV)

**ADA**

**2569.01** Polished Chrome



# l'arc

This graceful curvature dramatically sweeps its LED illumination in reflection across an exterior or interior surface in a bold sculptural gesture. The sophistication of L'arc is scaled in two sizes, Grand and Petite.

7243.98-WL

7245.74-WL

7245.72-WL

## 7243

### L'arc Petite LED Sconce

18" H x 1 1/4" W  
Shade: Aluminum  
Extension: 6"  
Wall Plate: 4 1/2" sq  
LED: 18w, 1400 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7243.72-WL** Textured Bronze  
**7243.74-WL** Textured Gray  
**7243.98-WL** Textured White

## 7245

### L'arc Grand LED Sconce

24" H x 1 3/4" W  
Shade: Aluminum  
Extension: 6 3/4"  
Wall Plate: 4 1/2" sq  
LED: 18w, 1580 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7245.72-WL** Textured Bronze  
**7245.74-WL** Textured Gray  
**7245.98-WL** Textured White

We have expanded the scope and utility of new and existing products, defining a new category for indoor and outdoor use: **INSIDE-OUT™**




# midtown

The classic modern elegance of straightforward geometry sets a frosted glass rectangle against a crisp rectangular beam, radiating the glow of its LED illumination.


## 2724

**Midtown Short LED Sconce**  
10 3/4" H x 7" W  
Shade: Clear Etched Glass  
9" H x 7" W  
Extension: 4"  
Wall Plate: 4 1/2" sq  
LED: 14w, 1120 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

- 2724.72-WL** Textured Bronze
- 2724.74-WL** Textured Gray
- 2724.98-WL** Textured White

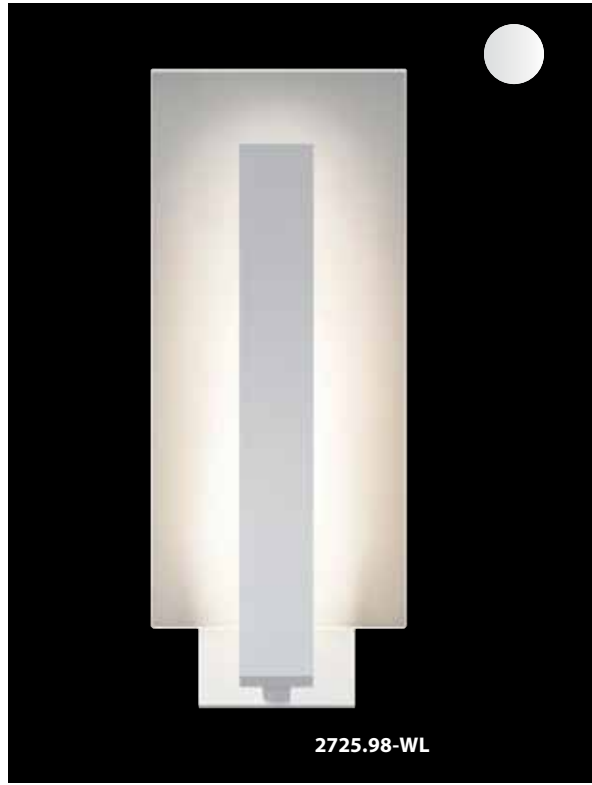

2725.98-WL

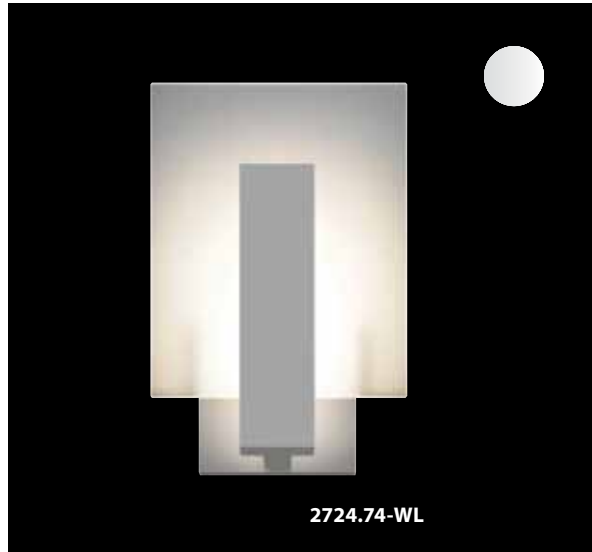

2724.74-WL

## 2725

**Midtown Tall LED Sconce**  
18" H x 7" W  
Shade: Clear Etched Glass  
16" H x 7" W  
Extension: 4"  
Wall Plate: 4 1/2" sq  
LED: 20w, 1600 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

- 2725.72-WL** Textured Bronze
- 2725.74-WL** Textured Gray
- 2725.98-WL** Textured White



7240.74-WL

## 7240

**Sword 24" LED Sconce**  
24 1/4" H x 1 3/4" W  
Shade: Aluminum  
Extension: 2 3/4"  
Wall Plate: 4 1/2" sq  
LED: 13w, 1190 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

- 7240.72-WL** Textured Bronze
- 7240.74-WL** Textured Gray
- 7240.98-WL** Textured White

# sword


The power of simplicity is defined by the less-is-more declaration of this rectangular blade of light.




7240.72-WL



7256.72-WL

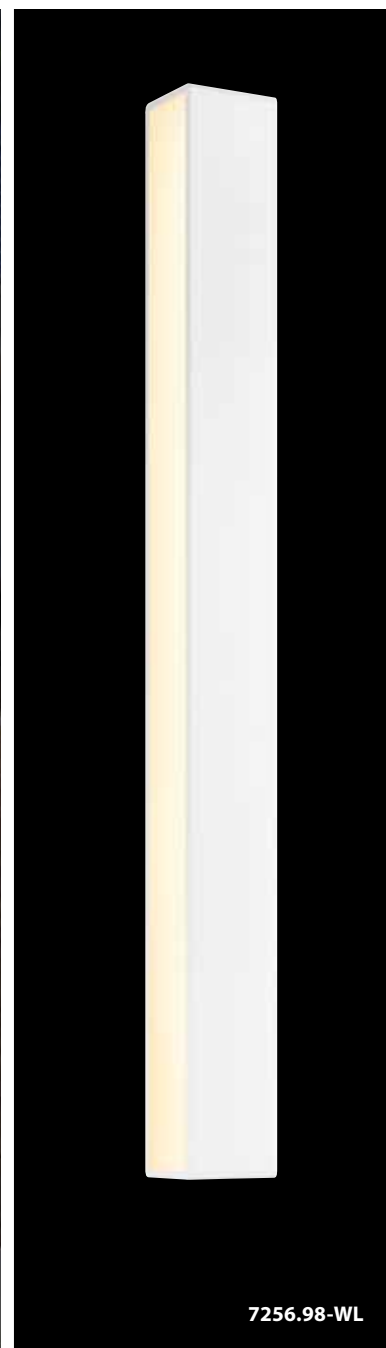

7256.98-WL

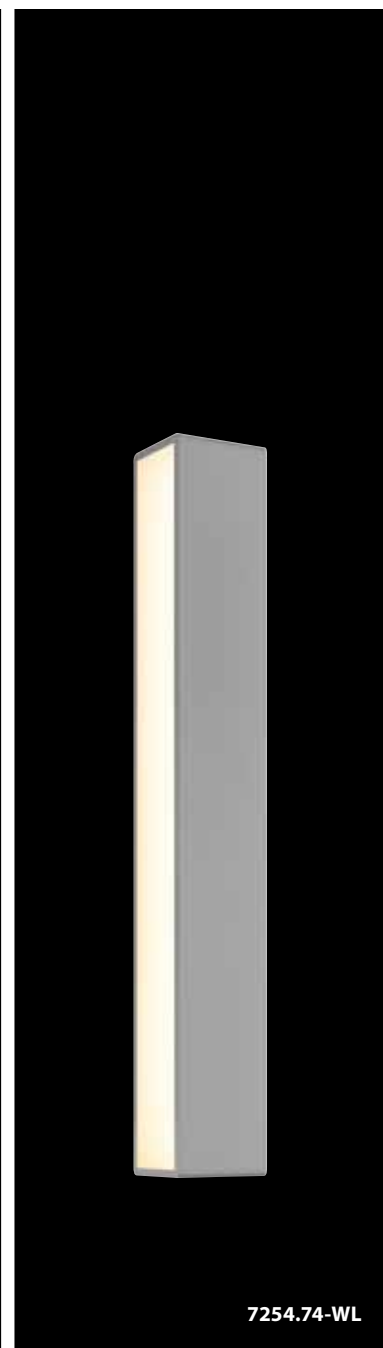


7254.74-WL



7250.74-WL



7252.98-WL

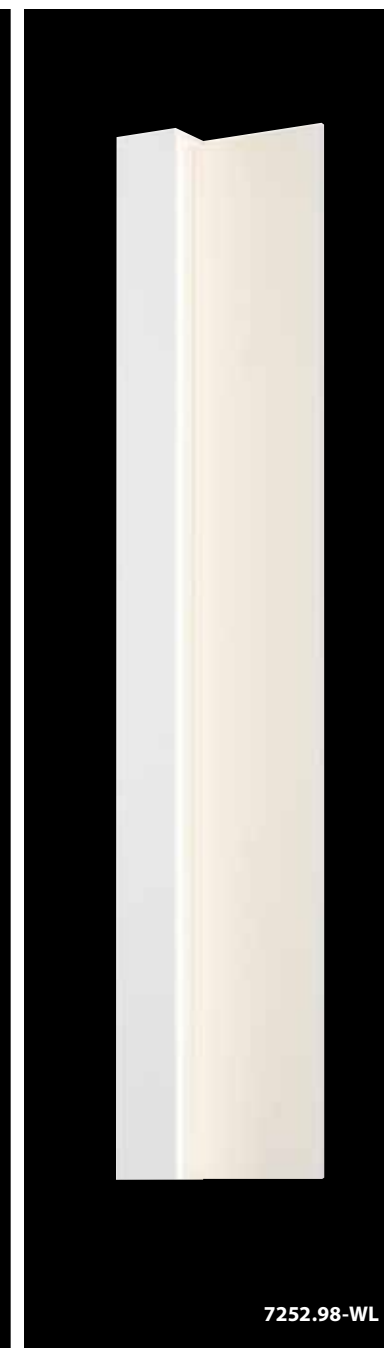

7250.72-WL



## sideways

Broad and powerful LED illumination projects from the sides of a simple linear profile.

### 7256

#### Sideways 36" LED Sconce

36 1/4" H x 3 1/4" W

Shade: Aluminum w/Optical Acrylic

Extension: 3 1/4"

Wall Plate: 35 3/4" x 2 1/2"

LED: 55w, 2690 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer

in Outlet Box

Dimmable by Electronic

Low Voltage (ELV)

**WET LOCATION (vertical mounting only)**  
**ADA**

**7256.72-WL** Textured Bronze

**7256.74-WL** Textured Gray

**7256.98-WL** Textured White

### 7254

#### Sideways 24" LED Sconce

24" H x 3 1/4" W

Shade: Aluminum w/Optical Acrylic

Extension: 3 1/4"

Wall Plate: 23 1/2" x 2 1/2"

LED: 31w, 1730 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/24VAC Transformer

in Outlet Box

Dimmable by Electronic

Low Voltage (ELV)

**WET LOCATION (vertical mounting only)**  
**ADA**

**7254.72-WL** Textured Bronze

**7254.74-WL** Textured Gray

**7254.98-WL** Textured White

### 7250

#### Radiance 20" LED Sconce

20" H x 5 3/4" W

Shade: Aluminum

Extension: 2 1/4"

Wall Plate: 18 3/4" x 4 3/4"

LED: 20w, 1680 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**WET LOCATION (vertical mounting only)**  
**ADA**

**7250.72-WL** Textured Bronze

**7250.74-WL** Textured Gray

**7250.98-WL** Textured White

### 7252

#### Radiance 30" LED Sconce

30" H x 5 3/4" W

Shade: Aluminum

Extension: 2 1/4"

Wall Plate: 29" x 4 3/4"

LED: 29w, 2380 Lumens

Warm White (3000K), 90 CRI

100-277VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV),

Standard (TRIAC) Incandescent

(at 120VAC only), or 0-10V

**WET LOCATION (vertical mounting only)**  
**ADA**

**7252.72-WL** Textured Bronze

**7252.74-WL** Textured Gray

**7252.98-WL** Textured White

## radiance

A wash of radiant LED illumination is directed to one side of an architectural linear form, revealing the texture of its panel and the surface beyond.






## light frames

Framed LED radiance is internally directed and reflected to illuminate indoor or outdoor surfaces. Light is projected downward or up and down to halo the bold yet thin profile.



7200.72-WL

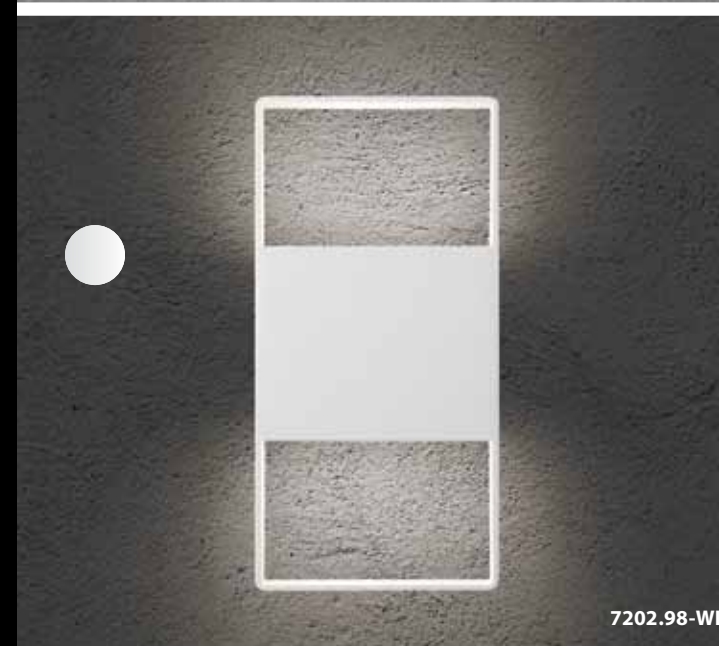

7202.98-WL



7204.74-WL

### 7200

#### Light Frames Downlight LED Sconce

13" H x 7" W  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 4 1/2" x 6 1/2"  
LED: 14w, 1820 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7200.72-WL** Textured Bronze  
**7200.74-WL** Textured Gray  
**7200.98-WL** Textured White

### 7202

#### Light Frames 14" Up/Down LED Sconce

14" H x 7" W  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 4 1/2" x 6 1/2"  
LED: 21w, 2570 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7202.72-WL** Textured Bronze  
**7202.74-WL** Textured Gray  
**7202.98-WL** Textured White

### 7204

#### Light Frames 21" Up/Down LED Sconce

21" H x 7" W  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 4 1/2" x 6 1/2"  
LED: 29w, 3710 Lumens  
Warm White (3000K), 90 CRI  
100-277VAC Input w/LED Driver  
Dimmable by Electronic Low Voltage (ELV),  
Standard (TRIAC) Incandescent (at 120VAC only),  
or 0-10V  
**WET LOCATION, ADA**

**7204.72-WL** Textured Bronze  
**7204.74-WL** Textured Gray  
**7204.98-WL** Textured White



7228.72-WL



7226.72-WL



7228.74-WL

## crest

LED illumination from a crescent downlight evokes a lunar glow.

### 7228

#### Crest LED Sconce

4 3/4" H x 9 3/4" W  
Shade: Die-Cast Aluminum  
w/Frosted Optical Acrylic  
Extension: 2"  
Wall Plate: 4 3/4" x 9 3/4"  
LED: 12w, 610 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7228.72-WL** Textured Bronze  
**7228.74-WL** Textured Gray  
**7228.98-WL** Textured White



7226.74-WL

### 7226

#### Cusp LED Sconce

5 1/4" H x 9 3/4" W  
Shade: Die-Cast Aluminum  
w/Frosted Optical Acrylic  
Extension: 5"  
Wall Plate: 5 1/4" x 9 3/4"  
LED: 14w, 1010 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION**

**7226.72-WL** Textured Bronze  
**7226.74-WL** Textured Gray  
**7226.98-WL** Textured White

## cusp


LED illumination projects  
from the bottom and inner  
faces of a mounted crescent  
to illuminate its textured  
panel and the area below.






# ridgeline

Two edges sweep upward to form a sculpted ridge projecting LED illumination from its sheer end face.  
This versatile architectural piece can direct light upward or downward in indoor or outdoor applications.

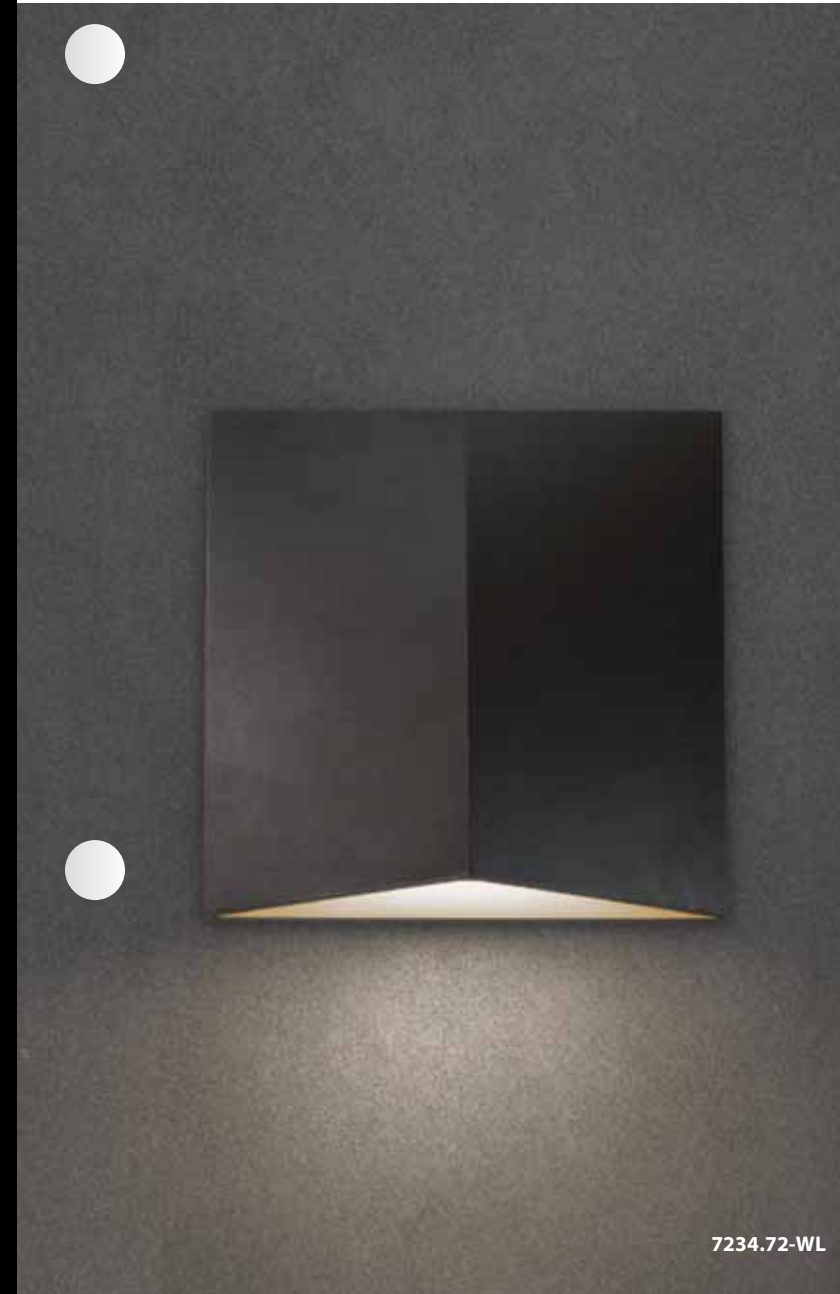

7234.72-WL

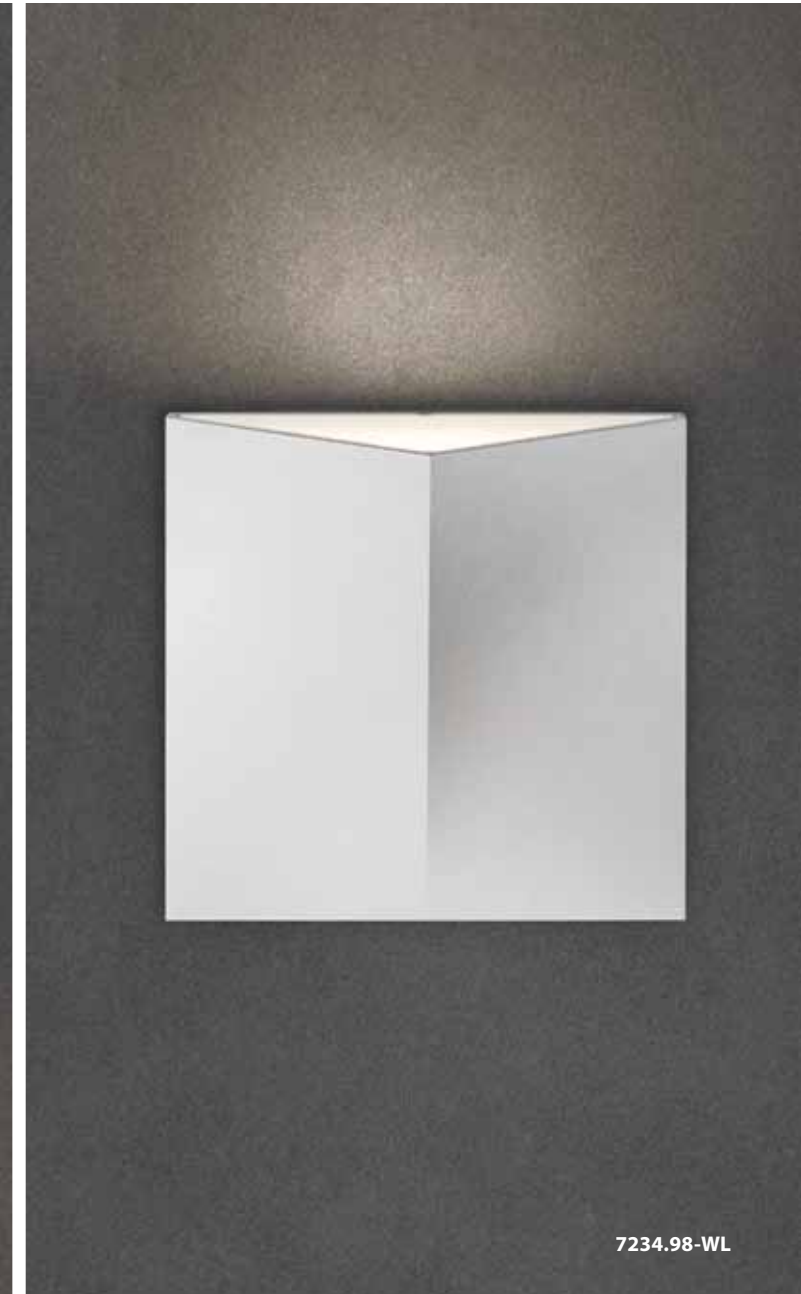

7234.98-WL

## 7234

### Ridgeline LED Sconce

7 1/2" sq  
Shade: Die-Cast Aluminum  
Extension: 3 1/4"  
Wall Plate: 7 1/2" sq  
LED: 16w, 1260 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7234.72-WL** Textured Bronze  
**7234.74-WL** Textured Gray  
**7234.98-WL** Textured White





2714.98-WL

## prism

Perpendicular edges and faces form a prism that directs LED illumination from its open face.



2714.72-WL



2716.98-WL

## 2714

### Prism LED Sconce

8" H x 8" W

Shade: Die-Cast Aluminum

Extension: 3"

Wall Plate: 8" sq

LED: 18w, 1000 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/12VAC Transformer

in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

**WET LOCATION (downlight only), ADA**

**2714.72-WL** Textured Bronze

**2714.74-WL** Textured Gray

**2714.98-WL** Textured White

## 2716

### Chamfer LED Sconce

11" H x 5" W

Shade: Aluminum

Extension: 2 3/4"

Wall Plate: 4 1/2" sq

LED: 20w, 1400 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**WET LOCATION, ADA**

**2716.72-WL** Textured Bronze

**2716.74-WL** Textured Gray

**2716.98-WL** Textured White

## chamfer

A crisp rectangular tube is cut on each end at an extreme angle to reveal an interior surface reflector that radiates LED illumination vertically in two directions.

# angled plane

Impossible to improve on geometry, Angled Plane downlight reflects downward LED illumination for outdoor applications, and can also be used as an uplight for indoor use.



2363.72-WL

## 2361

### Angled Plane Narrow Downlight LED Sconce

7 3/4" H x 4" W  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 5 1/4" x 2 1/2"  
LED: 10w, 420 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
Dimmable by Electronic Low Voltage (ELV)  
**WET LOCATION (downlight only), ADA**

**2361.72-WL** Textured Bronze  
**2361.74-WL** Textured Gray  
**2361.98-WL** Textured White

2361.74-WL

## 2363

### Angled Plane Downlight LED Sconce


7 3/4" H x 7" W  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 5 1/4" x 5 1/2"  
LED: 13w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
Dimmable by Electronic Low Voltage (ELV)  
**WET LOCATION (downlight only), ADA**

**2363.72-WL** Textured Bronze  
**2363.74-WL** Textured Gray  
**2363.98-WL** Textured White

2363.98-WL



2365.98



2366.98

We continue to offer our original versions of Angled Plane with up and down lighting for interior locations.






7230.72-WL



7232.74-WL

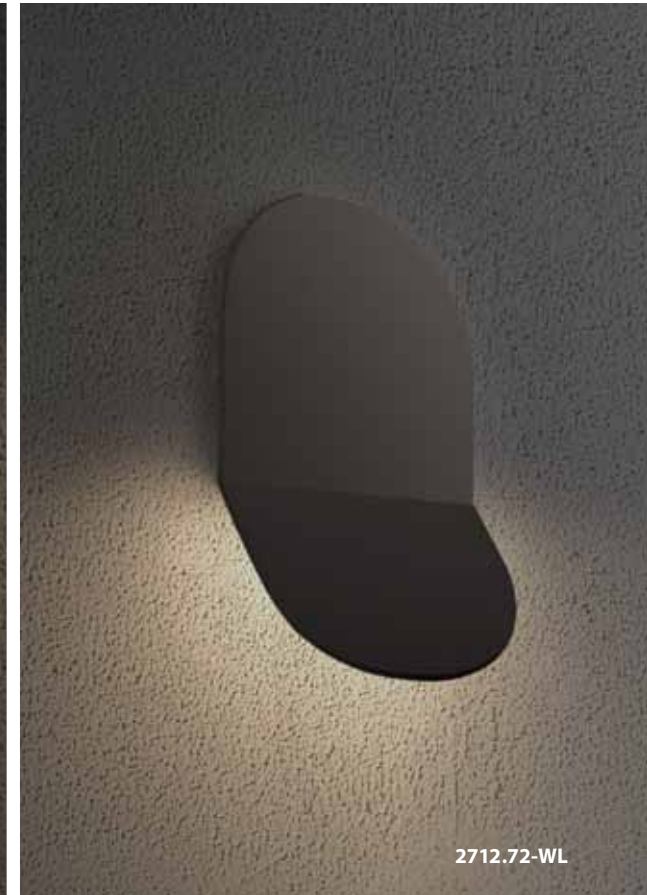

2712.72-WL



7230.74-WL

## ply

A solid aluminum shade drapes softly over an optical acrylic diffuser that directs LED illumination down and to the sides of these elegantly simple outdoor shapes.

### 7230

#### Ply LED Sconce

11" H x 7" W  
Shade: Aluminum w/Optical Acrylic  
Extension: 3"  
Wall Plate: 9 1/4" x 6"  
LED: 16w, 1260 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7230.72-WL** Textured Bronze  
**7230.74-WL** Textured Gray  
**7230.98-WL** Textured White

### 7232

#### Cape LED Sconce

8" H x 7" W  
Shade: Aluminum w/Optical Acrylic  
Extension: 2 3/4"  
Wall Plate: 6 3/4" x 6"  
LED: 16w, 1260 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7232.72-WL** Textured Bronze  
**7232.74-WL** Textured Gray  
**7232.98-WL** Textured White



7232.72-WL

## cape

### 2712

#### Tab LED Sconce

9" H x 5 1/2" W  
Shade: Die-Cast Aluminum  
Extension: 4"  
Wall Plate: 5" x 4 1/2"  
LED: 15w, 1260 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**2712.72-WL** Textured Bronze  
**2712.74-WL** Textured Gray  
**2712.98-WL** Textured White



2712.74-WL

## tab





7236.72-WL

## tides LOW

7236

Tides Low LED Sconce

4 1/2" h x 8" w

Shade: Die-Cast Aluminum

Extension: 2 1/2"

Wall Plate: 4 1/2" x 8"

LED: 20w, 1900 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent


**WET LOCATION (downlight only), ADA**

**7236.72-WL** Textured Bronze

**7236.74-WL** Textured Gray

**7236.98-WL** Textured White

A flowing wave-like surface with a subtle softness is set against a crisp rectangular form to bathe the area below in LED illumination.

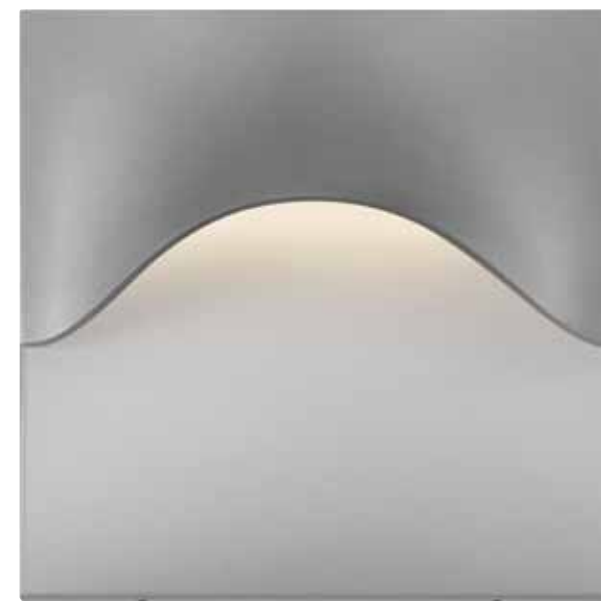

7237.74-WL

## tides HIGH

7237

Tides High LED Sconce

8" sq

Shade: Die-Cast Aluminum

Extension: 2 1/2"

Wall Plate: 8" sq

LED: 20w, 1900 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**WET LOCATION (downlight only), ADA**


**7237.72-WL** Textured Bronze

**7237.74-WL** Textured Gray


**7237.98-WL** Textured White



2711.72-WL

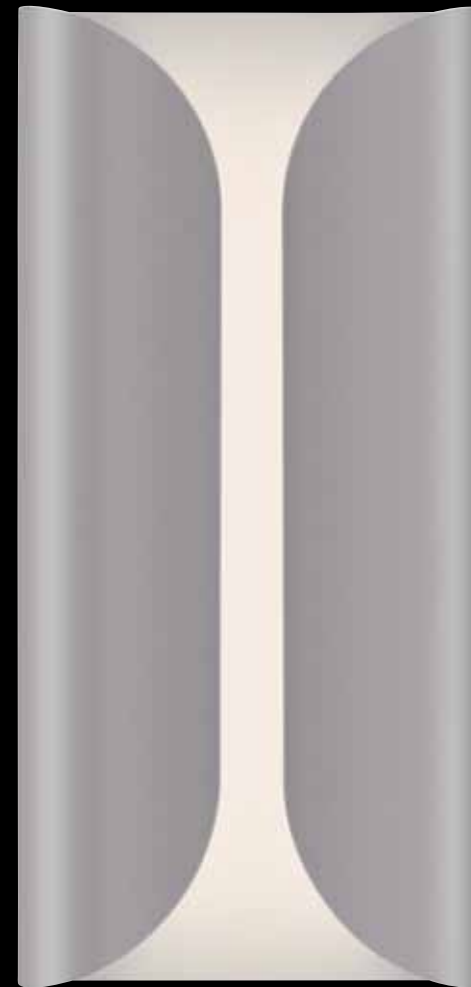

2711.74-WL

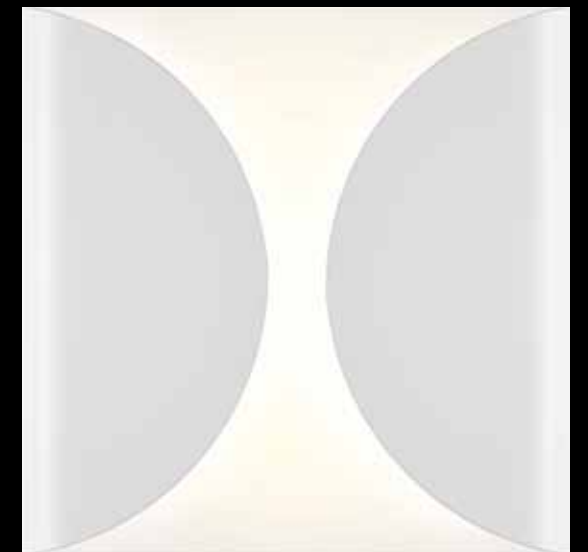

2710.98-WL

## folds

Rounded ends of a planar surface are folded to form a simple volume of reflected LED illumination, scaled in two sizes and designed for indoor or outdoor applications.



### 2711

#### Folds Tall LED Sconce

13 3/4" H x 6 1/2" W  
Shade: Aluminum  
Extension: 2"  
Wall Plate: 12 3/4" x 5"  
LED: 20w, 1300 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
**WET LOCATION, ADA**

**2711.72-WL** Textured Bronze  
**2711.74-WL** Textured Gray  
**2711.98-WL** Textured White

### 2710

#### Folds LED Sconce

8" sq  
Shade: Aluminum  
Extension: 2 1/4"  
Wall Plate: 6 1/2" sq  
LED: 15w, 840 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/12VAC Transformer  
in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
**WET LOCATION, ADA**

**2710.72-WL** Textured Bronze  
**2710.74-WL** Textured Gray  
**2710.98-WL** Textured White





## shear

Solid die-cast forms in subtle sensuous shapes punctuate LED illumination with precision, in perfect architectural harmony.

### 7222

#### Shear Small Sconce

4 ¾" H x 3 ½" W  
Shade: Die-Cast Aluminum  
Extension: 3"  
Wall Plate: 4 ¾" x 3 ½"  
Bulb: (1) LED MR16, GU10 Base  
**WET LOCATION, ADA**

**7222.72-WL** Textured Bronze  
**7222.74-WL** Textured Gray  
**7222.98-WL** Textured White

### 7223

#### Shear Large Sconce

6 ¼" H x 5" W  
Shade: Die-Cast Aluminum  
Extension: 4"  
Wall Plate: 6 ¼" x 5"  
Bulb: (1) LED PAR20, Medium Base  
**WET LOCATION, ADA**

**7223.72-WL** Textured Bronze  
**7223.74-WL** Textured Gray  
**7223.98-WL** Textured White

## elips

### 7220

#### Elips LED Sconce

5 ¼" H x 6 ¼" W  
Shade: Die-Cast Aluminum w/Frosted Optical Acrylic  
Extension: 3 ½"  
Wall Plate: 4 ½" DIA  
LED: 10w, 1500 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7220.72-WL** Textured Bronze  
**7220.74-WL** Textured Gray  
**7220.98-WL** Textured White

### 7238

#### Drift Single LED Sconce

4 ¾" H x 6" W  
Shade: Die-Cast Aluminum  
Extension: 2 ¾"  
Wall Plate: 4 ¾" x 6"  
LED: 13w, 1150 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

*Provides either up or down light.*

**7238.72-WL** Textured Bronze  
**7238.74-WL** Textured Gray  
**7238.98-WL** Textured White

## drift

### 7239

#### Drift Dual LED Sconce

4 ¾" H x 6" W  
Shade: Die-Cast Aluminum  
Extension: 2 ¾"  
Wall Plate: 4 ¾" x 6"  
LED: 17w, 1650 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver  
Dimmable by Electronic Low Voltage (ELV) or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

*Provides both up and down light.*

**7239.72-WL** Textured Bronze  
**7239.74-WL** Textured Gray  
**7239.98-WL** Textured White





7210.72-WL

## CRCL

Downward LED illumination is cleanly integrated into the edge of a circular disk.



7210.74-WL



7214.74-WL



7214.98-WL

## SQR

Radiant LED light is incorporated within a square geometric fixture.

### 7210

#### CRCL LED Sconce

6" DIA

Shade: Die-Cast Aluminum

w/Frosted Optical Acrylic

Extension: 1 1/2"

Wall Plate: 5" DIA

LED: 10w, 1300 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**WET LOCATION, ADA**

**7210.72-WL** Textured Bronze

**7210.74-WL** Textured Gray

**7210.98-WL** Textured White

### 7214

#### SQR LED Sconce

7" sq

Shade: Aluminum w/Optical Acrylic

Extension: 2"

Wall Plate: 6 1/2" sq

LED: 15w, 1680 Lumens

Warm White (3000K), 90 CRI

120VAC Input w/LED Driver in Outlet Box

Dimmable by Electronic Low Voltage (ELV)

or Standard (TRIAC) Incandescent

**WET LOCATION, ADA**

**7214.72-WL** Textured Bronze

**7214.74-WL** Textured Gray

**7214.98-WL** Textured White





# aku

A Zen-like arc cuts across a luminous rectilinear volume, casting LED illumination in vertical or horizontal orientations.

## 7216

**Aku LED Sconce**

7" sq  
Shade: Aluminum w/Optical Acrylic  
Extension: 2"  
Wall Plate: 6 1/2" sq  
LED: 15w, 1720 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7216.72-WL** Textured Bronze  
**7216.74-WL** Textured Gray  
**7216.98-WL** Textured White



7216.72-WL



7218.72-WL

# nami

## 7218

**Nami LED Sconce**

14 1/4" h x 7" w  
Shade: Aluminum w/Optical Acrylic  
Extension: 2"  
Wall Plate: 13 3/4" x 6 3/4"  
LED: 21w, 2680 Lumens  
Warm White (3000K), 90 CRI  
120VAC Input w/LED Driver in Outlet Box  
Dimmable by Electronic Low Voltage (ELV)  
or Standard (TRIAC) Incandescent  
**WET LOCATION, ADA**

**7218.72-WL** Textured Bronze  
**7218.74-WL** Textured Gray  
**7218.98-WL** Textured White



7218.74-WL

INDEX: By Item Number

1715	34	2574	44	2933	12	7202	63
1716	34	2575	44	2934	12	7204	63
1717	34	2576	43	2935	12	7210	80
1740	37	2577	41	2936	13	7214	81
1742	37	2583	21	2937	13	7216	82
1754	39	2710	77	2938	13	7218	83
2361	71	2711	77	2939	13	7220	79
2363	71	2712	73	2940	8	7222	78
2375	33	2714	68	2941	8	7223	78
2490	49	2716	69	2942	8	7226	65
2491	51	2724	58	2943	8	7228	64
2492	50	2725	58	2944	8	7230	72
2493	51	2769	27	2945	8	7232	72
2495	47	2770	27	2946	9	7234	67
2557	53	2771	27	2947	9	7236	74
2558	53	2772	27	2948	9	7237	75
2559	53	2773	25	2949	9	7238	79
2560	52	2774	24	2950	16	7239	79
2561	52	2775	23	2951	16	7240	59
2562	52	2780	31	2952	16	7243	57
2565	54	2782	31	2953	16	7245	57
2566	54	2790	28	2954	16	7250	61
2567	55	2791	28	2955	16	7252	61
2568	55	2792	29	2956	17	7254	60
2569	55	2794	29	2957	17	7256	60
2570	42	2930	12	2958	17		
2572	44	2931	12	2959	17		
2573	44	2932	12	7200	63		

INDEX: By Item Family

<b>A</b>		<b>G</b>		<b>R</b>	
aku	82	gestures	20	radiance	61
angled plane	70			rain	10
<b>B</b>		<b>H</b>		ridgeline	66
bauhaus revisited	46	haro	38		
bi-Y	24	<b>K</b>		<b>S</b>	
		kabu	36	shear	78
<b>C</b>				sideways	60
cape	73	<b>I</b>		spire	6
chamfer	69	l'arc	56	SQR	81
chroma	32	light frames	62	stix	26
CRCL	80			sword	59
crest	64	<b>M</b>		<b>T</b>	
cusp	65	midtown	58	tab	73
<b>D</b>		<b>N</b>		tao	30
dao	31	nami	83	tides	74
dazzle	52			trinity	14
drift	79	<b>P</b>		<b>Y</b>	
		panels	40	Y	25
<b>E</b>		ply	72		
elips	79	prism	68		
		profili	34		
<b>F</b>		<b>Q</b>			
folds	76	quad-Y	22		



INDEX: By Product Image




spire 06




rain 10




trinity 14




gestures 20




quad-Y 22




bi-Y 24




Y 25



stix 26




tao 30



dao 31



chroma 32



profili 34



kabu 36



haro 38




panels 40




bauhaus revisited 46




dazzle 52




l'arc 56




midtown 58




sword 59



sideways 60



radiance 61



light frames 62



crest 64




cusp 65




ridgeline 66



prism 68



chamfer 69



angled plane 70



ply 72




cape 73



tab 73

INDEX: By Product Image



tides 74



folds 76




shear 78



elips 79



drift 79



CRCL 80



SQR 81



aku 82



nami 83



See Suspenders™ 2016 book, under separate cover.

# ADDITIONS

# TWO | 2016



SONNEMAN – A WAY OF LIGHT  
PO Box 10725 Newburgh New York 12552  
P. 845.926.5469 F. 845.565.8930

e-mail: [csr@sonnemanawayoflight.com](mailto:csr@sonnemanawayoflight.com)  
[www.sonnemanawayoflight.com](http://www.sonnemanawayoflight.com)



Copyright ©2016 SONNEMAN – A WAY OF LIGHT

# SONNEMAN®

A WAY OF LIGHT