

The Elpha outdoor wall sconce features artfully sturdy lines in a contemporary geometric design. A powerful integrated LED light source shines smoothly down the open triangular design providing ample yet appropriate amounts of light into any exterior space.

**Outstanding protection against the elements:**

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing


**SPECIFICATIONS**

DELIVERED LUMENS	366.7
WATTS	11.5
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
OPTICS	300
MOUNTING OPTIONS	Wall
CCT	3000K
CRI	90
COLOR BINNING	3-Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL, ADA
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 hours
WARRANTY*	5 years
WEIGHT	4 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




ELPHA 14 shown in bronze

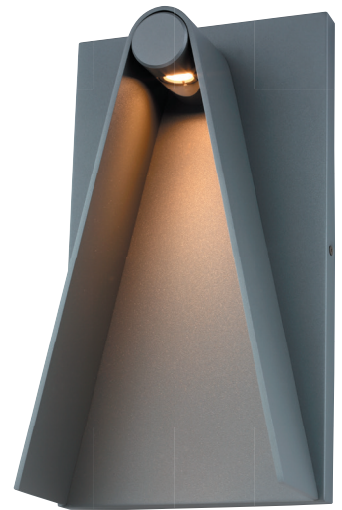

ELPHA 14 shown in charcoal

**ORDERING INFORMATION**

7000WEPA	SIZE	FINISH	LAMP
14	14"	Z BRONZE	LED930 LED 90CRI, 3000K, 120V
		H CHARCOAL	LED930-277 LED 90CRI, 3000K, 277V

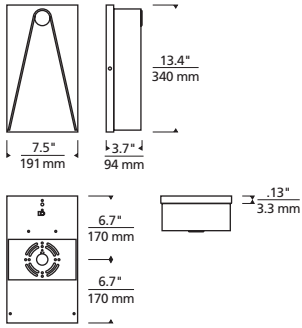


Elpha 14

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ELPHA 14

Total Lumen Output: 366.7  
 Total Power: 11.5  
 Luminaire Efficacy: 32  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: BO-U1-G0

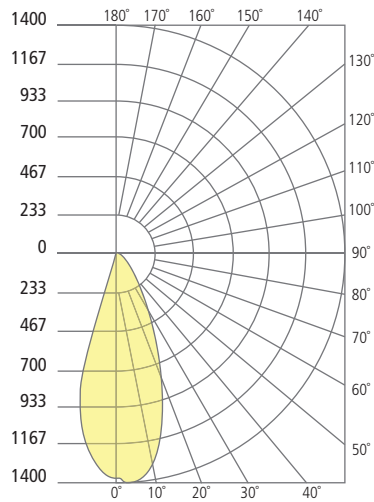

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

VISUAL COMFORT & Co.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500