

The Mode Single outdoor LED flood/accent light features a minimalist tubular profile with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Single allows precise illumination when either ceiling or wall mounted.

Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

SPECIFICATIONS

DELIVERED LUMENS	20°: 651.8, 30°: 710.7, 40°: 779, 60°: 724
WATTS	8.6
VOLTAGE	Universal 120V - 277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Wall or Ceiling
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years
WEIGHT	2.6 lbs.

* Visit techlighting.com for specific warranty limitations and details.




MODE
shown in charcoal



MODE
shown in bronze

ORDERING INFORMATION

7000WMD5	CRI	COLOR TEMPERATURE	LENGTH (A)	BEAM SPREAD	FINISH	INPUT VOLTAGE
	9 90 CRI	27 2700K	9 9"	20 20°	Z BRONZE	UNV UNIVERSAL 120-277V
		30 3000K	13 13"	30 30°	H CHARCOAL	
		35 3500K	19 19"	40 40°		
		40 4000K	25 25" (CEILING ONLY)	60 60°		

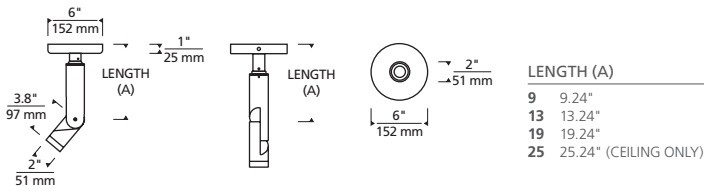

Mode Single Wall/Ceiling

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

MODE 20° SINGLE

Total Lumen Output: 651.8
 Total Power: 8.6
 Luminaire Efficacy: 76
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U0-G0

MODE 30° SINGLE





Total Lumen Output: 710.7
 Total Power: 8.6
 Luminaire Efficacy: 83
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U0-G0

MODE 40° SINGLE

Total Lumen Output: 779
 Total Power: 8.6
 Luminaire Efficacy: 90
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U0-G0

MODE 60° SINGLE

Total Lumen Output: 724
 Total Power: 8.6
 Luminaire Efficacy: 84
 Color Temp: 3000K
 CRI: 90+
 BUG Rating: B1-U0-G0

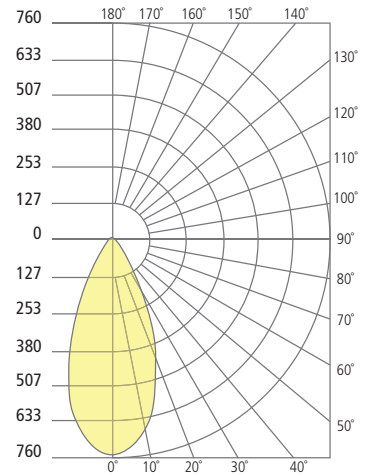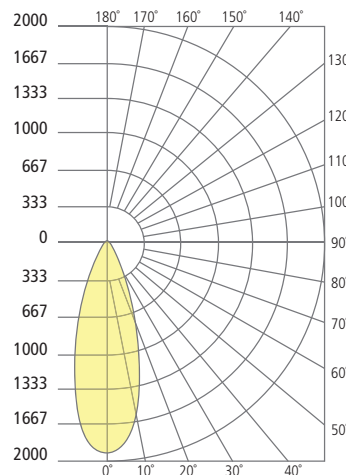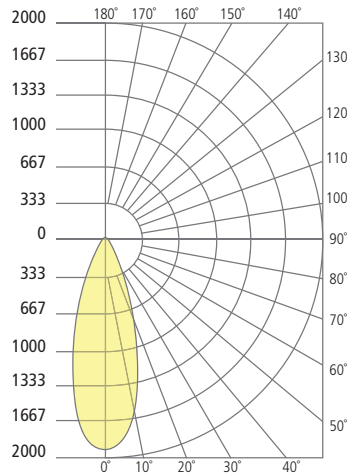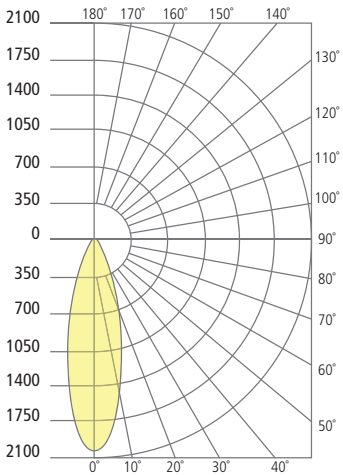

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.