

The Mode Single outdoor LED flood/accent light features a minimalist tubular profile with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Single allows accent and way-finding options in a stake- or bolt-mounted path fixture.

Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

SPECIFICATIONS

DELIVERED LUMENS	20°: 651.8, 30°: 710.7, 40°: 779, 60°: 724
WATTS	8.6
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years
WEIGHT	2.6 lbs.



MODE
shown in bronze



MODE
shown in charcoal

12V AC TRANSFORMERS*

(OUTDOOR RATED, ORDERED SEPARATELY)






ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

7000AMDES	CRI	COLOR TEMPERATURE	LENGTH (A)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	9 9"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	13 13"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	19 19"	40 40°			
		40 4000K	25 25"	60 60°			

*REQUIRES 12V REMOTE TRANSFORMER

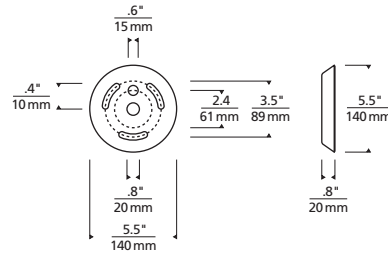

LENGTH (A)	
9	9.24"
13	13.24"
19	19.24"
25	25.24"

Mode Single Path/Flood

Anchor Plate Bolt Pattern

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

MODE 20° SINGLE

Total Lumen Output:	651.8
Total Power:	8.6
Luminaire Efficacy:	76
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

MODE 30° SINGLE





Total Lumen Output:	710.7
Total Power:	8.6
Luminaire Efficacy:	83
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

MODE 40° SINGLE

Total Lumen Output:	779
Total Power:	8.6
Luminaire Efficacy:	90
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

MODE 60° SINGLE

Total Lumen Output:	724
Total Power:	8.6
Luminaire Efficacy:	84
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-U0

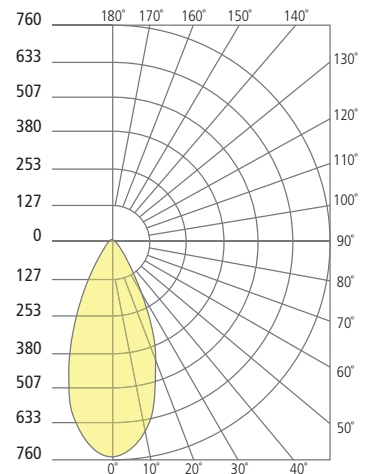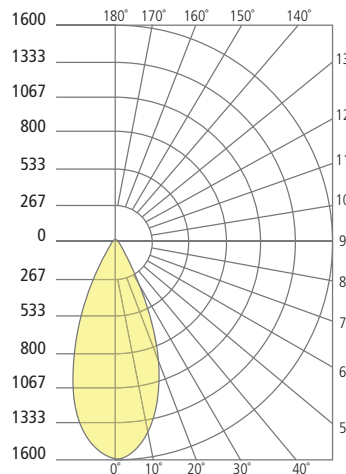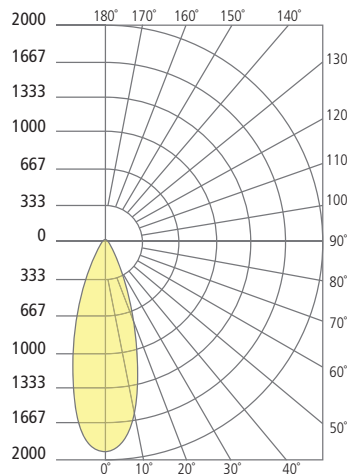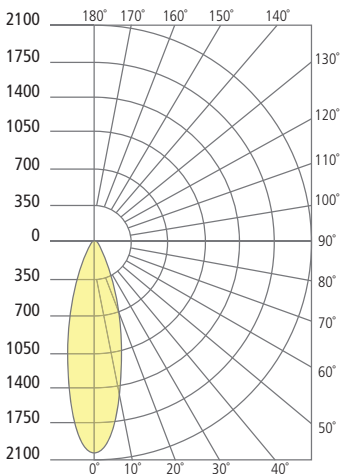

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.