

The Mode Split outdoor LED path light features a minimalist tubular profile with a unique “split” design that features 2 semi-circular arms that can be aimed together or independently for maximum flexibility. Featuring 185° tilt adjustment and 359° rotation, Mode Split allows accent and way-finding options in a stake- or bolt-mounted path fixture.

### Mode features

- Two independent light sources
- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

### SPECIFICATIONS

DELIVERED LUMENS	20°: 1201, 30°: 1316, 40°: 1413, 60°: 1488
WATTS	16.2
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years
WEIGHT	4.5 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



MODE  
shown in bronze



MODE  
shown in charcoal

### 12V AC TRANSFORMERS\*


(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

### ORDERING INFORMATION

7000AMDED	CRI	COLOR TEMPERATURE	LENGTH (A)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	10 10"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	14 14"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	20 20"	40 40°			
		40 4000K	26 26"	60 60°			

\*REQUIRES 12V REMOTE TRANSFORMER

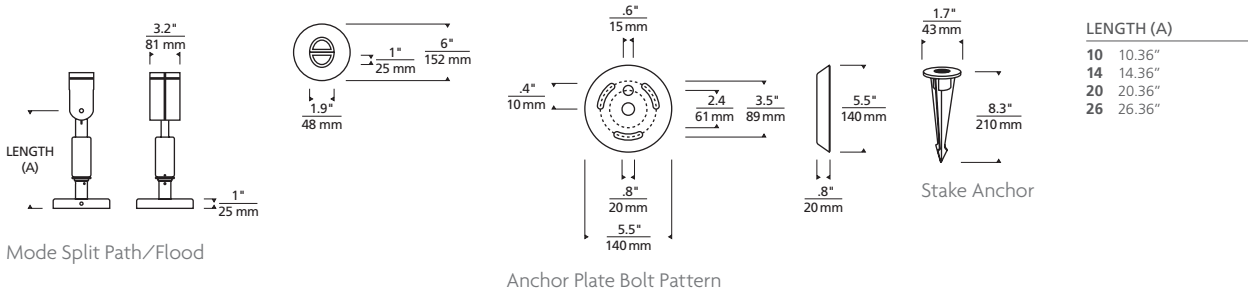

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### MODE 20° PATH

Total Lumen Output: 1201  
 Total Power: 16.2  
 Luminaire Efficacy: 62  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B1-U0-G0

### MODE 30° PATH





Total Lumen Output: 1316  
 Total Power: 16.2  
 Luminaire Efficacy: 67  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 40° PATH

Total Lumen Output: 1413  
 Total Power: 16.2  
 Luminaire Efficacy: 72  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U0-G0

### MODE 60° PATH

Total Lumen Output: 1488  
 Total Power: 16.2  
 Luminaire Efficacy: 76  
 Color Temp: 3000K  
 CRI: 90+  
 BUG Rating: B2-U1-G0

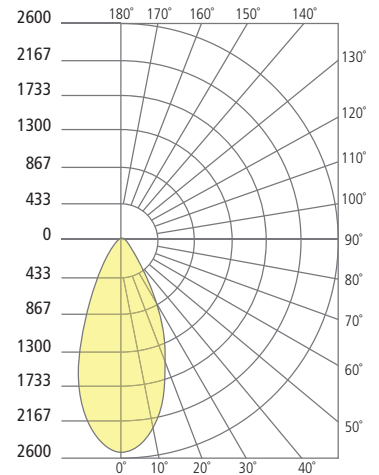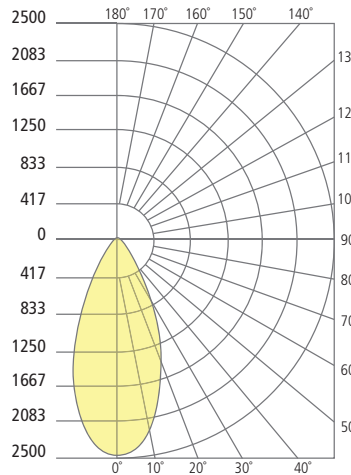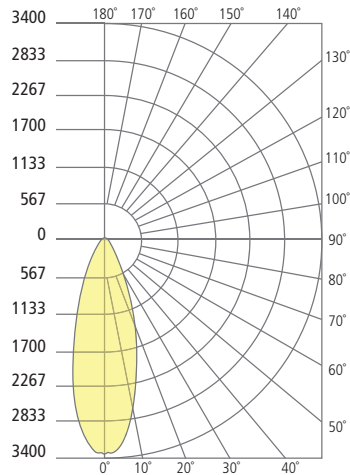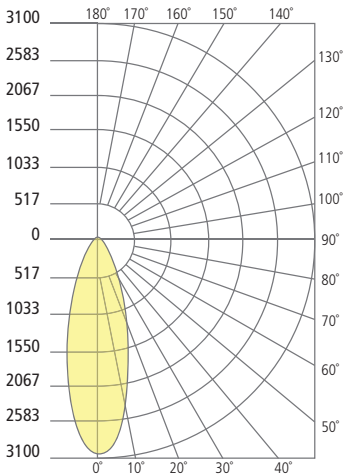

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---

