

# ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0118

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



Mounting Strap (A)



Mounting Screw (B)



Green Grounding Screw (C)



Hex Nut (D)




Wire Nut (E)



Nipple (F)




Canopy (G)



Coupling Kit (H)



Collar (I)

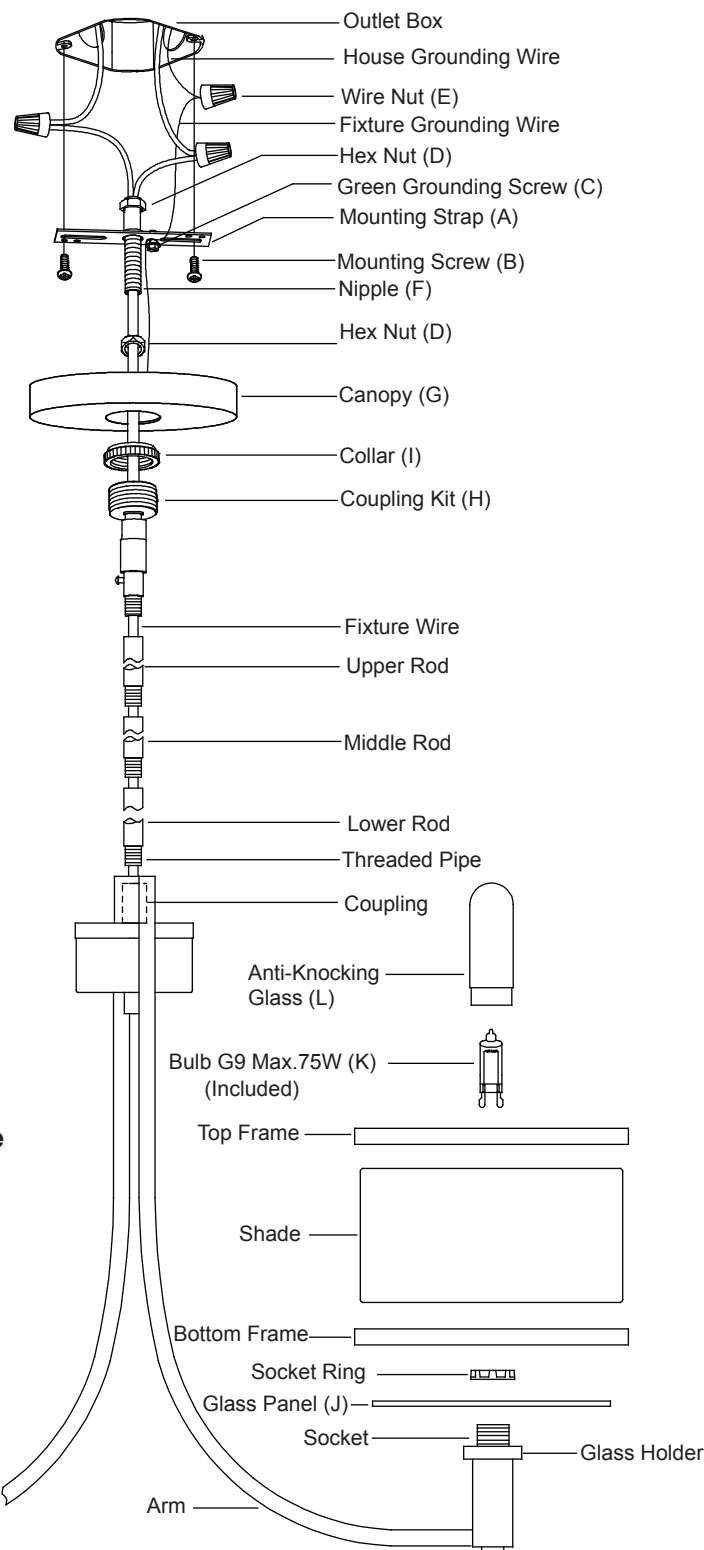

## Assembly Instructions:

Turn off the power at fuse or circuit box.

- Adjust the arms of the fixture.  
**The arms should be positioned with equal distances between them.**
- Rod Connections:
  - Thread the fixture wire from the fixture through the lower rod, then secure lower rod onto coupling using threaded pipe.
  - Thread the fixture wire through the middle rod, then secure middle rod onto lower rod using threaded pipe.
  - Thread the fixture wire through the upper rod, then secure upper rod onto middle rod using threaded pipe.  
**"NOTE: Length adjustable from 19-5/8" to 76-5/8". Use fewer rods if shorter length is desired.**
- Thread the fixture wire through the coupling kit, collar, canopy, then secure the rod assembly to the coupling kit.
- Thread the fixture wire through the nipple, hex nut and mounting strap. Install the hex nut onto one end of the nipple leaving about 3/8" (10mm) thread exposed. Install same end of nipple by screwing into coupling kit, secure nipple by tightening hex nut.
- Attach the nipple to the mounting strap, then secure it with hex nut.

6. Attach the mounting strap to outlet box by using two mounting screws.

7. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:

- Connect the black wire from the fixture to the hot wire (usually black insulation) from the power source.
- Connect the white wire from the fixture to the neutral wire (usually white insulation) from the power source.
- Attach the fixture grounding wire (usually bare wire) to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut. If your outlet box does not have a house grounding wire, then wrap the fixture grounding wire around the green grounding screw.

Carefully put the wires back into the outlet box.

8. Attach the canopy to the mounting strap: insert the coupling kit through hole, then secure by tightening collar.

9. Place the glass panel over the glass holder, making sure the socket feeds through the center hole of glass panel, then secure it with a socket ring. (See Fig. 1)

10. Install bulbs (included). See relamping label at socket area or packaging for maximum allowed wattage. (See Fig. 1)

**Warning:** The lamp is hot. Do not touch the bulb with fingers. It's extremely important to keep the bulb clean. Any dust or sweat may damage the bulb immediately. If accidentally touched or dirty, clean with fabric carefully.

11. Install the anti-knocking glass by screwing onto the socket.

12. Place the bottom frame onto the glass panel. (See Fig. 1)

13. place the shade onto the bottom frame. (See Fig. 1)




14. place the top frame onto the shade. (See Fig. 1)


15. Repeat others.

**16. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 2)**

Turn on the power at the main fuse or circuit breaker box.

The following parts are available for re-order if damaged or missing.

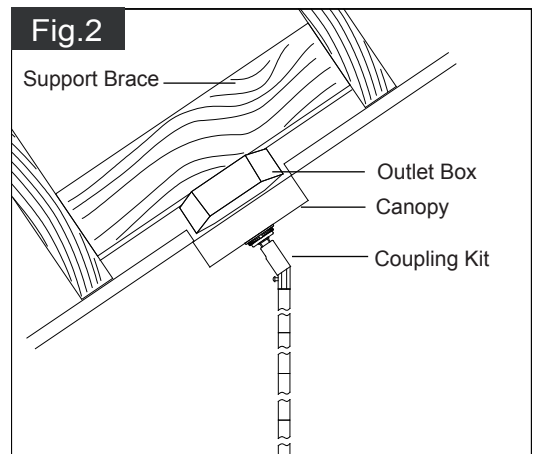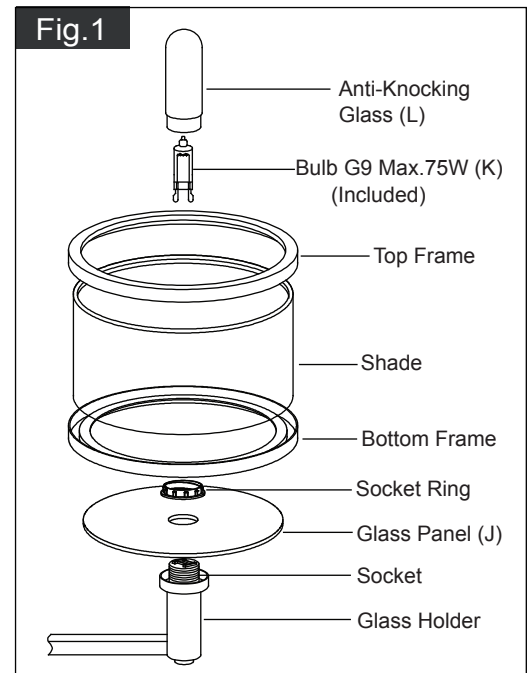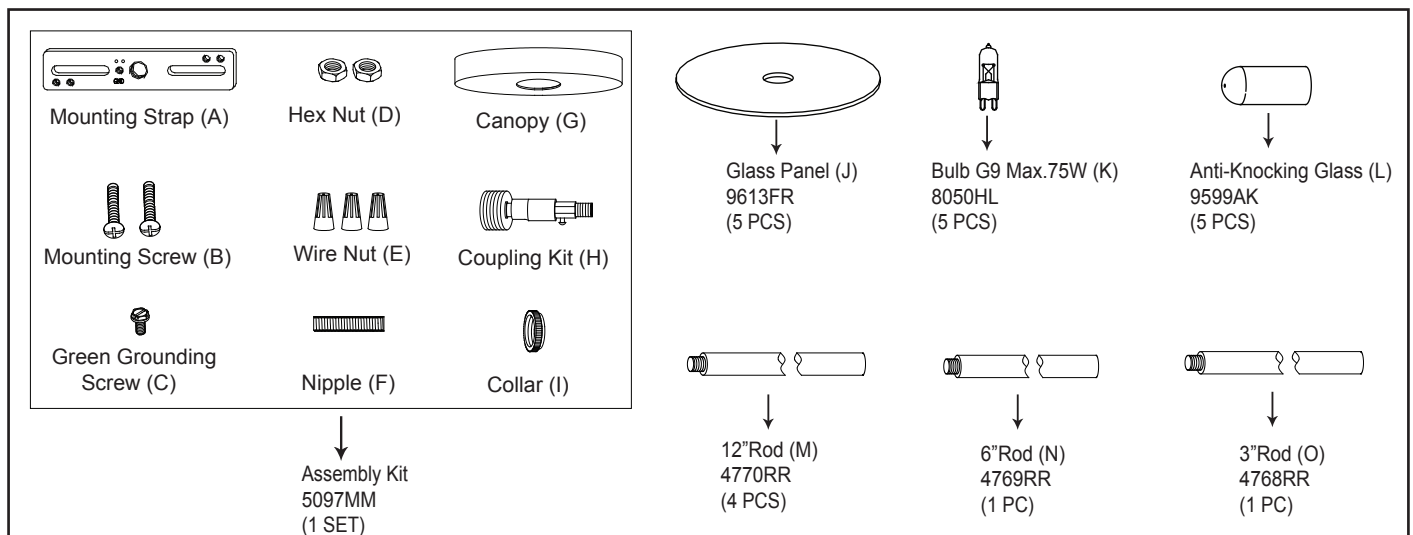

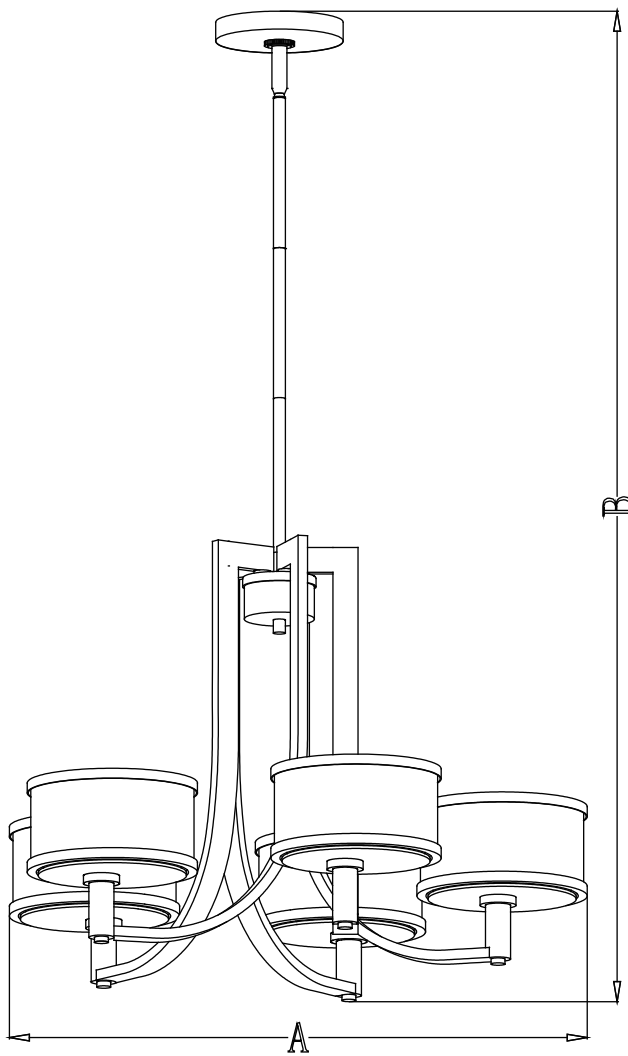

**A: 24-1/4"**

**B: 19-5/8"~76-5/8"**