

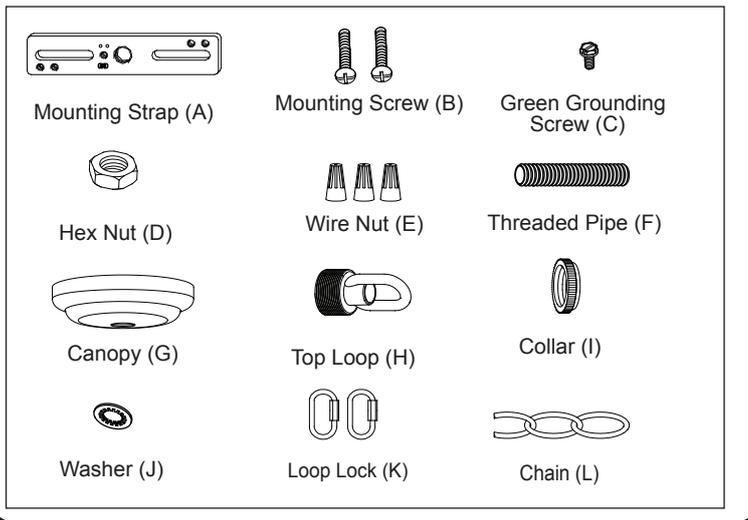
ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0127 / H0128

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):



Installation Steps

Turn off the power at fuse or circuit box.

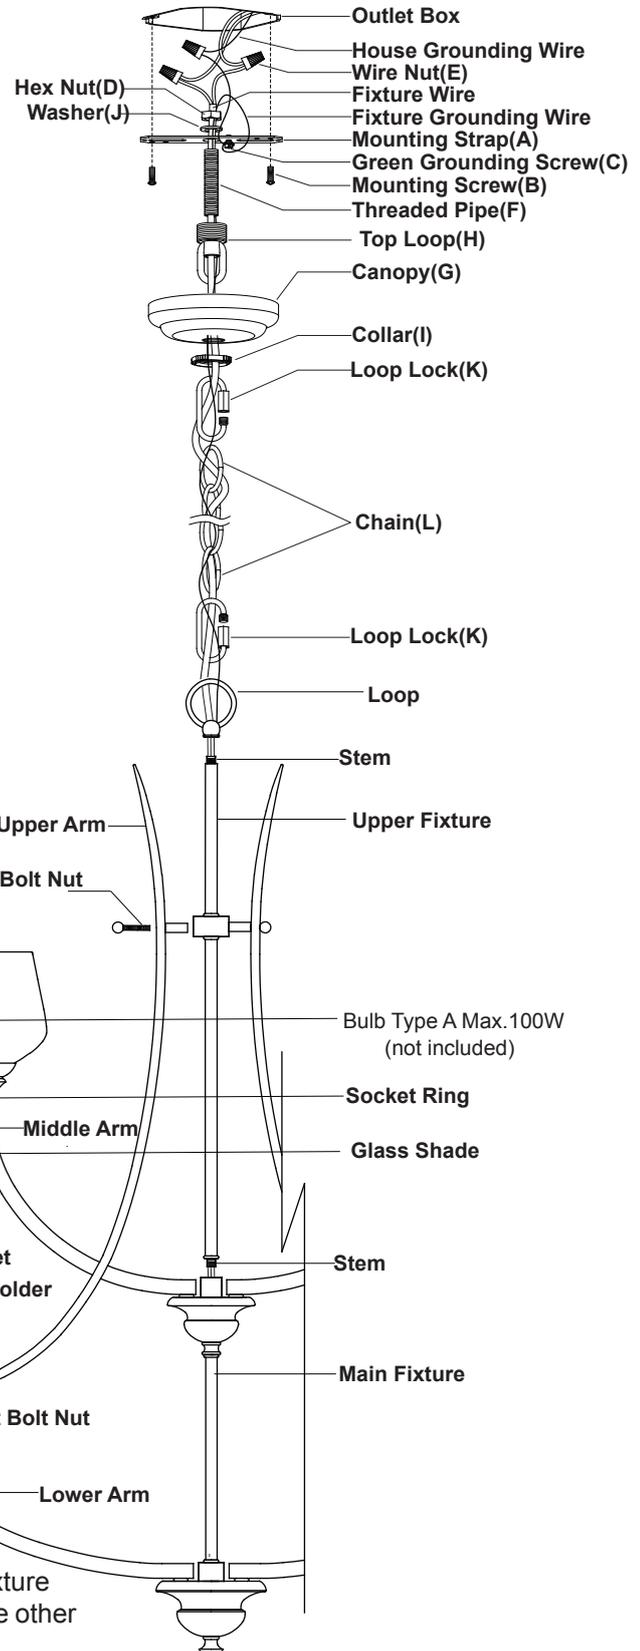
1. Attach the threaded pipe to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Secure the top loop to the threaded pipe.

4. Adjust the arms of the main fixture according to the drawing of the package.

Important:

- a. The arms of each tier (bottom, middle) should be positioned with equal distances between them.
- b. The arms should be fixed securely.

5. Secure the loop onto the stem of the upper fixture, thread fixture wires through threaded end of loop first.
6. Take an upper arm, attach its one end to lower arm, secure it with a short bolt nut. See illustration for correct position. (Don't reverse two ends of upper arm.)
7. Secure upper fixture to main fixture, make sure the hole of upper fixture aligns with the hole of upper arm by screwing loop. Then secure the other end of upper arm with a long bolt nut. Secure the other upper arms.






8. Connect the chain:
 - Determine length of chain needed to achieve desired fixture height. (To remove excess chain section, use pliers to bend link open.)
 - Weave the fixture wires and fixture grounding wire through the chain, collar and canopy.
9. Connect one end of the chain to the loop using a loop lock.
10. Connect the other end of the chain to top loop by using the other loop lock.
11. Thread the fixture wire and fixture grounding wire through the top loop, threaded pipe and mounting strap.
12. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
13. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
14. Attach the glass shades to the glass holders, then secure them with socket rings.
15. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.


Turn on the power at fuse or circuit box.

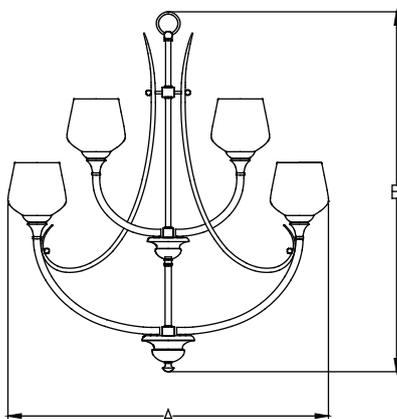
The following parts are available for re-order if damaged or missing.

Spare Parts List:

			
Mounting Strap (A)	Mounting Screw (B)	Green Grounding Screw (C)	Hex Nut (D)
			
Wire Nut (E)	Threaded Pipe (F)	Canopy (G)	Top Loop (H)
			
Collar (I)	Washer (J)	Loop Lock (K)	Chain (L)


 Mounting Hardware
 5241MM for H0127
 5242MM for H0128


 Glass Shade
 9684FO



A: 28-1/2"

B: 32-1/2"