


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0209

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

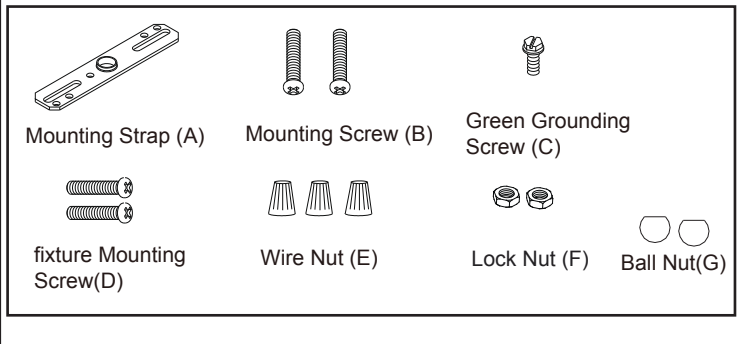

Installation Steps For Pendant


Turn off the power at fuse or circuit box

1. Thread two fixture mounting screws to the mounting strap, and then secure with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Rod Connections:
 - a. Thread the fixture wire from the fixture through the lower rod, and then secure the lower rod onto fixture using the threaded pipe.
 - b. Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
 - c. Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.
 - d. Thread the fixture wire through the fixture canopy, and then secure fixture canopy onto the upper rod using the threaded pipe.

Note: Length adjustable from 12" to 57".

Use fewer rods if shorter length is desired.

4. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
- Carefully put the wires back into the outlet box.

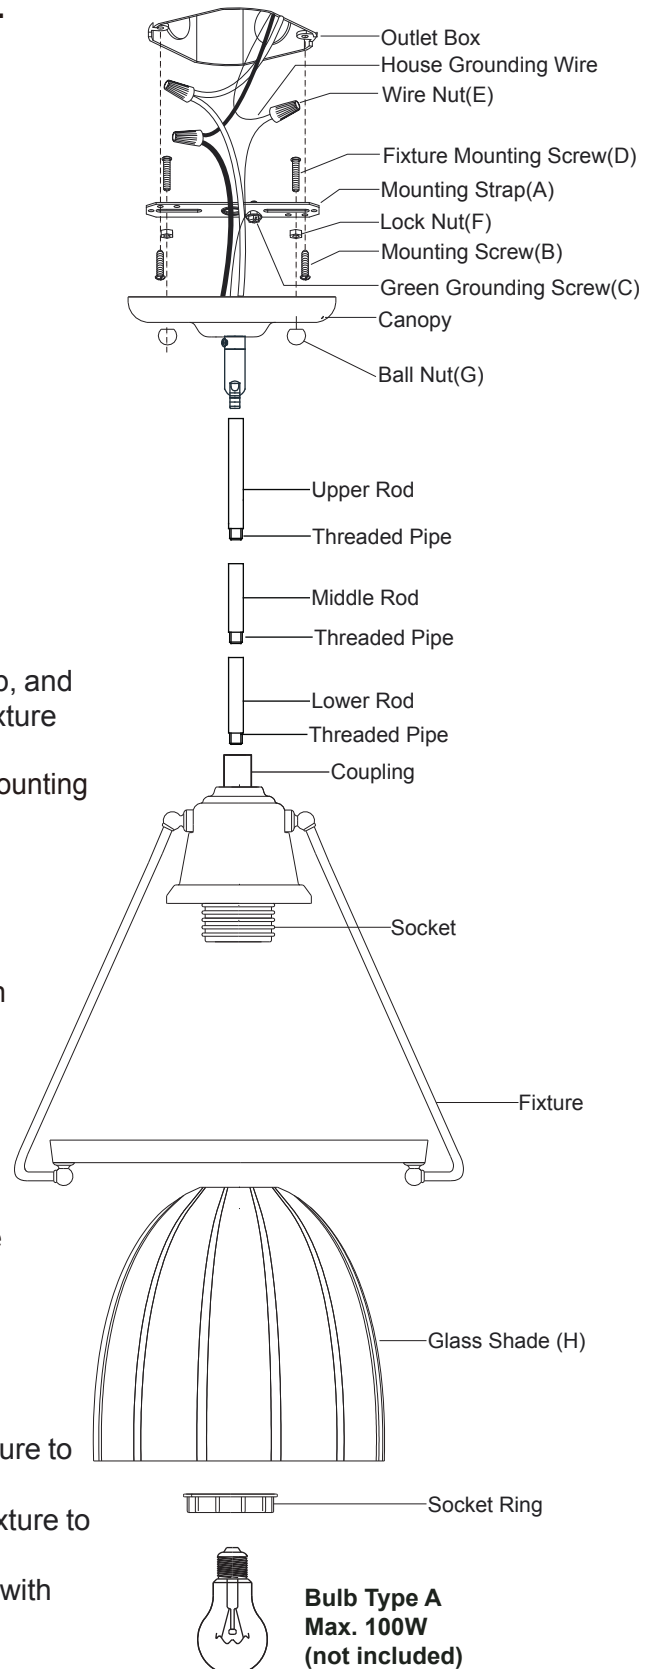


VAXCEL

161015

5. Attach the canopy to the mounting strap by inserting the fixture mounting screws, then secure it with two ball nuts.
6. Attach the glass shade onto the socket and tighten it with socket ring.
7. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage
8. Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)

Turn on the power at fuse or circuit box

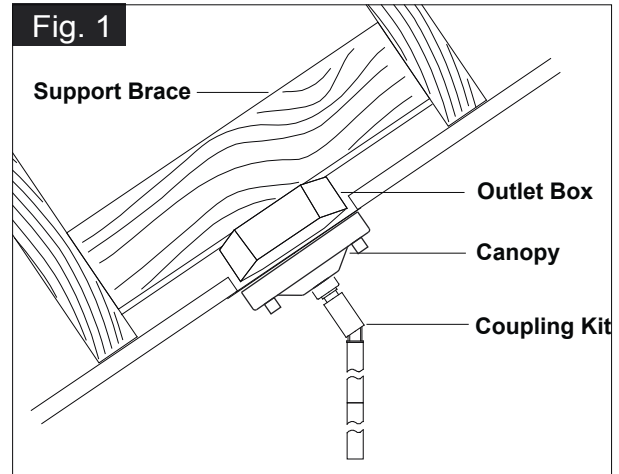


For Semi-Flush

Turn off the power at fuse or circuit box




1. Attach the glass shade onto the socket and tighten it with the socket ring.
2. Thread two fixture mounting screws to the mounting strap, and then secure with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
3. Attach the mounting strap to the outlet box by using two mounting screws.
4. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
 Carefully put the wires back into the outlet box.
5. Attach the canopy to the mounting strap by inserting the fixture mounting screws, then secure it with two ball nuts
6. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box


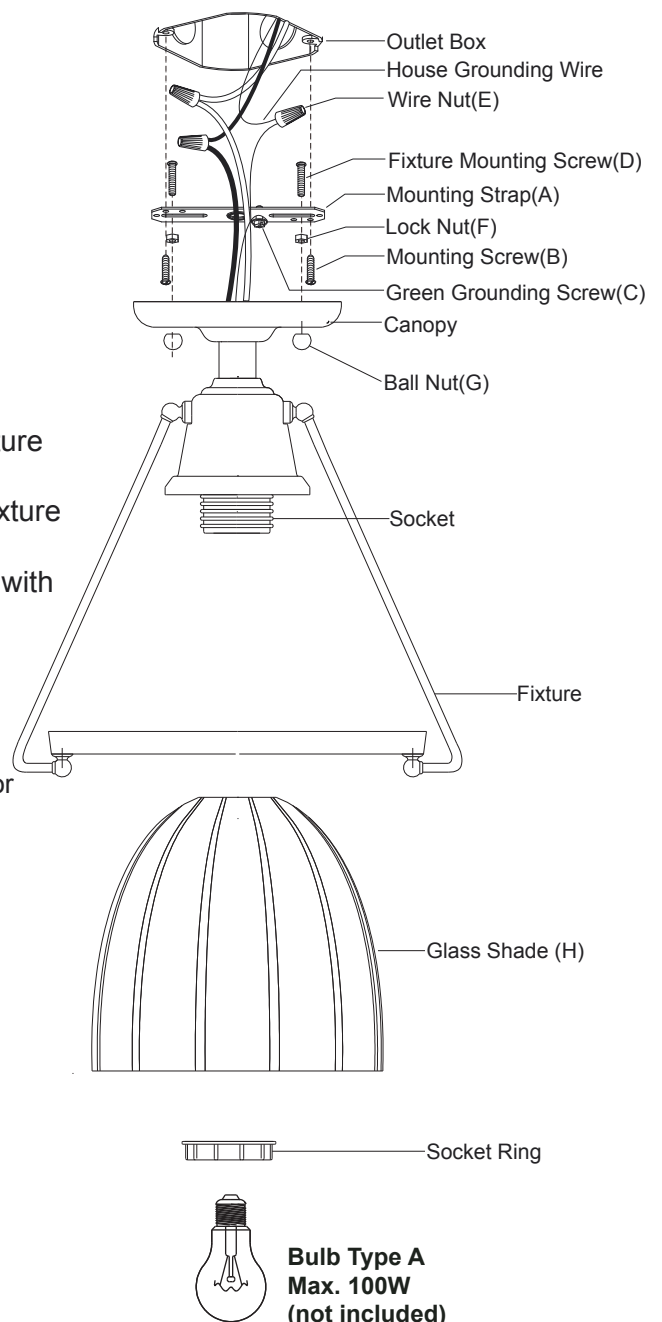


The following parts are available for re-order if damaged or missing.

Spare Parts List:

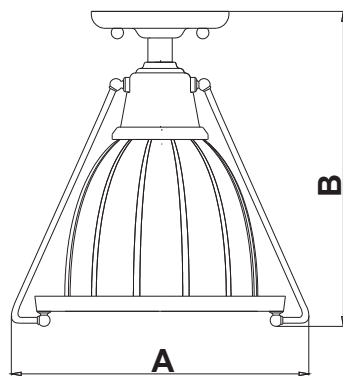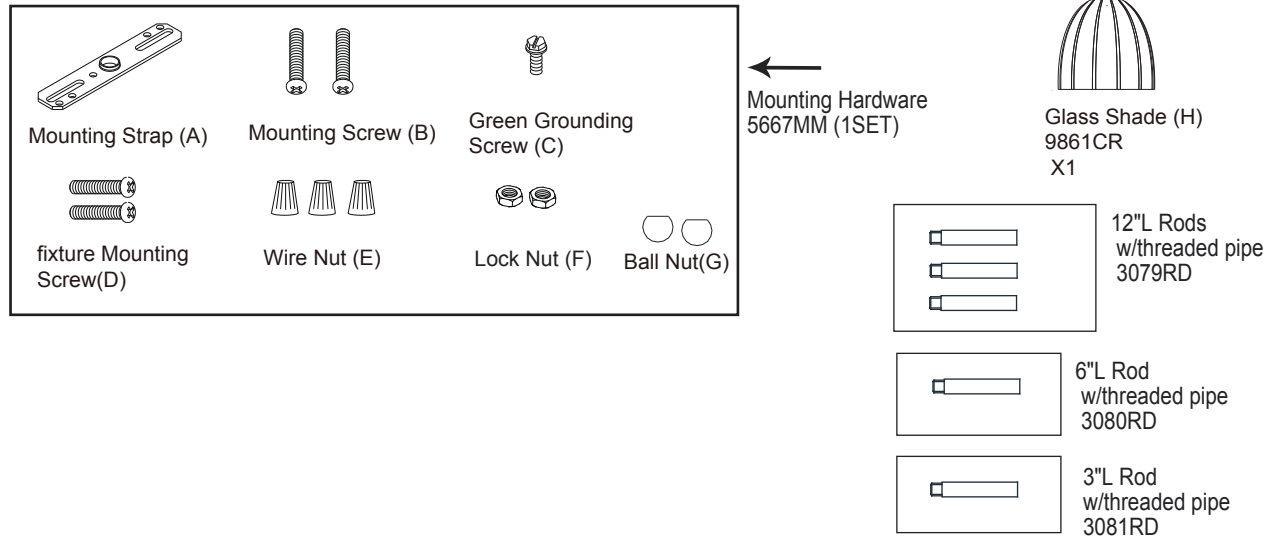

A:9-1/2"
B:12"

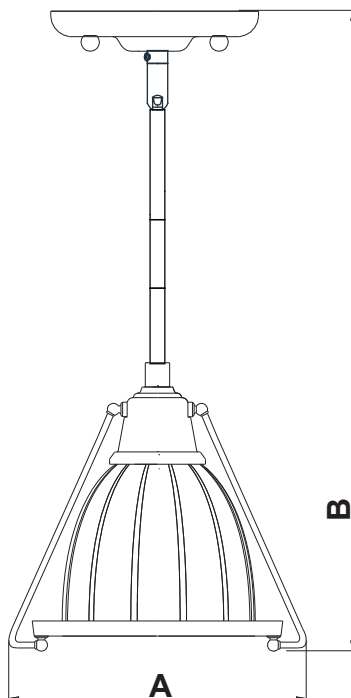

A:9-1/2"
B:57"