
## ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0248

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.



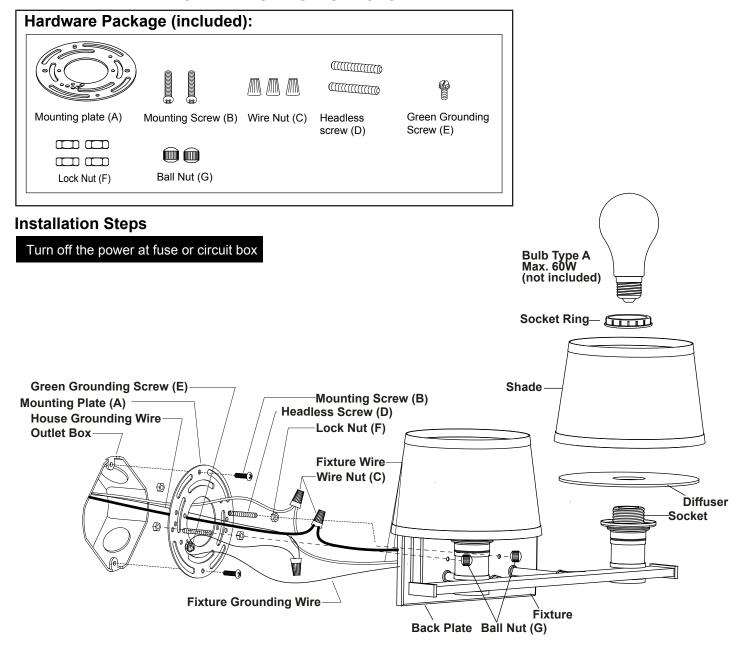

- 1.Thread two headless screws through the mounting plate, then secure them with four lock nuts (two on each side of the mounting plate). Adjust the length of the headless screws if necessary.
  - Note: Make sure that the headless screws are lined up horizontally, in order to ensure that the fixture will be level.
- 2. Attach the mounting plate to the outlet box by using two mounting screws.
- 3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - ---Connect the black wire from the fixture to the black wire from the power source.
  - ---Connect the white wire from the fixture to the white wire from the power source.
  - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.

Carefully put the wires back into the outlet box.

- 4. Attach the fixture to the mounting plate by inserting the headless screw, then secure it with the ball nuts.
- 5. Place the diffuser and the shade onto the socket, then tighten them with socket ring. Adjust the diffuser fully recessed onto the bottom circle of the shade if necessary.
- 6. Install the bulbs (not included). See relamping label on socket area or packaging for maximum allowed wattage.

## Turn on the power at fuse or circuit box

## The following parts are available for re-order if damaged or missing.

