



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0256

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

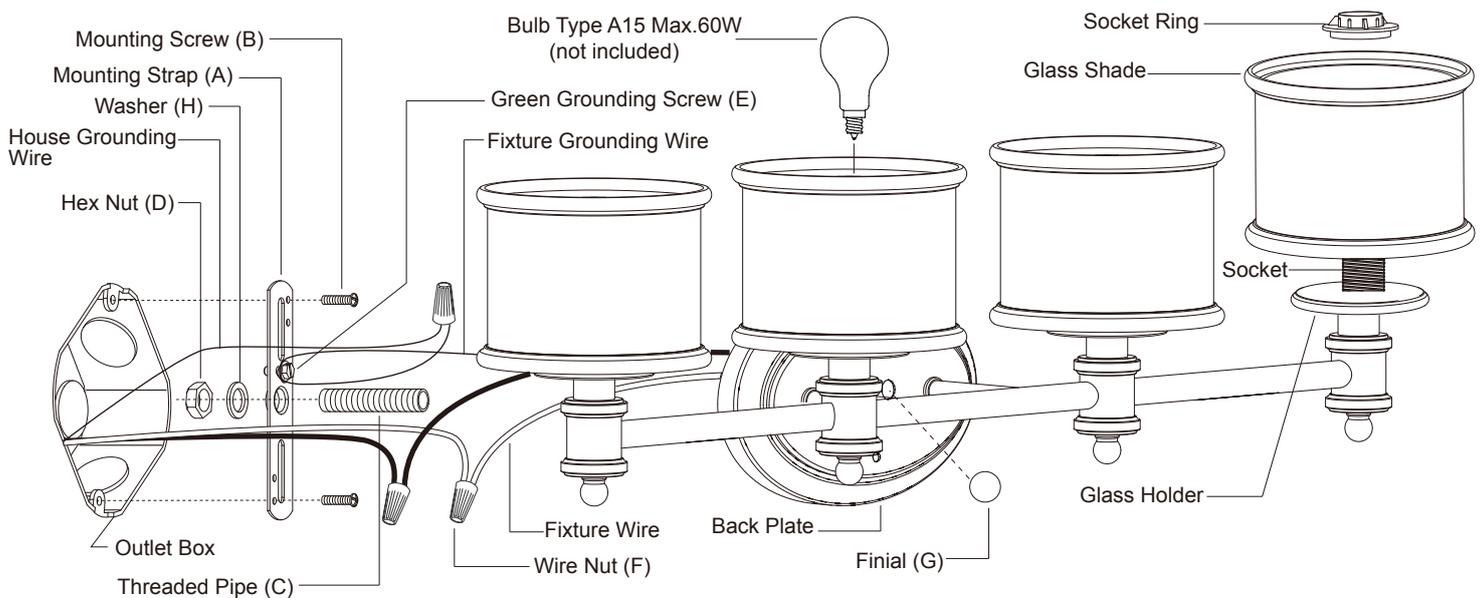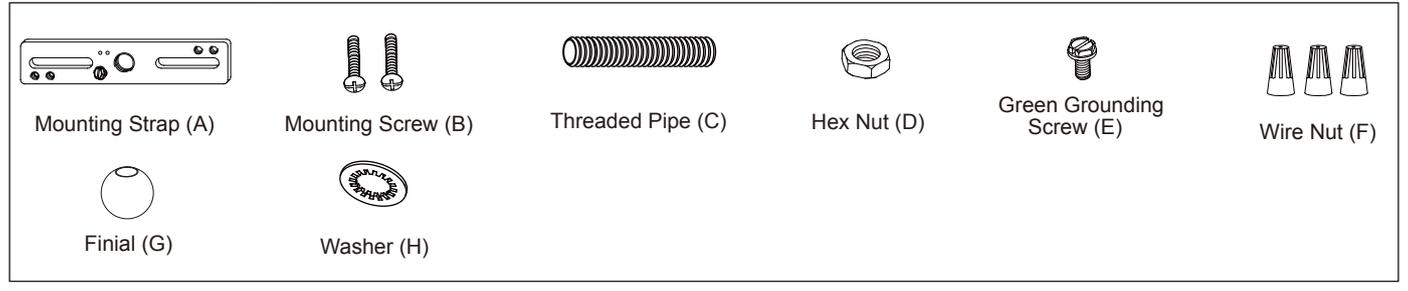

## Assembly Instructions:

**Turn off the power at fuse or circuit box.**

1. Attach threaded pipe to mounting strap, and then secure it with a washer and a hex nut.
2. Attach the mounting strap to outlet box by using two mounting screws.
3. Pull out the source wires from the outlet box. Make wire connections using wire nuts as follows:
  - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with the wire nut.Carefully put the wires back into the outlet box.
4. Attach the back plate to the mounting strap by inserting the threaded pipe, and then secure it with the finial.


5. Attach the glass shades onto the glass holders and secure them with the socket rings.

6. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.

**Turn on the power at fuse or circuit box.**



The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

 Mounting Strap (A)	 Mounting Screw (B)	 Threaded Pipe (C)
 Hex Nut (D)	 Green Grounding Screw (E)	 Wire Nut (F)
 Finial (G)	 Washer (H)	

→ Assembly Kit 4143MM (1 SET)

→ Glass Shade 9877FO

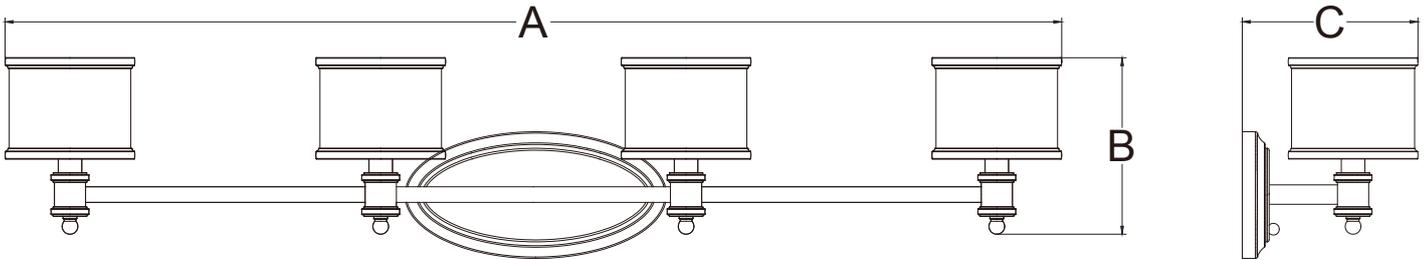

**A: 30-1/4"**  
**B: 8"**  
**C: 7-1/2"**