

CHD2031


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

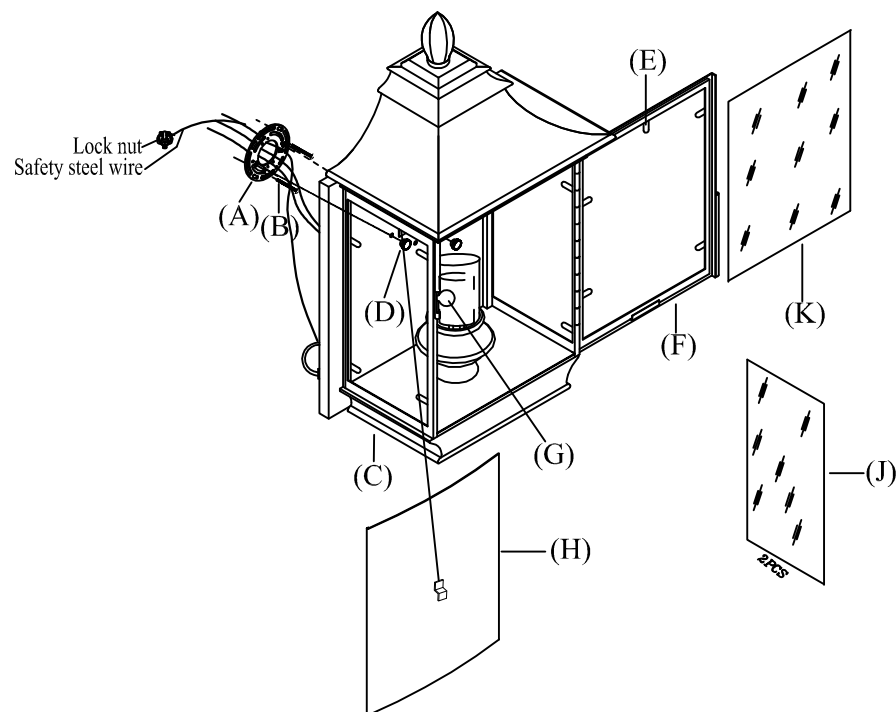

1. Open the front door (F) from lantern box (C) by pulling the locking pin (G).
2. To install glass panels (J) & (K) provided to each section, make sure metal tabs (E) are flipped against
3. the opening of the frame. Place glass panel (K) to front frame, secure glass panel (K) by bending back metal tabs (E) towards the glass panel. Insert other two glass panels (J) into the other sides of the lantern box (C).
4. Install safety steel wire to mounting plate (A) as shown in illustration A.
5. Attach ground (green) wire to ground wire from wall outlet box (usually green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
6. Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
7. Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Remove mounting plate (A) from lantern base (C) by removing cap nuts (D).
9. Position the mounting plate (A) diagonally so that the holes of mounting plate (A) and the wall outlet are aligned. Tighten the mounting plate (A) onto the wall outlet by mounting screws (B) provided.
10. Gently push the lantern box (C) onto affixed mounting plate (A), letting rods on mounting plate pass through the holes on the lantern box (C) and tighten by screwing cap nuts (D) to the exposed part of rods in clockwise direction.
11. Attach the light reflector (H) to the hook on inside of the lantern box (C).
12. Insert light bulbs into the sockets.
13. Close the front door (F) and secure by inserting locking pin (G).