



**CORD COVER MOUNTING OPTION**  
(Fig. 1)

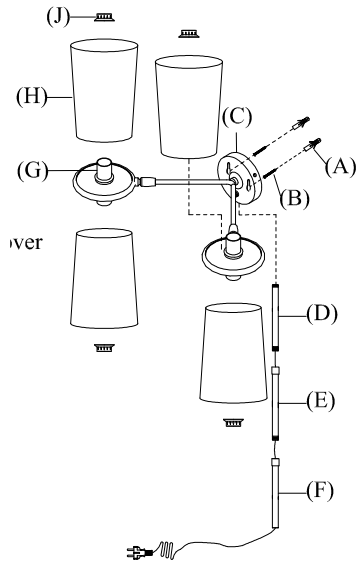

**DIRECT WIRE MOUNTING PLATE**  
(Fig. 2)

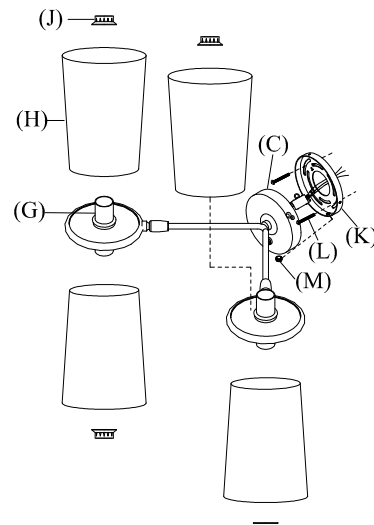

1. CORD COVER ASSEMBLY (See Fig. 1)
  1. Screw threaded nipple of cord cover (D) into bottom threaded opening of back plate (C). Thread cord cover (E) into cord cover (D), thread cord cover (F) to cord cover (E) and hand tighten. base (C). Mark two points with the same distance on the wall, make sure they
    2. Measure center points between both mounting holes at back of fixture are horizontal with each other.
    3. Drill small holes at both points, hole should be big enough to accommodate with plastic anchors (A). Install plastic anchors (A) into the holes in the wall.
    4. Insert mounting screws (B) into plastic anchors (A), make sure screw head 1/8" threads are visible.
    5. Hook fixture base (C) onto both screws (B).
    6. Remove threaded rings (J) from the lamp holders (G), place lamp shade (H) over the threaded section of lamp holders (G) and secure with threaded rings (J).
    7. Insert light bulbs (not included) into the lamp holders. Plug lamp into wall outlet.
3. DIRECT WIRE INSTALLATION (See Fig. 2)
 

We strongly recommend that a professional electrician install the fixture.

  1. Follow step I of CORD COVER ASSEMBLY.
  2. Guide wiring from wall outlet through center hole in mounting plate (K). Affix mounting plate (K) to wall outlet box with mounting screws (L) provided.
  3. Cut fixture cord twelve inches away from fixture base (C) and remove by grasping plug and pulling out of cord cover (D, E & F).
  4. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (C).
  5. Connect neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (C).
  6. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
  7. Close the cap of terminal block. Attach fixture base (C) to the affixed mounting plate (K), and secure with base screws (M). Follow steps 7 & 8 of CORD COVER ASSEMBLY.